



PRODUCT CATALOG



STANDOFFS



WL-ROD & WIRE



WIRE SUSPENSION



EZ-ROD & WIRE



STRUCTURELITE



HARDWARE



30 Years of Gyford Standoff Systems



A History of Quality

We design and manufacture precision aluminum and stainless steel decorative mounting components in Reno, Nevada.

Our selection of in-stock components includes a variety of standoffs, rod hardware and wire suspension systems. We also offer custom colors, finishes, shapes and sizes.

From one-on-one design support to round-the-clock online resources, our clients can come to us for what they need to complete a project. We make it our responsibility to uphold a growing and sustainable business for our customers, our team and our environment.

We are proud of our history and commitment to delivering quality products and services. We welcome you to learn about the little details that drive us every day and why we're passionate about what we do.

Our Mission

QUALITY

To consistently deliver quality U.S. manufactured products using the very best technology and hiring highly qualified employees.

SERVICE

To foster relationships with our clients and employees through exceptional knowledge and steadfast ethics.

INNOVATION

To be the leading designer and manufacturer of precision mounting components.

COMMUNITY

To support our community and uphold sustainable business practices by being environmentally and socially conscientious.

SHOP ONLINE:

standoffsystems.com

CALL US:

775.829.7272

Monday - Friday

7:00 a.m. - 3:30 p.m. (PST)

EMAIL US:

info@standoffsystems.com

Our Commitment to the Environment

We believe that, as an industry leader, we must be environmentally responsible. This principle is part of our business culture and has been a core value since we began full manufacturing operations in 1991. It is our commitment to provide a sustainable product, reduce waste, save energy and recycle materials. Our aluminum contains 55% recycled material and our stainless steel contains 90% recycled material. We are a proud member of the U.S. Green Building Council and continuously adapt our practices to minimize our environmental impact.



Our Commitment to Being American Made

We design and manufacture all our products in Reno, Nevada and source materials in the U.S. We are proud to keep jobs in America and contribute to our nation’s economic independence.



For more information about how we can help with your LEED qualifications, visit: standoffsystems.com/green

Recyclable
Aluminum is the only metal that can be infinitely recycled.

Light
Aluminum is light-weight and strong, reducing the shipping costs and carbon footprint.

Non-toxic anodized finish
Anodizing is environmentally safe and meets safety directives of the FDA, USDA, WEE and RoHS.

Corrossion-resistant
Aluminum and 316 stainless steel are protected by their own naturally occurring oxide film.

Efficient machines
have reduced our power usage by 37%.

Wastewater evaporators
reduce environmental impact and operational cost.

Solvents and oils
that we use are classified as non-hazardous waste by the EPA.

Air handlers
reduce particulates created during the machining process.

Rotary screw compressors
use less power and cycle less often than traditional compressors.



Catalog Contents

Inspiration Gallery	A:4
Standoffs	SO
WL-Rod & Wire	WL
Wire Suspension	WS
EZ-Rod & Wire	EZ
StructureLite	SL
Hardware	HD
Demonstration Displays	B:1
Finishes & Colors	B:3
FAQ	B:4

SHOP ONLINE:
standoffsystems.com

CALL US:
775.829.7272
Monday - Friday
7:00 a.m. - 3:30 p.m. (PST)

EMAIL US:
info@standoffsystems.com

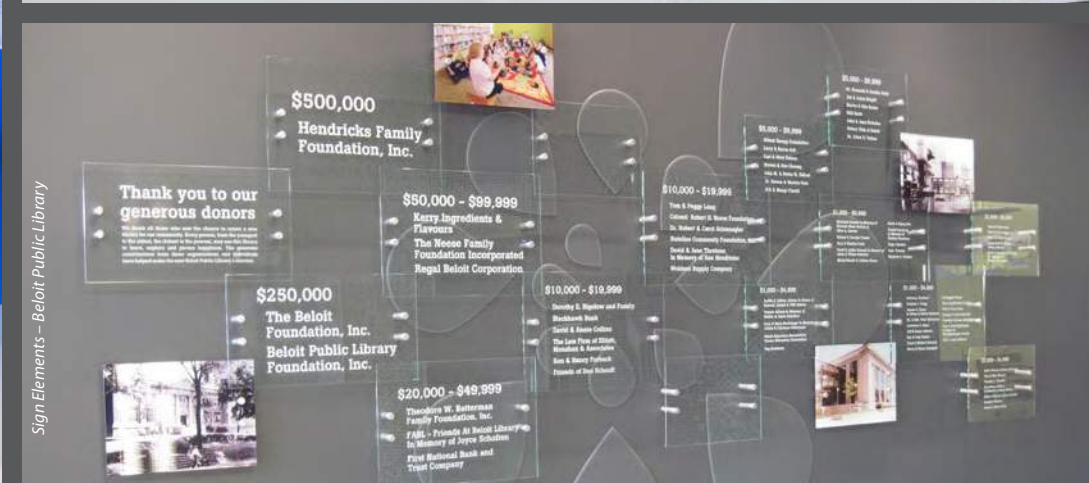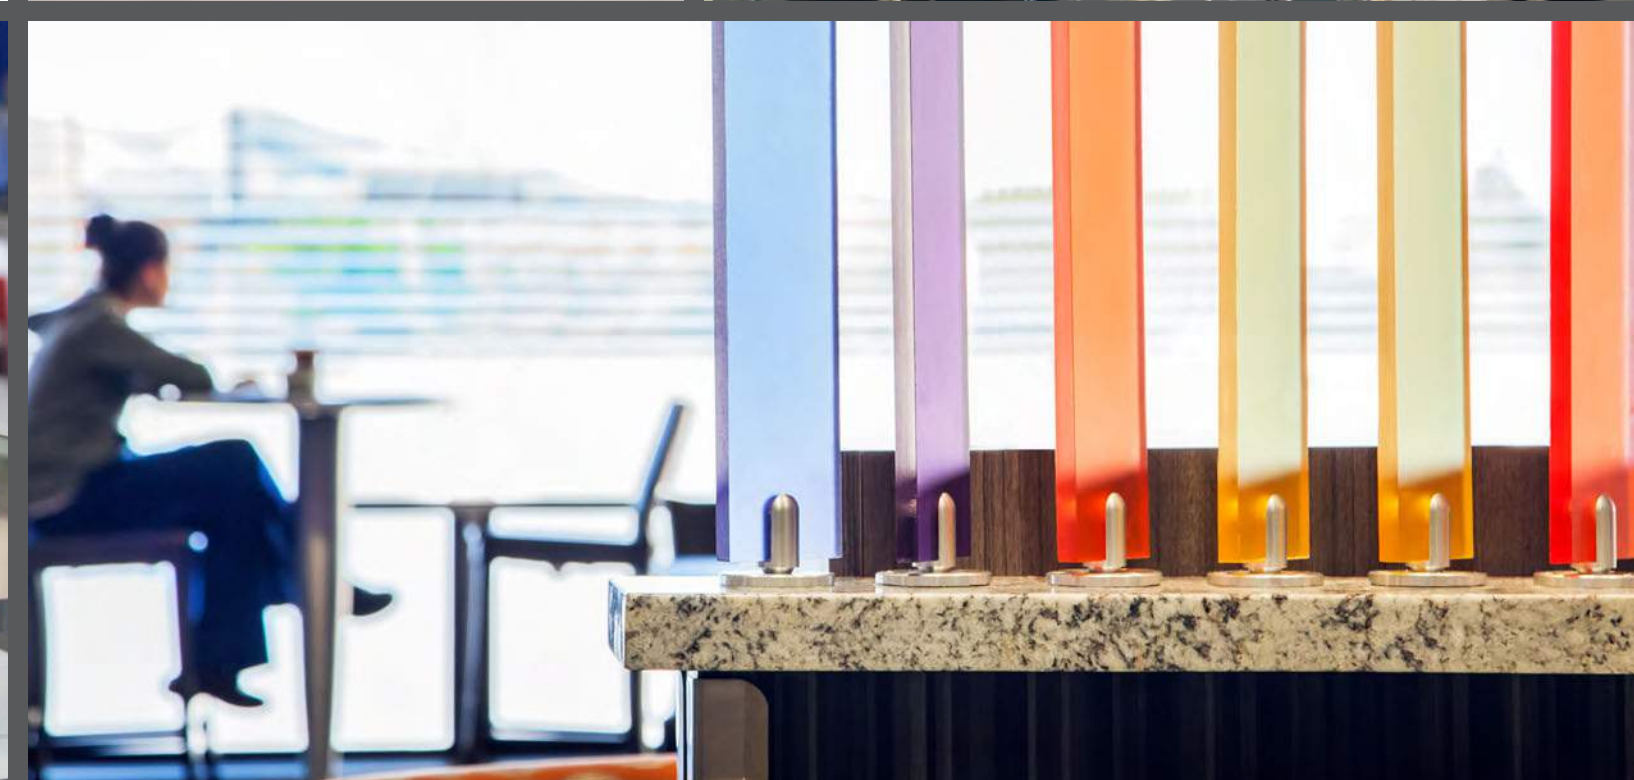




Standoffs

Standoff Assembly	SO:2
Standard Standoff Caps	SO:4
Low Profile Standoff Caps	SO:5
Security Standoff Caps	SO:6
Specialty Standoff Caps	SO:7
Standoff Barrels	SO:8
LED Standoffs	SO:11
Standoff Hubs	SO:12
Panel Clips	SO:13
Standoff Grippers	SO:14
Non-Adjustable Edge Grips	SO:16
Adjustable Edge Grips	SO:18
Panel Hinges	SO:20
Standoff Kits	SO:22
Standoff Index	SO:24



Standoffs are designed to mount signs, architectural panels, glass, banners, photographs, artwork and just about any other material at a fixed distance from a surface. They're available in different shapes and sizes to accommodate any design.

5/16-18 THREADED CAP AND BARREL

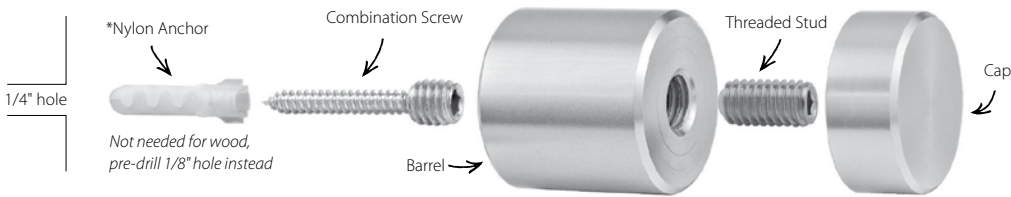

- 1

Use the holes in your material as a template to mark drill-holes on your mounting surface.
- 2

Pre-drill 1/4" holes in your surface, then insert nylon anchors into the holes and tap them flush.
- 3


Drive your combination screws into the nylon anchors, then tighten barrels against the surface.
- 4

Screw threaded studs into your barrels, then place your panel into position and thread the caps on until snug.

Tip

- We recommend 3/8" holes in your material to give you more freedom for aligning your panels

10-24 THREADED CAP AND BARREL

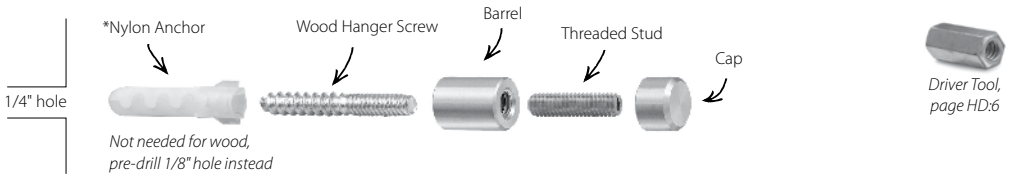

- 1

Use the holes in your material as a template to mark drill-holes on your mounting surface.
- 2

Pre-drill 1/4" holes in your surface, then insert nylon anchors into the holes and tap them flush.
- 3

Use the included driver tool, drive your hanger screws into the nylon anchors, then tighten barrels against the surface.
- 4

Screw threaded studs into your barrels, then place your panel into position and thread the caps on until snug.

Tip

- We recommend 7/32" holes in your material to give you more freedom for aligning your panels
- A wood hanger screw driver tool is included to drive the screw into the nylon anchor or wood


TOOLS FOR STANDOFFS



PART	PURPOSE
HD-HBD2	3/32" hex tool for SO-CAP17, 18 and 19
HD-HBD4	5/32" hex tool for SO-SCB, 1 and 2
HD-HLK2	3/32" allen wrench for SO-CAP17, 18 and 19
HD-HLK4	5/32" allen wrench for SO-SCB, 1 and 2
HD-SCT	Tighten SO-SC3, 9 and 10 & SO-SSCAP1R, 2R, 3 and 4
HD-NW	For SO-CAP11, 12, 13, 14 and 23

For more details, see our Hardware section

EDGE GRIPS

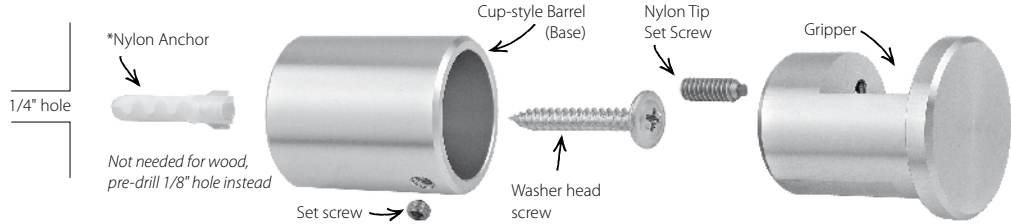

- 1

Mount the grippers to your panel by placing the grippers on the edges and tightening the nylon tips against the back of the panel.
- 2

Hold the panel and grippers level against the mounting surface and press to create dimpled marks in the surface.
- 3

Pre-drill 1/4" holes in your surface at your marks. Insert nylon anchors and tap them flush.
- 4

Mount barrels to the surface with the washer head screws, then insert the grippers and tighten the set screws.

Tips


- For material over 1/2" thick, temporarily remove nylon tip set screws to make dimpled marks
- Align the barrels so the flat side of the gripper will line up with the barrel's set screw hole

PANEL CLIPS

Note

- Panel clips include two vinyl shims to accommodate different material thicknesses, see table below

Material Thickness	Vinyl Shims
1/8"	2
3/16"	1
1/4"	0

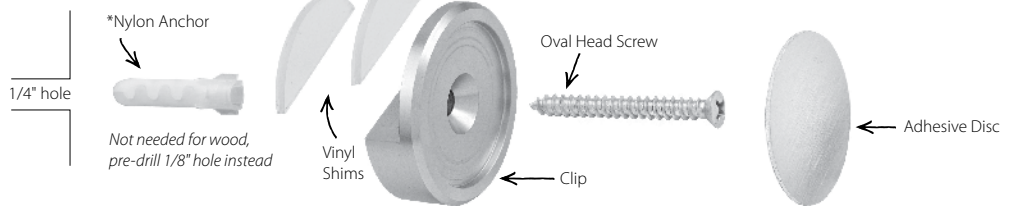

- 1

Mark the mounting surface 3/16" above and below the desired location of your panel edges.
- 2

Pre-drill 1/4" holes in the surface at your marks. Insert anchors in the holes and tap them flush.
- 3

Drive oval head screws into the anchors through the clip. Slide in the panel and install the upper clips.
- 4

Remove the adhesive backing from the discs and place one into the recess on the face of each clip.

Tip

- Panel clips should be installed at the top and bottom and at least 2-3" in from the sides of glass mirrors (plastic materials not critical)

THREADED STUDS FOR STANDOFF ASSEMBLY

Standoff Caps come with a removable threaded stud up to 1-1/2" long. Longer lengths are available for an additional charge. Our Client Solution Specialists will assist in determining the correct stud length for your application. To find our selection of threaded studs for standoff assembly, see page HD:2.



STANDOFF KITS


For your convenience we offer complete standoff kits. Kits come in a variety of diameters and lengths with everything you need to get started on your project, including a set of four (4) standoffs with assembly and installation hardware and instructions.

Find our selection of Standoff Kits, starting on page SO:22.



STANDARD CAP

Aluminum

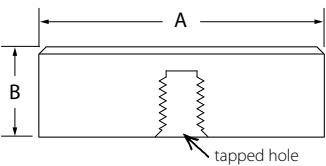

SO-CAP3


	PART	DIA. (A)	CAP HEIGHT (B)	TAPPED	THREAD DEPTH
	SO-CAP25	1/4"	5/32"	6-32	1/8"
● ●	SO-CAP7	3/8"	1/4"	10-24	1/8"
● ●	SO-CAP8	5/8"	5/16"	5/16-18	3/16"
	SO-CAP8CU	5/8"	5/16"	10-24	3/16"
	SO-CAP75	3/4"	5/16"	5/16-18	3/16"
● ●	SO-CAP9	1"	3/8"	5/16-18	1/4"
	SO-CAP9CU	1"	3/8"	1/4-20	1/4"
●	SO-CAP3	1-1/4"	1/2"	5/16-18	3/8"
●	SO-CAP10	1-1/2"	1/2"	5/16-18	3/8"
	SO-CAP22R	2"	5/8"	5/16-18	3/8"

- Custom finishes available
- Available in brass anodize
 - Available in black anodize
 - Additional cost and lead time may apply

- Assembly hardware included
- (1) Threaded stud up to 1-1/2" long. Specify stud or material thickness. See page HD:2
- Note
- Installation hardware sold separately. See Hardware section for available options
 - Buy as a pre-packaged kit. See page SO:22

STAINLESS STEEL CAP

316 Stainless Steel



SO-SSCAP100

	PART	DIA. (A)	CAP HEIGHT (B)	TAPPED	THREAD DEPTH
	SO-SSCAP50	1/2"	5/16"	10-24	3/16"
	SO-SSCAP75	3/4"	5/16"	1/4-20	3/16"
	SO-SSCAP100	1"	3/8"	5/16-18	3/16"
	SO-SSCAP125	1-1/4"	5/16"	5/16-18	3/16"

- Assembly hardware included
- (1) Threaded stud up to 1-1/2" long. Specify stud or material thickness. See page HD:2
- Note
- Installation hardware sold separately. See Hardware section for available options
 - Buy as a pre-packaged kit. See page SO:22

LOW PROFILE CAP


WITH STEM

Aluminum

	PART	DIA. (A)	CAP HEIGHT	STEM LENGTH	STEM DIA.	TAPPED	THREAD DEPTH
●	SO-CAP11	1"	1/8"	1/4"	1/2"	5/16-18	1/4"
	SO-CAP12	1-1/4"	1/8"	1/4"	1/2"	5/16-18	1/4"
	SO-CAP13	1-1/2"	1/8"	1/4"	1/2"	5/16-18	1/4"
	SO-CAP23	2"	1/8"	1/4"	1/2"	5/16-18	1/4"
	SO-CAP14	2-1/2"	1/8"	1/4"	1/2"	5/16-18	1/4"

- Custom finishes available
- Available in black anodize
 - Additional cost and lead time may apply

- Assembly hardware included
- (1) Threaded stud up to 1-1/2" long. Specify stud or material thickness. See page HD:2
- Note
- Tighten with neoprene wrench (HD-NW). See page HD:15
 - 1/4" minimum material thickness

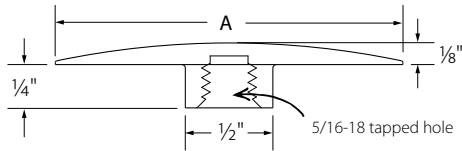


SO-CAP23

LOW PROFILE CAP WITH INTEGRATED STUD

Aluminum

	PART	DIA. (A)	THREAD	THREAD LENGTH (B)	CAP HEIGHT
	SO-CAP17	3/8"	10-24	1/2"	1/8"
	SO-CAP18	5/8"	5/16-18	1/4"	1/8"
	SO-CAP19	5/8"	5/16-18	5/8"	1/8"



SO-CAP17



SO-CAP18



SO-CAP19

FINISHING CAP WITH INTEGRATED STUD

Aluminum

	PART	DIA.	THREAD	THREAD LENGTH	CAP HEIGHT
	SO-CAP15	1"	1/2-20	3/16"	1/16"
	SO-CAP16	7/8"	5/16-18	1/4"	1/16"
	SO-CAP26	5/8"	5/16-18	1/4"	1/16"






SO-CAP15




SO-CAP16



SO-CAP26




SECURITY CAP WITH INTEGRATED STUD
Aluminum

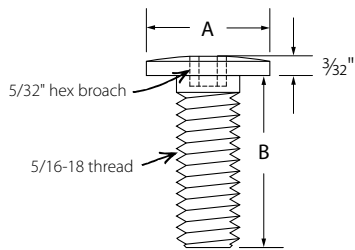

PART	DIA. (A)	THREAD	THREAD LENGTH (B)	CAP HEIGHT
SO-SCB	5/8"	5/16-18	23/32"	3/32"
SO-SCB1	5/8"	5/16-18	27/32"	3/32"
SO-SCB2	5/8"	5/16-18	31/32"	3/32"

Note
• Tighten cap with a 5/32" hex key wrench (HD-HLK4). See page HD:15

SECURITY CAP
Aluminum

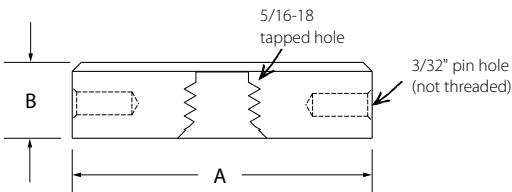


SO-SC3

PART	DIA. (A)	CAP HEIGHT (B)	TAPPED	THREAD DEPTH	HOLE(S)
SO-SC9	1"	5/16"	5/16-18	3/16"	(2) 3/32"
SO-SC3	1-1/4"	5/16"	5/16-18	3/16"	(2) 3/32"
SO-SC10	1-1/2"	5/16"	5/16-18	3/16"	(2) 3/32"

Assembly hardware included
• (1) Threaded stud up to 1-1/2" long. Specify stud or material thickness. See page HD:2

Note
• Tighten cap with security cap tool (HD-SCT). See page HD:15

SECURITY CAP WITH STEM
316 Stainless Steel

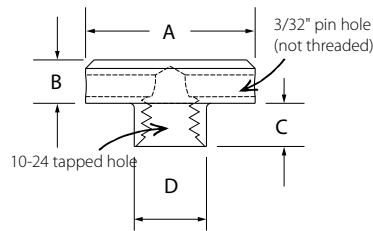


PART	DIA. (A)	CAP HEIGHT (B)	STEM LENGTH (C)	STEM DIA. (D)	TAPPED	HOLE(S)
SO-SSCAP1R	1/2"	3/16"	1/8"	1/4"	10-24	(1) 3/32"
SO-SSCAP2R	3/4"	3/16"	3/16"	5/16"	1/4-20	(2) 3/32"
SO-SSCAP3	1"	3/16"	3/16"	7/16"	5/16-18	(2) 3/32"
SO-SSCAP4	1-1/4"	3/16"	3/16"	7/16"	5/16-18	(2) 3/32"

Assembly hardware included
• (1) Threaded stud up to 1-1/2" long. Specify stud or material thickness. See page HD:2

Note
• Tighten cap with security cap tool (HD-SCT). See page HD:15

EXTRUSION CAP
Aluminum

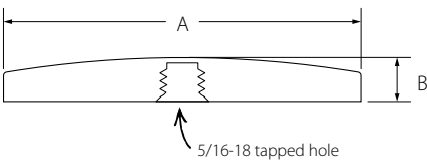


PART	DIA. (A)	CAP HEIGHT (B)	TAPPED	THREAD DEPTH
SL-1.25PCAP	1-1/4"	5/16"	5/16-18	3/16"
SL-2.5PCAP	2-1/2"	5/16"	5/16-18	3/16"

Assembly hardware included
• (1) Threaded stud up to 1-1/2" long. Specify stud or material thickness. See page HD:2

Note
• These StructureLite Caps are designed for extrusion, but work as Standoff caps for barrels of the same diameter


HEX CAP
Aluminum



PART	DIA. (A)	CAP HEIGHT (B)	TAPPED	THREAD DEPTH
SO-HCAP1	1"	3/8"	5/16-18	1/4"
SO-HCAP2	1-1/4"	3/8"	5/16-18	1/4"

Assembly hardware included
• (1) Threaded stud up to 1-1/2" long. Specify stud or material thickness. See page HD:2

SQUARE CAP
Aluminum




PART	WIDTH	CAP HEIGHT	TAPPED	THREAD DEPTH
SO-CAP20	1"	3/8"	5/16-18	1/4"

Assembly hardware included
• (1) Threaded stud up to 1-1/2" long. Specify stud or material thickness. See page HD:2



STANDARD BARREL
1/4" to 1" DIAMETER
Aluminum

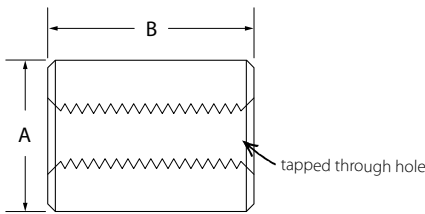


	PART	DIA. (A)	LENGTH (B)	TAPPED	DESCRIPTION
	SO-2525	1/4"	3/16"	9/64"	drilled through
	SO-025	3/8"	1/4"	13/64"	drilled through
● ●	SO-050	3/8"	1/2"	10-24	tapped through
	SO-010R	3/8"	1"	10-24	tapped through
	EZ-SP1	5/8"	3/16"	5/16"	drilled through
● ●	SO-500	5/8"	1/2"	5/16-18	tapped through
●	SO-750	5/8"	3/4"	5/16-18	tapped through
●	SO-100	5/8"	1"	5/16-18	tapped through
	SO-150	5/8"	1-1/2"	5/16-18	tapped through
	SO-200	5/8"	2"	5/16-18	1" both ends
	SO-300	5/8"	3"	5/16-18	1" both ends
	SO-BAR5	5/8"	5-3/4"	5/16-18	1" both ends
	SO-BAR9	5/8"	9-3/4"	5/16-18	1" both ends
	SO-BAR11	5/8"	11-3/4"	5/16-18	1" both ends
	SO-75075	3/4"	3/4"	5/16-18	tapped through
	SO-75100	3/4"	1"	5/16-18	tapped through
	SO-75125	3/4"	1-1/4"	5/16-18	tapped through
	SO-9025	1"	1/4"	5/16-18	tapped through
● ●	SO-9050	1"	1/2"	5/16-18	tapped through
●	SO-9075	1"	3/4"	5/16-18	tapped through
● ●	SO-9100	1"	1"	5/16-18	tapped through
	SO-9100CU	1"	1"	1/4-20	tapped through
●	SO-9150	1"	1-1/2"	5/16-18	tapped through
●	SO-9200	1"	2"	5/16-18	1" both ends
	SO-9300	1"	3"	5/16-18	1" both ends
	SO-9400	1"	4"	5/16-18	1" both ends
	SO-9600	1"	6"	5/16-18	1" both ends

Custom finishes available
● Available in brass anodize
● Available in black anodize
• Additional cost and lead time may apply

Note
• Installation hardware sold separately.
See Hardware section for available options

STANDARD BARREL
1-1/4" to 2" DIAMETER
Aluminum

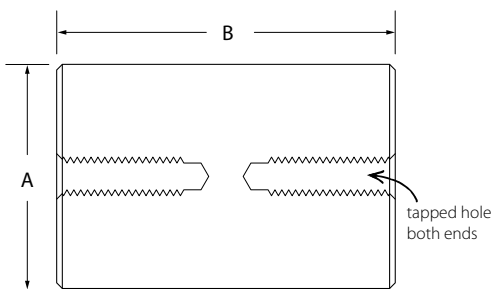

	PART	DIA. (A)	LENGTH (B)	TAPPED	DESCRIPTION
	SO-250	1-1/4"	1/4"	5/16-18	tapped through
	SO-625	1-1/4"	5/8"	5/16-18	tapped through
	SO-1	1-1/4"	1"	5/16-18	tapped through
	SO-115	1-1/4"	1-1/2"	5/16-18	tapped through
	SO-2	1-1/4"	2"	5/16-18	1" both ends
	SO-3	1-1/4"	3"	5/16-18	1" both ends
	SO-4	1-1/4"	4"	5/16-18	1" both ends
	SO-6	1-1/4"	6"	5/16-18	1" both ends
	SO-8	1-1/4"	8"	5/16-18	1" both ends
	SO-10	1-1/4"	10"	5/16-18	1" both ends
	SO-12	1-1/4"	12"	5/16-18	1" both ends
	SO-1525	1-1/2"	1/4"	5/16-18	tapped through
	SO-1505	1-1/2"	1/2"	5/16-18	tapped through
	SO-151	1-1/2"	1"	5/16-18	tapped through
	SO-152	1-1/2"	2"	5/16-18	1" both ends
	SO-153	1-1/2"	3"	5/16-18	1" both ends
	SO-154	1-1/2"	4"	5/16-18	1" both ends
	SO-201R	2"	1"	5/16-18	tapped through
	SO-202R	2"	2"	5/16-18	1" both ends
	SO-203R	2"	3"	5/16-18	1" both ends
	SO-204R	2"	4"	5/16-18	1" both ends
	SO-206R	2"	6"	5/16-18	1" both ends


Note
• Installation hardware sold separately.
See Hardware section for available options



STANDOFF BARRELS

STAINLESS STEEL BARREL

316 Stainless Steel

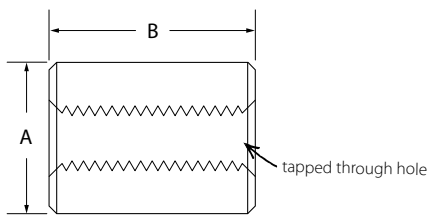

PART	DIA. (A)	LENGTH (B)	TAPPED	DESCRIPTION
SO-SS1500	1/2"	1/2"	10-24	tapped through
SO-SS1750	1/2"	3/4"	10-24	tapped through
SO-SS2500	3/4"	1/2"	1/4-20	tapped through
SO-SS2750	3/4"	3/4"	1/4-20	tapped through
SO-SS2100	3/4"	1"	1/4-20	tapped through
SO-SS3750	1"	3/4"	5/16-18	tapped through
SO-SS3100	1"	1"	5/16-18	tapped through
SO-SS4100	1-1/4"	1"	5/16-18	tapped through
SO-SS4150	1-1/4"	1-1/2"	5/16-18	3/4" both ends


Note

- Installation hardware sold separately. See Hardware section for available options



SQUARE BARREL

Aluminum

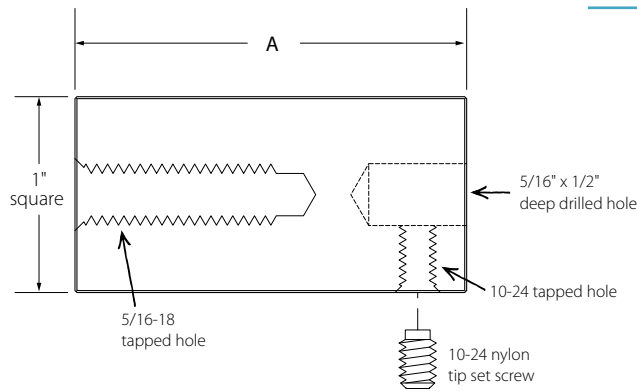

PART	WIDTH	LENGTH (A)	TAPPED	THREAD DEPTH
SO-ASQ1	1"	1"	5/16-18 one end	1/2"
SO-ASQ2	1"	2"	5/16-18 one end	1"


Assembly hardware included

- (1) Nylon tip socket set screw (HD-NT2)



LED STANDOFF BARREL

Aluminum



PART	DIA. (A)	LENGTH (B)	TAPPED	DESCRIPTION
SO-9050-LED	1"	1/2"	5/16-18	tapped through
SO-9100-LED	1"	1"	5/16-18	tapped through
SO-9150-LED	1"	1-1/2"	5/16-18	tapped through

Tip

- Installation hardware sold separately. See Hardware section for available options

Note

- Pair with 1" diameter standoff cap



LED LIGHT BOARD

4 colors



PART	COLOR	WIRE LENGTH
SO-LED-RED	red	4'
SO-LED-WHITE	white	4'
SO-LED-BLUE	blue	4'
SO-LED-GREEN	green	4'

Note

- Comes attached with 4' of wire


LED POWER SUPPLY

Powers light boards

PART	OUTPUT	WIRE LENGTH	USE FOR
SO-LED-PS	28v, 640ma	6'	Wall outlet
SO-LED-HWPS	24v, 640ma	6"	Hardwired installations

Tip


- SO-LED-PS Powers up to 16 LED Light Boards
- SO-LED-HWPS Powers up to 14 LED Light Boards

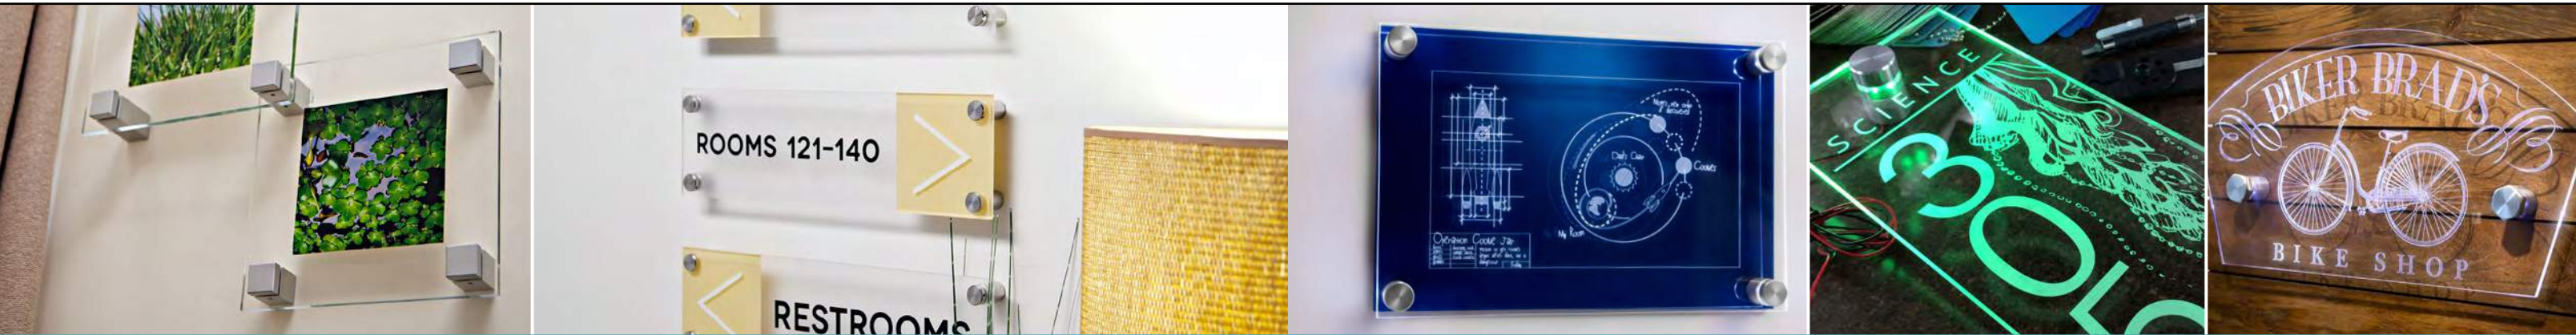

1" DIAMETER 4-WAY HUB

Aluminum

5/16" though hole



SO-04H-250R


SO-04H-375R

PART	DIA.	THICKNESS
SO-04H-250R	1"	1/4"
SO-04H-375R	1"	3/8"

1-1/4" DIAMETER 4-WAY HUB

Aluminum

5/16" though hole



SO-14H-250R

SO-14H-375R


SO-14H-500R

PART	DIA.	THICKNESS
SO-14H-250R	1-1/4"	1/4"
SO-14H-375R	1-1/4"	3/8"
SO-14H-500R	1-1/4"	1/2"

1-1/2" DIAMETER 4-WAY HUB

Aluminum

5/16" though hole

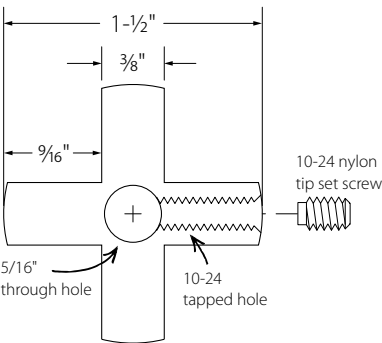

SO-A24H-250

SO-A24H-375


SO-A24H-500

PART	DIA.	THICKNESS	SIDE TAPPED
SO-A24H-250	1-1/2"	1/4"	10-24
SO-A24H-375	1-1/2"	3/8"	10-24
SO-A24H-500	1-1/2"	1/2"	10-24

- Assembly hardware included
- (1) Nylon tip socket set screw (HD-NT2)

PANEL CLIP WITH BRUSHED DISC

Aluminum

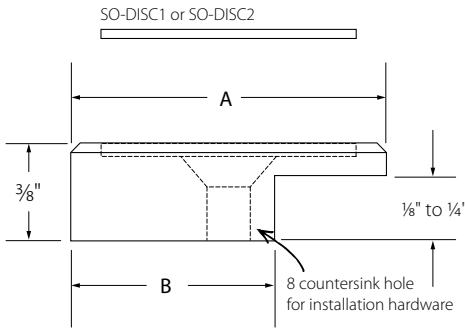

Includes Finishing Disc, SO-DISC1 or SO-DISC2, See page SO:13



SO-APC-100



SO-APC-125

PART	DIA. (A)	WIDTH (B)	HOLDS (C)
SO-APC-100	1"	11/16"	1/8", 3/16", 1/4"
SO-APC-125	1-1/4"	13/16"	1/8", 3/16", 1/4"


- Installation hardware included
- (1) Oval head screw (HD-PS2)
 - (1) All-purpose wall anchor (HD-FDA1)

- Assembly hardware included
- SO-APC-100
- (2) Panel Clip shims (HD-VS-100)
 - (1) Adhesive Finishing Disc (SO-DISC2)
- SO-APC-125
- (2) Panel Clip shims (HD-VS-125)
 - (1) Adhesive Finishing Disc (SO-DISC1)

- Note
- Use included vinyl shims to accommodate different material thicknesses. See page HD:12
- Tip
- Buy as a pre-packaged kit containing four (4) panel clips with installation instructions and hardware. See page SO:23



ADHESIVE FINISHING DISC



SO-DISC2




SO-DISC1

PART	DIA. (A)	THICKNESS	FITS	FINISH
SO-DISC2	7/8"	1/32"	1" dia. edge grips	Brushed Aluminum
SO-DISC1	1"	1/32"	1-1/4" dia. edge grips	Brushed Aluminum

- Note
- Very high-bond adhesive-backed



Cardosi Kiper Design Group

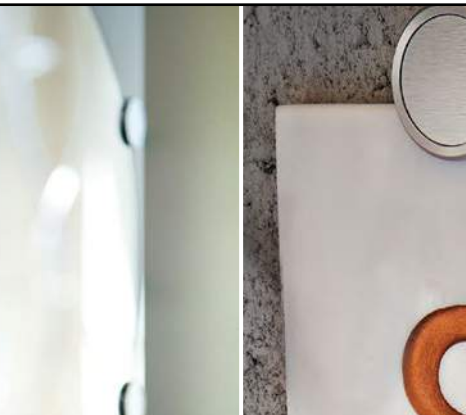

STANDOFF GRIPPER

Aluminum

PART	HOLDS	DIA. (A)	HEIGHT (B)	SLOT WIDTH (C)	SLOT DEPTH (D)	TO SCREW (E)	BASE (F)
SO-AGR-250	1/4"	1-1/4"	2-1/8"	.281"	1-13/16"	1-3/16"	5/16"
SO-AGR-375	3/8"	1-1/4"	2-1/16"	.445"	1-3/4"	1-3/16"	5/16"
SO-AGR-500	1/2"	1-1/2"	2-3/8"	.547"	2-1/16"	1-5/16"	5/16"
SO-AGR-750	3/4"	1-3/4"	3-3/16"	.780"	2-11/16"	1-5/16"	1/2"



Assembly hardware included

SO-AGR-250 & SO-AGR-375

- (1) Cup point socket set screw (HD-S19)
- (1) Cup point socket set screw (HD-NT7)

SO-AGR-500 & SO-AGR-750

- (1) Cup point socket set screw (HD-S21)
- (1) Cup point socket set screw (HD-NT8)




Note

- Installation hardware sold separately. See Hardware section for available options
- Nylon tip set screw provided for glass and other materials




Tip

- To attach a gripper to a standoff barrel, use a Transition Ring (SO-TR) for SO-AGR-250 to 500 or directly attach a 1" diameter barrel for SO-AGR-750. See page SO:15

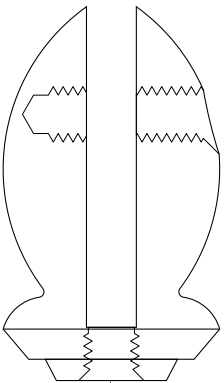

5/16" tapped hole for installation hardware

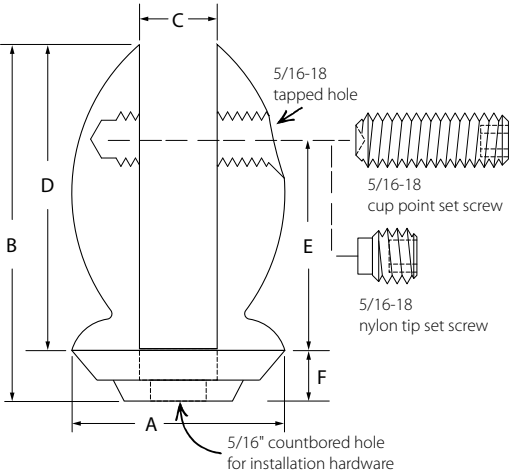

SO-AGR-250
(For 1/4" material)



SO-AGR-375
(For 3/8" material)



SO-AGR-500
(For 1/2" material)




SO-AGR-750
(For 3/4" material)

STANDOFF GRIPPER

WITH BASE PLATE

Aluminum

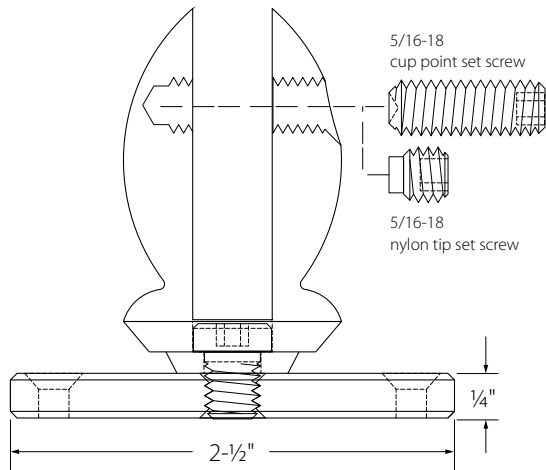

SO-AGR-375WMBT
(For 3/8" material)



Installation hardware included

- (3) Oval head screw (HD-PS2)



Assembly hardware included

SO-AGR-250WMBL

- (1) Cup point socket set screw (HD-S19)
- (1) Low head socket cap screw (HD-LHD65)

SO-AGR-375WMBT

- (1) Cup point socket set screw (HD-S19)
- (1) Low head socket cap screw (HD-LHD7)

SO-AGR-500WMBT

- (1) Cup point socket set screw (HD-S21)
- (1) Low head socket cap screw (HD-LHD7)

SO-AGR-750WMBT

- (1) Cup point socket set screw (HD-S21)
- (1) Low head socket cap screw (HD-LHD8)




Note

- Installation hardware sold separately. See Hardware section for available options
- Nylon tip set screw available for glass and other materials

TRANSITION RING

Aluminum

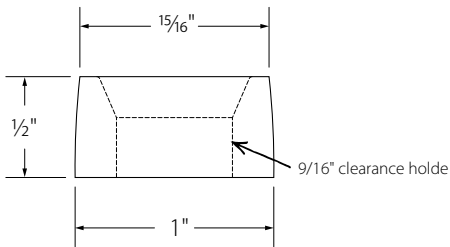


PART	DIA.	LENGTH	TAPPED	DESCRIPTION
SO-TR	1"	1/2"	drilled through	transition ring




Note

- For attaching a gripper to a barrel, use this Transition Ring for SO-AGR-250 to 500. See page SO:14

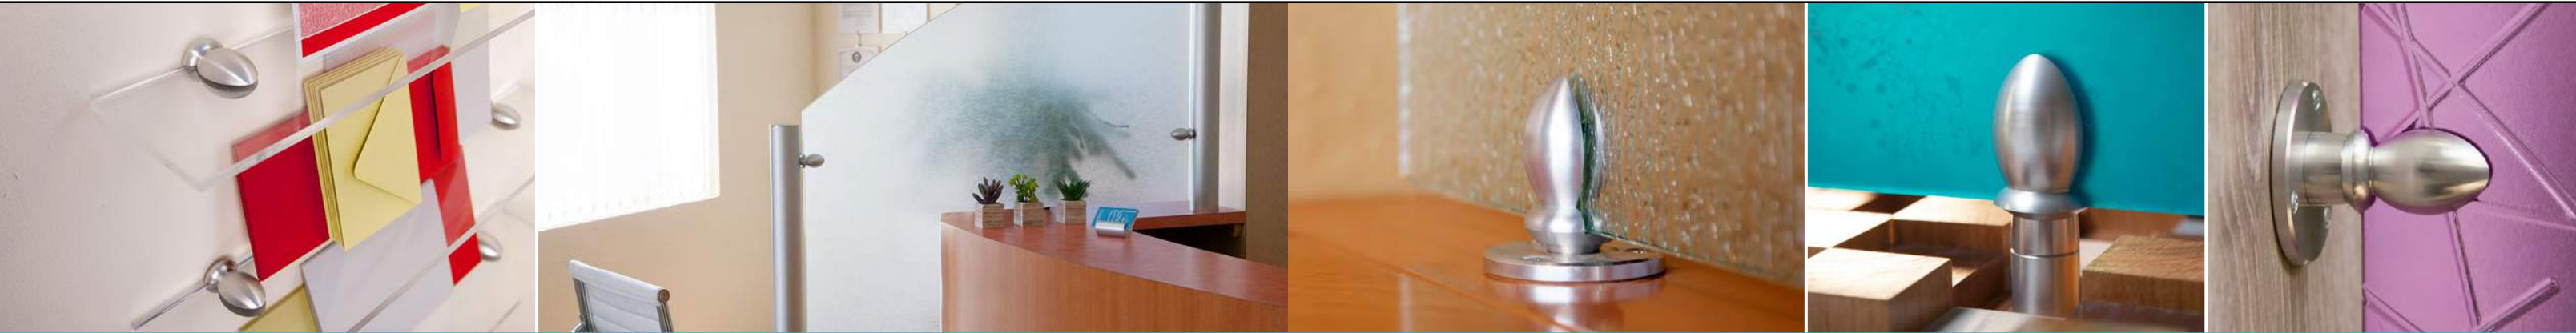

NON-ADJUSTABLE EDGE GRIP
WITH ADHESIVE DISC
Aluminum

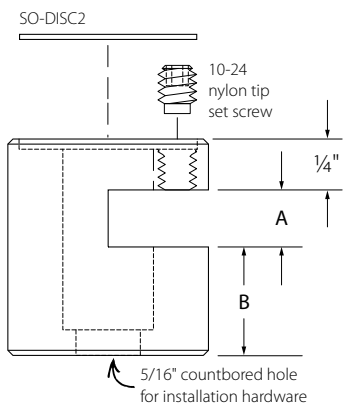

PART	DIA.	HOLDS	SLOT (A)	BASE (B)
SO-AEGC-125	1"	1/8"	5/32"	21/32"
SO-AEGC-250	1"	1/4"	9/32"	17/32"
SO-AEGC-375	1"	3/8"	13/32"	13/32"
SO-AEGC-500	1"	1/2"	17/32"	9/32"

- Assembly hardware included
- (1) Adhesive finishing disc (SO-DISC2)
 - (1) Nylon tip socket set screw (HD-NT1)
- Tip
- Installation hardware sold separately. See Hardware section for available options




Includes Finishing Disc, SO-DISC2. See page SO:13



SO-AEGC-125 (For 1/8" material) SO-AEGC-250 (For 1/4" material) SO-AEGC-375 (For 3/8" material) SO-AEGC-500 (For 1/2" material)

NON-ADJUSTABLE EDGE GRIP
WITH THREADED CAP
Aluminum

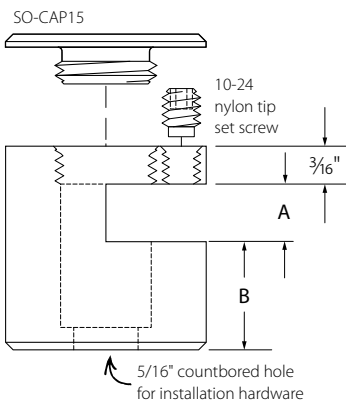

PART	DIA.	HOLDS	SLOT (A)	BASE (B)
SO-AEGTC125-15	1"	1/8"	5/32"	21/32"
SO-AEGTC250-15	1"	1/4"	9/32"	17/32"
SO-AEGTC375-15	1"	3/8"	13/32"	13/32"
SO-AEGTC500-15	1"	1/2"	17/32"	9/32"


- Assembly hardware included
- (1) Cap for 1" diameter edge grips (SO-CAP15)
 - (1) Nylon tip socket set screw (HD-NT1)
- Tip
- Installation hardware sold separately. See Hardware section for available options



Includes Finishing Cap, SO-CAP15. See page SO:5



SO-AEGTC125-15 (For 1/8" material) SO-AEGTC250-15 (For 1/4" material) SO-AEGTC375-15 (For 3/8" material) SO-AEGTC500-15 (For 1/2" material)

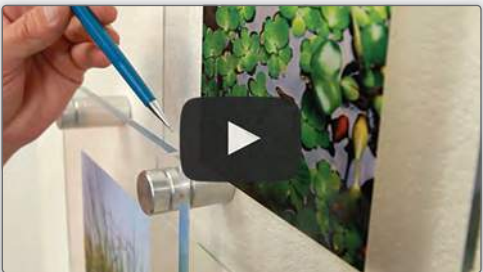

How-to Videos
www.standoffsystems.com/howto

Visit our library of "how-to" videos on our website. Our Tech Lead will walk you through installing Gyford Standoff Systems parts and hardware.



Inspirational Photo Galleries
www.standoffsystems.com/photo-gallery


- Signage/Awards
- Interior Design/Construction
- Shelving/Displays
- Art/Framing
- Retail/POP
- Exhibits/Museums



ADJUSTABLE EDGE GRIP

Aluminum

PART	DIA. (A)	HEIGHT (B)	HOLDS (C)	BARREL (D)
SO-APEG75	3/4"	1-5/16" to 1-7/16"	1/8" to 1/4"	1"
SO-APEG9	1"	1-9/16" to 1-15/16"	1/8" to 1/2"	1-1/4"
SO-APEG3	1-1/4"	1-13/16" to 2-17/16"	1/8" to 3/4"	1-1/2"

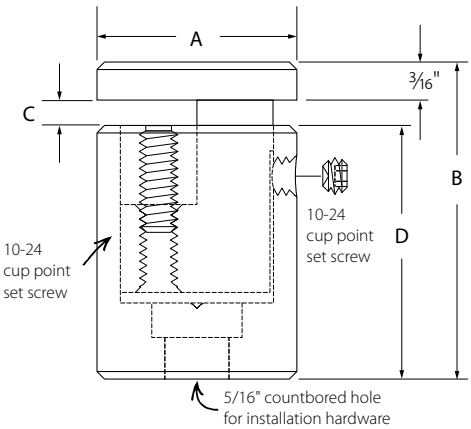

SO-APEG9
(For 1/8" to 1/2" material)



- Assembly hardware included**
- (1) Cup point socket set screw (HD-S1)
SO-APEG9 and SO-APEG75
 - (1) Nylon tip socket set screw (HD-NT25)
SO-APEG3
 - (1) Nylon tip socket set screw (HD-NT275)




- Tip**
- Installation hardware sold separately.
See Hardware section for available options

DOUBLE ADJUSTABLE EDGE GRIP

Aluminum

PART	DIA. (A)	HEIGHT (B)	HOLDS (C)	BARREL (D)
SO-ADPEG9	1"	1-5/8" to 2"	1/8" to 1/2"	1-1/4"
SO-ADPEG3	1-1/4"	1-7/8" to 1-1/4"	1/8" to 1/2"	1-1/2"

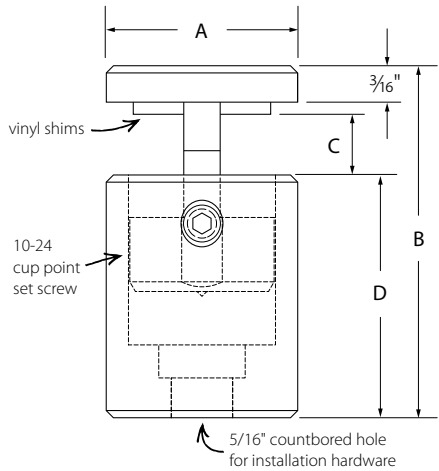

SO-ADPEG9
(For 1/8" to 1/2" material)



- Assembly hardware included**
- (1) Cup point socket set screw (HD-S1)
SO-ADPEG9
 - (2) Panel clip shims (HD-VS-100)
SO-ADPEG9
 - (2) Panel clip shims (HD-VS-125)



- Tip**
- Installation hardware sold separately.
See Hardware section for available options

CUSTOM VARIABLE DEPTH STANDOFF SOLUTION

Call for assistance with selecting the correct parts for your installation



- Tip**
- Combine a cup-style base with a standard
standoff barrel and cap to create a custom
Variable Depth Standoff solution
 - These assemblies are ideal for mounting standoffs
to uneven surfaces
 - Call for assistance with selecting the correct parts
for your installation



1" base holds
3/4" Standard Barrel,
pair with 1" dia. cap




1-1/4" base holds
1" Standard Barrel,
pair with 1-1/4" dia. cap



SQUARE ADJUSTABLE EDGE GRIP

Aluminum

PART	DIA. (A)	HEIGHT (B)	HOLDS (C)	BARREL (D)
SO-APEG-SQ9	1"	1-9/16" to 1-15/16"	1/8" to 1/2"	1-1/4"
SO-APEG-SQ3	1-1/4"	1-13/16" to 2-17/16"	1/8" to 3/4"	1-1/2"

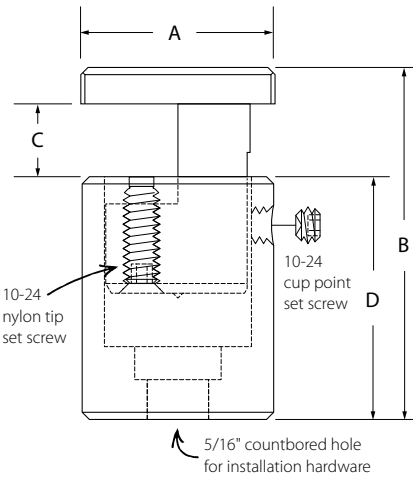

SO-APEG-SQ9
(For 1/8" to 1/2" material)



- Assembly hardware included**
- (1) Cup point socket set screw (HD-S1)
SO-APEG-SQ9
 - (1) Nylon tip socket set screw (HD-NT25)
SO-APEG-SQ3
 - (1) Nylon tip socket set screw (HD-NT275)




- Tip**
- Installation hardware sold separately.
See Hardware section for available options



PANEL HINGE

Aluminum

PART	DIA. (A)	LENGTH (B)	HOLE TO C OF HINGE (C)	THICKNESS
SO-A1H	1"	2-11/16"	13/16"	5/16"
SO-A125H	1-1/4"	3-7/8"	1-5/16"	3/8"

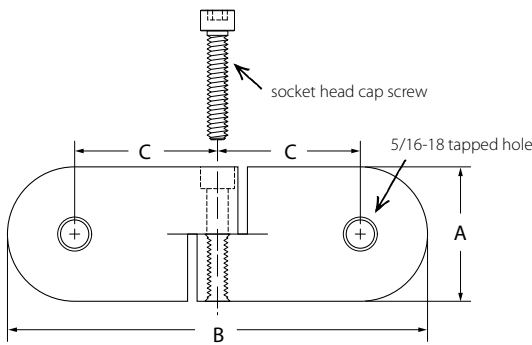


- Assembly hardware included
- SO-A1H
 - (1) Socket head cap screw (HD-STC1)
 - SO-A125H
 - (1) Socket head cap screw (HD-STC5)

PANEL HINGE WITH EDGE GRIPS

AND DISC CAPS

Aluminum

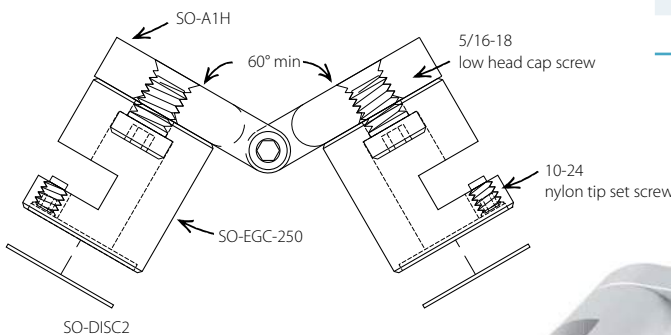

Includes Finishing Discs, SO-DISC2. See page SO:13

PART	HINGE SIZE	HOLDS	CAP STYLE
SO-A1H-EGC-125	1"	1/8"	brushed disc
SO-A1H-EGC-250	1"	1/4"	brushed disc
SO-A1H-EGC-375	1"	3/8"	brushed disc
SO-A1H-EGC-500	1"	1/2"	brushed disc

- Assembly hardware included
- (2) Adhesive finishing disc (SO-DISC2)
 - (2) Nylon tip socket set screw (HD-NT1)
 - (2) Low head socket cap screw (HD-LHD7)
 - (1) Socket head cap screw (HD-STC1)


Note

- For detailed edge grip drawing, see page SO:16

PANEL HINGE WITH CAPS

Aluminum

PART	DIA.	CAP HEIGHT	CAP STYLE
SO-A1H-CAP9	1"	3/8"	round cap
SO-A125H-CAP3	1-1/4"	1/2"	round cap

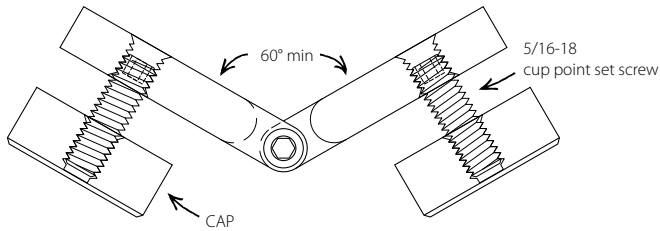


- Assembly hardware included
- (2) Threaded stud up to 1-1/2" long. Specify stud or material thickness. See page HD:20
 - SO-A1H-CAP9
 - (1) Socket head cap screw (HD-STC1)
 - SO-A125H-CAP3
 - (1) Socket head cap screw (HD-STC5)

PANEL HINGE WITH EDGE GRIPS

AND THREADED CAPS

Aluminum

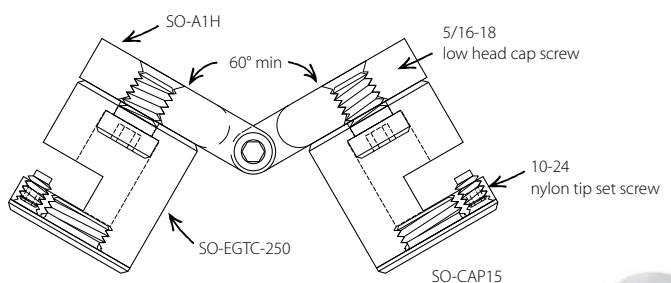

Includes Finishing Caps, SO-CAP15. See page SO:5

PART	HINGE SIZE	HOLDS	CAP STYLE
SO-A1H-EGTC250-15	1"	1/4"	threaded cap
SO-A1H-EGTC375-15	1"	3/8"	threaded cap

- Assembly hardware included
- (2) Threaded finishing caps (SO-CAP15)
 - (2) Nylon tip socket set screw (HD-NT1)
 - (2) Low head socket cap screw (HD-LHD7)
 - (1) Socket head cap screw (HD-STC1)

Note

- For detailed edge grip drawing, see page SO:17



STANDOFF KITS

Standoff Kits come in a variety of diameters and lengths with everything you need to get started on your project including a set of four (4) standoffs with assembly and installation hardware and instructions. All kit components are also available for purchase individually.



3/8" DIAMETER KITS

Aluminum



	PART	DIA.	BARREL LENGTH	HOLDS
●	SOK-7-050	3/8"	1/2"	1/8" to 1/2"

- ⚙ Custom finishes available
- Available in black anodize
- Additional cost and lead time may apply

5/8" DIAMETER KITS

Aluminum



	PART	DIA.	BARREL LENGTH	HOLDS
●	SOK-8-500	5/8"	1/2"	1/4" to 3/8"
●	SOK-8-750	5/8"	3/4"	up to 1/2"
●	SOK-8-100	5/8"	1"	up to 1/2"

- ⚙ Custom finishes available
- Available in brass anodize
- Available in black anodize
- Available in polished chrome plate
- Additional cost and lead time may apply

3/4" DIAMETER KITS

Aluminum



	PART	DIA.	BARREL LENGTH	HOLDS
	SOK-75-075	3/4"	3/4"	up to 1/2"
	SOK-75-100	3/4"	1"	up to 1/2"
	SOK-75-125	3/4"	1-1/4"	up to 1/2"

1" DIAMETER KITS

Aluminum



	PART	DIA.	BARREL LENGTH	HOLDS
●	SOK-9-050	1"	1/2"	1/4" or 3/8"
●	SOK-9-100	1"	1"	up to 1/2"
●	SOK-9-150	1"	1-1/2"	up to 1/2"
●	SOK-9-200	1"	2"	up to 3/4"

- ⚙ Custom finishes available
- Available in brass anodize
- Available in black anodize
- Available in polished chrome plate
- Additional cost and lead time may apply

1-1/4" DIAMETER KITS

Aluminum



	PART	DIA.	BARREL LENGTH	HOLDS
	SOK-3-1	1-1/4"	1"	up to 1/2"
	SOK-3-2	1-1/4"	2"	up to 3/4"

1-1/2" DIAMETER KITS

Aluminum



	PART	DIA.	BARREL LENGTH	HOLDS
	SOK-10-151	1-1/2"	1"	up to 1/2"
	SOK-10-152	1-1/2"	2"	up to 3/4"

STAINLESS STEEL KITS

316 Stainless Steel



	PART	DIA.	BARREL LENGTH	HOLDS
	SOK-SS50-1500	1/2"	1/2"	1/8" or 1/4"
	SOK-SS100-3100	1"	1"	up to 1/2"

EDGE GRIP KITS

Aluminum



	PART	DIA.	HOLDS
	SOK-PEG75	3/4"	1/8" to 1/4"
	SOK-PEG9	1"	1/8" to 1/2"
	SOK-PEG3	1-1/4"	1/8" to 3/4"


PANEL CLIP KITS

Aluminum















	PART	DIA.	HOLDS
	SOK-PC-100	1"	1/8" to 1/4"
	SOK-PC-125	1-1/4"	1/8" to 1/4"

STANDOFFS INDEX

		 SO:4	 SO:4		
 SO:5	 SO:5	 SO:5	 SO:5		
 SO:5	 SO:6	 SO:6	 SO:6	 SO:7	 SO:7
 SO:7	 SO:8	 SO:9	 SO:10	 SO:10	 SO:11
 SO:11	 SO:11	 SO:12	 SO:13	 SO:13	 SO:14
1 Standard Cap SO:4 SO-CAP25, SO-CAP7, SO-CAP8, SO-CAP8CU, SO-CAP75, SO-CAP9, SO-CAP9CU, SO-CAP3, SO-CAP10, SO-CAP22R 2 Stainless Steel Cap SO:4 SO-SSCAP50, SO-SSCAP75, SO-SSCAP100, SO-SSCAP125 3 Low Profile Cap SO:5 SO-CAP11, SO-CAP12, SO-CAP13, SO-CAP23, SO-CAP14 4 Low Profile Cap with Integrated Stud SO:5 SO-CAP17, SO-CAP18, SO-CAP19 5 Finishing Cap with Integrated Stud SO:5 SO-CAP15, SO-CAP16, SO-CAP26 6 Security Cap with Integrated stud SO:6 SO-SCB, SO-SCB1, SO-SCB2 7 Security Cap SO:6 SO-SC9, SO-SC3, SO-SC10 8 Stainless Steel Security Cap with Stem SO:6 SO-SSCAP1R, SO-SSCAP2R, SO-SSCAP3, SO-SSCAP4 9 Extrusion Cap SO:7 SL-1.25PCAP, SL-2.SPCAP 10 Hex Cap SO:7 SO-HCAP1, SO-HCAP2 11 Square Cap SO:7 SO-CAP20 12 1/4" to 1" Diameter Standard Barrel SO:8 SO-2525, SO-025, SO-050, SO-010R, SO-500, SO-750, SO-100, SO-150, SO-200, SO-300, SO-BAR5, SO-BAR9, 1/4" to 1" Diameter Standard Barrel (cont.) SO:8 SO-BAR11, SO-75075, SO-75100, SO-75125, SO-9025, SO-9050, SO-9075, SO-9100, SO-9100CU, SO-9150, SO-9200, 1/4" to 1" Diameter Standard Barrel (cont.) SO:8 SO-9300, SO-9400, SO-9600		13 1-1/4" to 2" Diameter Standard Barrel SO:9 SO-250, SO-625, SO-1, SO-115, SO-2, SO-3, SO-3, SO-4, SO-6, SO-8, SO-10, SO-12, SO-1525, SO-1505, SO-151, 1-1/4" to 2" Diameter Standard Barrel (cont.) SO:9 SO-152, SO-153, SO-154, SO-201R, SO-202R, SO-203R, SO-204R, SO-206R 14 Stainless Steel Barrel SO:10 SO-SS1500, SO-SS1750, SO-SS2500, SO-SS2750, SO-SS2100, SO-SS3750, SO-SS3100, SO-SS4100, SO-SS4150 15 Square Barrel SO:10 SO-ASQ1, SO-ASQ2 16 LED Standoff Barrel SO:11 SO-9050-LED, SO-9100-LED, SO-9150-LED 17 LED Light Board SO:11 SO-LED-RED, SO-LED-WHITE, SO-LED-BLUE, SO-LED-GREEN 18 LED Power Supply SO:11 SO-LED-PS, SO-LED-HWPS 19 Standoff Hub SO:12 SO-04H-250R, SO-04H-375R, SO-14H-250R, SO-14H-375R, SO-14H-500R, SO-A24H-250, SO-A24H-375, SO-A24H-500 20 Panel Clip with Brushed Disc SO:13 SO-APC-100, SO-APC-125 21 Adhesive Finishing Disc for Panel Clips SO:13 SO-DISC1, SO-DISC2 22 Standoff Gripper SO:14 SO-AGR-250, SO-AGR-375, SO-AGR-500, SO-AGR-750			

STANDOFFS INDEX

 PRECISION DISPLAY COMPONENTS 					
 SO:15	 SO:15	 SO:16	 SO:17	 SO:18	 SO:18
		 SO:19	 SO:19		
 SO:21		 SO:21	 SO:22	 SO:23	 SO:23
 SO:21		 SO:21	 SO:22	 SO:23	 SO:23
 SO:21		 SO:21	 SO:22	 SO:23	 SO:23
 SO:21		 SO:21	 SO:22	 SO:23	 SO:23
 SO:21		 SO:21	 SO:22	 SO:23	 SO:23

WL-Rod & Wire

Wire & Rod Systems Introduction	WL:2
WL 3/64" Wire Surface Mounts	WL:4
WL 3/64" Wire Panel Grippers	WL:6
WL 3/64" Wire Swaged Wire Packs	WL:9
WL Surface Mounted Panel Grippers	WL:10
WL 1/4" Rod Surface Mounts	WL:12
WL 1/4" Rod Panel Grippers	WL:13
WL Wire Suspension Kits	WL:16
WL Individual & Replacement Parts	WL:17
WL Rod & Wire Index	WL:18



WL-Rod & Wire is an sleek suspension system designed around 3/64" stainless steel wire and 1/4" aluminum rod. These components are best for suspending lightweight applications up to 15 lbs from any flat or angled surface.

		WL ROD & WIRE		WS WIRE SUSPENSION		EZ ROD & WIRE					
		3/64" wire	1/4" rod	3/64" wire			1/8" wire	1/4" rod	3/8" rod	5/8" rod	
Surface mounts 	Floor-to-ceiling	WL-A40	WL-A60	WS-A1B	WS-A27B		EZ-A27 or EZ-AH28PO	EZ-APCA	EZ-A29	EZ-A31	EZ-A2.5WMBL
	Wall Mounted (angled)	WL-A41	WL-A61	WS-A1	WS-A27		EZ-A28	EZ-A53	EZ-A30	EZ-AH32	
		WL-A42		WS-A6B			EZ-A19 or EZ-AH20PO	EZ-A33-W125 or EZ-AH33-W125PO	EZ-A21	EZ-AH24	EZ-A36-R375
Wire/Rod Mounted Panel Grippers 	Vertical or horizontal Rotates to grip at any angle	WL-A45	WL-A62	WS-A3			EZ-A5	EZ-A58	EZ-A9	EZ-A13	EZ-A60
	Fixed Horizontal Holds panels (shelves) horizontally	WL-A46	WL-A63	WS-A4			EZ-A6	EZ-A59	EZ-A10	EZ-A14	
				WS-AHEG			EZ-AHGC				
	Fixed Vertical Holds panels vertically			WS-AWSC	vert. or horiz.		EZ-AVGC				
				WS-AEVDG			EZ-AVDG				
	Saddle gripper			WS-AESG			EZ-A8			EZ-A16	EZ-A62
	Connector with cap	WL-A47		WS-A23		WS-A14	EZ-A50		EZ-A12	EZ-A56	EZ-A57
Vertical panel gripper	WL-A44	WL-A64	WS-A17		WS-AEPG	EZ-A43 or EZ-AH43PO		EZ-A55R	EZ-A52 or EZ-AH52		
Extrusion Mounted Components 				WS-A11B	WS-A26B						
Shelving Components 	Spreader bar			WS-A11	WS-A26		EZ-A63,64,65				
	Shelf hub			WS-A25			EZ-A40				
	Panel connector						EZ-A44				
	Turnnbuckle (tensioning)				WS-A16			EZ-AH45PO			
	Pulley wheel			WS-A10	WS-ABRKA			EZ-APW			

**WL | Rod & Wire**

**WS | Wire Suspension**

**EZ | Rod & Wire**

Light-weight system not to exceed 15 pounds*

Medium-weight system not to exceed 50 pounds*

Heavier-weight system not to exceed 200 pounds*

Consult a Gyford Standoff Systems Client Solution Specialist with the specifics of your installation for assistance with selecting the proper components.


*Safe working loads must be taken into consideration in order to determine the structural integrity of the mounting surface, anchors and materials that are being suspended. Standoff Systems components are not structurally rated.

- **WL | Rod & Wire***Light-weight system not to exceed 15 pounds**
- **WS | Wire Suspension***Medium-weight system not to exceed 50 pounds**
- **EZ | Rod & Wire***Heavier-weight system not to exceed 200 pounds**

Consult a Gyford Standoff Systems Client Solution Specialist with the specifics of your installation for assistance with selecting the proper components.

*Safe working loads must be taken into consideration in order to determine the structural integrity of the mounting surface, anchors and materials that are being suspended. Standoff Systems components are not structurally rated.

WL 3/64" WIRE
TOP MOUNT TURNBUCKLE
Aluminum

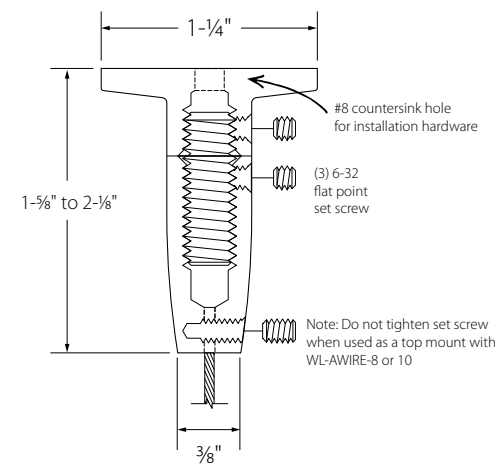


WL-A40
(Top mount)

PART	CONNECTION	WIRE LENGTH
WL-A40	top and/or bottom mount	up to 8'

- Installation hardware included**
 - (1) All purpose wall anchor (HD-FDA1)
 - (1) Oval head screw (HD-PS2)
- Assembly hardware included**
 - (1) Cup point socket set screw (HD-S19)
 - (1) Flat point socket set screw (HD-FPT8)
 - (2) Flat point socket set screw (HD-FPT7)
- Tip**
 - Use 3/64" wire with swaged ball (WL-AWIRE8). See page WL:9
- Note**
 - Do not tighten set screw when used as a top mount with WL-AWIRE8

WL 3/64" WIRE
BOTTOM MOUNT TURNBUCKLE
Aluminum

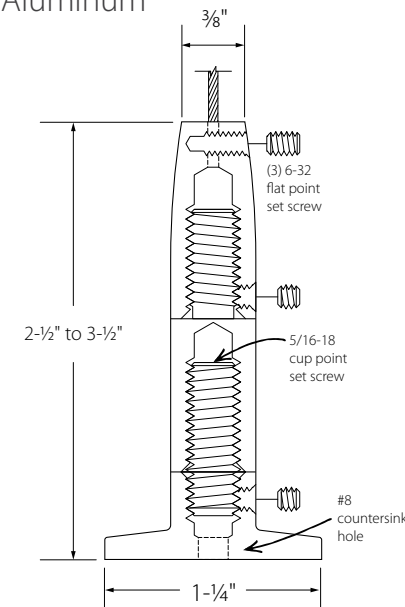


WL-A41
(Bottom mount)

PART	CONNECTION	WIRE LENGTH
WL-A41	bottom mount for larger spans	8' to 10'

- Installation hardware included**
 - (1) All purpose wall anchor (HD-FDA1)
 - (1) Oval head screw (HD-PS2)
- Assembly hardware included**
 - (1) Cup point socket set screw (HD-S19)
 - (1) Flat point socket set screw (HD-FPT8)
 - (2) Flat point Socket Set Screw (HD-FPT7)
- Tip**
 - Use 3/64" wire with swaged ball (WL-AWIRE10). See page WL:9
- Note**
 - Turnbuckle body provides additional tension capability without twisting wire

WL 3/64" WIRE
WALL MOUNT
Aluminum

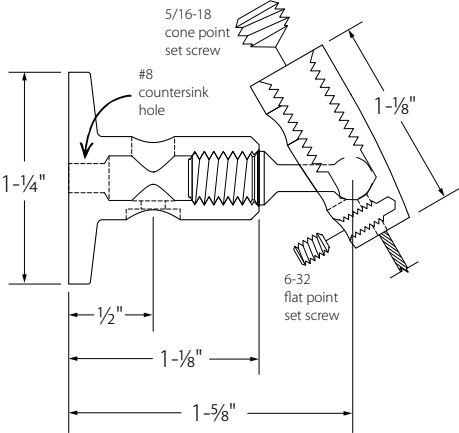


WL-A42
(Top & bottom mount)

PART	CONNECTION	WIRE LENGTH
WL-A42	top and/or bottom mount	up to 8'

- Installation hardware included**
 - (1) All purpose wall anchor (HD-FDA1)
 - (1) Oval head screw (HD-PS2)
- Assembly hardware included**
 - (1) Cone point socket set screw (HD-CP9)
 - (1) Flat point socket set screw (HD-FPT8)
- Tip**
 - Use 3/64" wire with swaged ball (WL-AWIRE8). See page WL:9
- Note**
 - Installation requires 2" long shank phillips insert bit (HD-PD2), sold separately. See page HD:14



WL 3/64" WIRE DOUBLE
WALL MOUNT
Aluminum

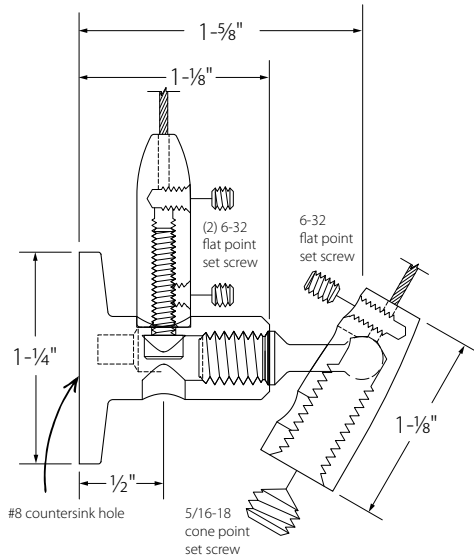

WL-A43
(Bottom mount)


PART	CONNECTION	WIRE LENGTH
WL-A43	bottom mount for larger spans	up to 8'

- Installation hardware included**
 - (1) All purpose wall anchor (HD-FDA1)
 - (1) Oval head screw (HD-PS2)
- Assembly hardware included**
 - (1) Cone point socket set screw (HD-CP9)
 - (1) Flat point socket set screw (HD-FPT8)
 - (2) Flat point Socket Set Screw (HD-FPT7)
 - (1) Socket Head Cap Screw (HD-STC001)
- Tip**
 - Use 3/64" wire with swaged ball (WL-AWIRE8). See page WL:9
- Note**
 - Installation requires 2" long shank phillips insert bit (HD-PD2), sold separately. See page HD:14

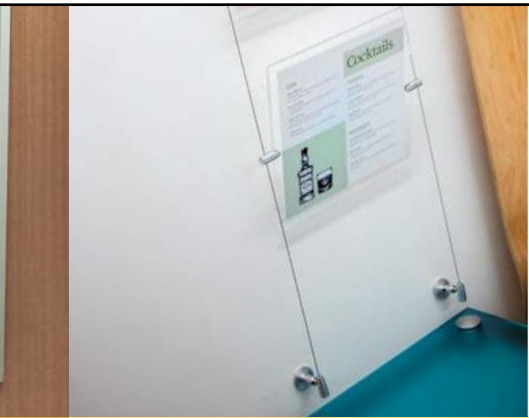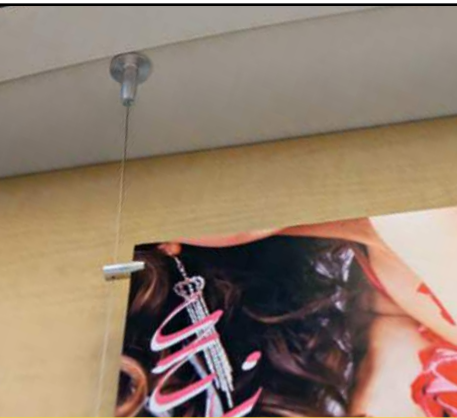

WL 3/64" WIRE
SINGLE GRIPPER
Aluminum

PART	HOLDS	SLOT WIDTH (A)	DIA. (B)	DEPTH (C)
WL-A45-188	3/16"	.218"	1/2"	1/4"
WL-A45-250	1/4"	.265"	9/16"	1/4"
WL-A45-375	3/8"	.390"	5/8"	3/16"

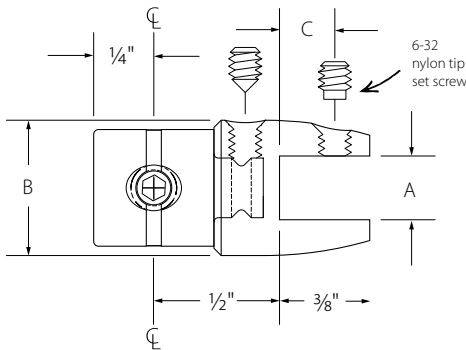

- Assembly hardware included
- (1) Flat point socket set screw (HD-FPT2)
 - (1) Nylon tip socket set screw (HD-NT0)
- WL-A45-188
- (1) Cone point socket set screw (HD-CP1)
- WL-A45-250, WL-A45-375
- (1) Cone point socket set screw (HD-CP2)
- Note
- Grippers rotate and can be fixed at any angle.



WL-A45-188
(For 3/16" material)




WL-A45-250
(For 1/4" material)



WL-A45-375
(For 3/8" material)

WL 3/64" WIRE
DOUBLE GRIPPER
Aluminum

PART	HOLDS	SLOT WIDTH (A)	DIA. (B)	DEPTH (C)
WL-A46-188	3/16"	.218"	1/2"	1/4"
WL-A46-250	1/4"	.265"	9/16"	1/4"
WL-A46-375	3/8"	.390"	5/8"	3/16"

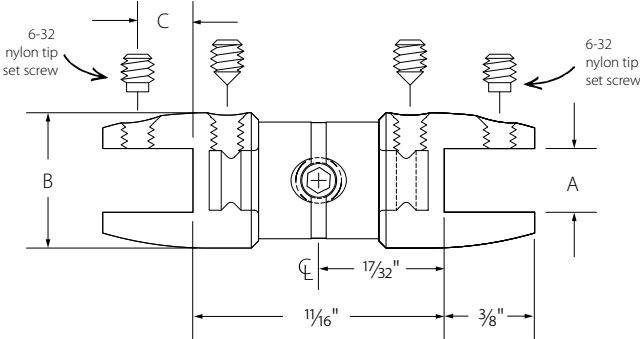

- Assembly hardware included
- (1) Flat point socket set screw (HD-FPT2)
 - (2) Nylon tip socket set screw (HD-NT0)
- WL-A46-188
- (2) Cone point socket set screw (HD-CP1)
- WL-A46-250, WL-A46-375
- (2) Cone point socket set screw (HD-CP2)
- Note
- Grippers rotate and can be fixed at any angle.



WL-A46-188
(For 3/16" material)



WL-A46-250
(For 1/4" material)



WL-A46-375
(For 3/8" material)




How-to Videos
www.standoffsystems.com/howto

Visit our library of "how-to" videos on our website. Our Tech Lead will walk you through installing Gyford Standoff Systems parts and hardware.



Inspirational Photo Galleries
www.standoffsystems.com/photo-gallery


- Signage/Awards
- Interior Design/Construction
- Shelving/Displays
- Art/Framing
- Retail/POP
- Exhibits/Museums

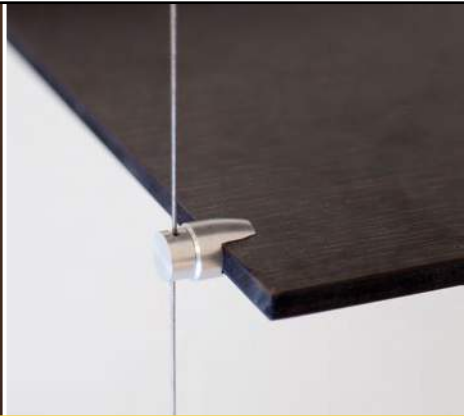

WL 3/64" WIRE
VERTICAL GRIPPER
Aluminum

PART	HOLDS	SLOT WIDTH (A)	DIA. (B)	DEPTH (C)
WL-A44-188	3/16"	.218"	1/2"	1/4"
WL-A44-250	1/4"	.265"	9/16"	1/4"
WL-A44-375	3/8"	.390"	5/8"	3/16"


-  **Assembly hardware included**
 - (1) Flat point socket set screw (HD-FPT8) WL-A44-188
 - (1) Cone point socket set screw (HD-CP1)
 - (1) Nylon tip socket set screw (HD-NT0) WL-A44-250, WL-A44-375
 - (2) Cone point socket set screw (HD-CP2)
-  **Notes**
 - Grippers rotate and can be fixed at any angle
 - Cone point set screw may require material to be lightly dimpled with the tip of a drill bit

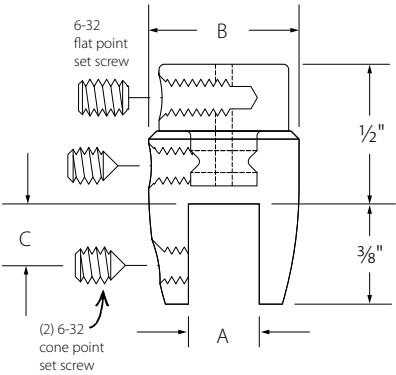

WL 3/64" WIRE
CONNECTOR WITH CAP
Aluminum

PART	CAP THREAD SIZE	CAP HEIGHT	WIRE SIZE	DIA.
WL-A47	10-24	3/16"	3/64"	1/2"

-  **Assembly hardware included**
 - (1) Flat point socket set screw (HD-FPT8)
 - (1) Threaded stud up to 1-1/2" long. Specify stud or material thickness. [See page HD:2](#)
-  **Tip**
 - Slide onto wire before installation into bottom attachment when terminating both ends of wire
-  **Notes**
 - Minimum 1/8" material thickness

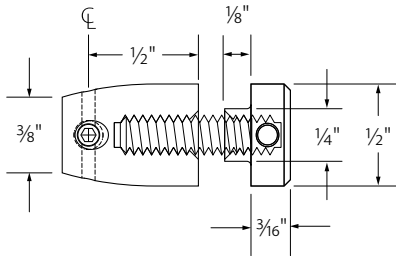

WL 3/64" WIRE WITH
1 BALL SWAGED END
Stainless Steel

PART	WIRE SIZE	LENGTH	INCLUDES
WL-AWIRE8	3/64" wire	8' 6"	8' 6" WS-Wire with one ball swaged end
WL-AWIRE10	3/64" wire	10' 6"	10' 6" WS-Wire with one ball swaged end

-  **Note**
 - Cut to desired length at time of installation
-  **Tip**
 - Use a wire bypass cutter to cut wire without fraying. [See page HD:16](#)



How-to Videos
www.standoffsystems.com/howto

Visit our library of "how-to" videos on our website. Our Tech Lead will walk you through installing Gyford Standoff Systems parts and hardware.



WL PANEL GRIPPER
WITH BASE PLATE
Aluminum

PART	HOLDS	SLOT WIDTH (A)	DIA. (B)	DEPTH (C)
WL-AUBC-188	3/16"	.218"	1/2"	1/4"
WL-AUBC-250	1/4"	.265"	9/16"	1/4"
WL-AUBC-375	3/8"	.390"	5/8"	3/16"


- **Installation hardware included**
 - (1) All purpose wall anchor (HD-FDA1)
 - (1) Oval head screw (HD-PS2)
- **Assembly hardware included**
 - (1) Flat point socket set screw (HD-FPT7)
 - (1) Nylon tip socket set screw (HD-NT0)

WL-AUBC-188

 - (1) Cone point socket set screw (HD-CP1)

WL-AUBC-250, WL-AUBC-375

 - (1) Cone point socket set screw (HD-CP2)
- **Note**
 - Grippers rotate and can be fixed at any angle

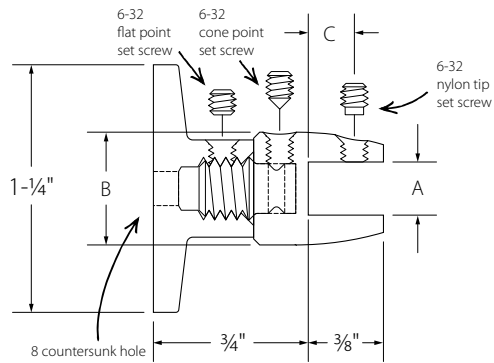

WL-AUBC-188
(For 3/16" material)



WL-AUBC-250
(For 1/4" material)



WL-AUBC-375
(For 3/8" material)



WL ANGLED PANEL GRIPPER
WITH BASE PLATE
Aluminum

PART	HOLDS	SLOT WIDTH (A)
WL-AACM-188	3/16"	.218"
WL-AACM-250	1/4"	.265"
WL-AACM-375	3/8"	.390"


- **Installation hardware included**
 - (1) All purpose wall anchor (HD-FDA1)
 - (1) Oval head screw (HD-PS2)
- **Assembly hardware included**
 - (1) Cup point socket set screw (HD-S14)
 - (1) Nylon tip socket set screw (HD-NT0)

WL-AACM-188

 - (1) Cone point socket set screw (HD-CP1)

WL-AACM-250, WL-AACM-375

 - (1) Cone point socket set screw (HD-CP2)
- **Tip**
 - Slide grippers onto rod before final installation attachment
- **Note**
 - Grippers rotate and can be fixed at any angle

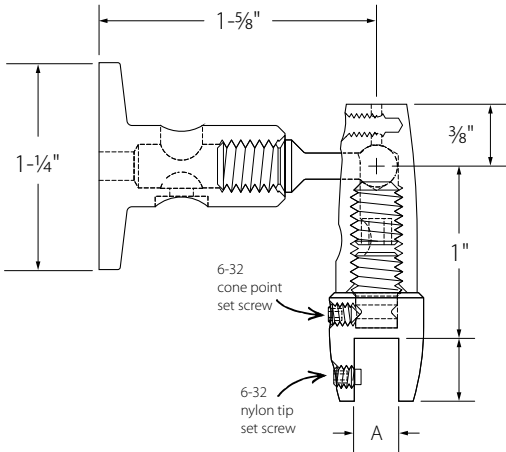

WL-AACM-188
(For 3/16" material)




WL-AACM-250
(For 1/4" material)



WL-AACM-375
(For 3/8" material)



WL 1/4" ROD UNIVERSAL
TOP MOUNT
Aluminum

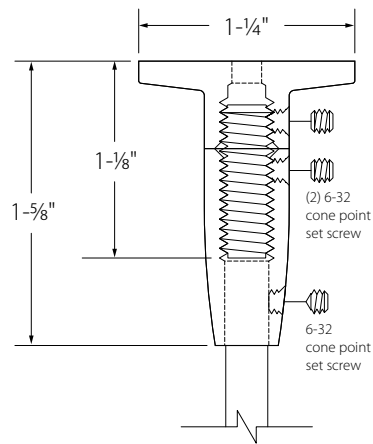


PART	CONNECTION	ROD DIAMETER	ROD LENGTH
WL-A60	top and/or bottom mount	1/4"	sold per foot



WL-A60
(Top & bottom mount)

- Installation hardware included**
- (1) All-purpose wall anchor (HD-FDA1)
 - (1) Oval head screw (HD-PS2)
- Assembly hardware included**
- (1) Cone point socket set screw (HD-CP1)
 - (2) Flat point socket set screw (HD-FPT7)
 - (1) Cup point socket set screw (HD-S19)
- Note**
- The WL-A60 top mount provides attachment only (no tension)
 - 1/4" Aluminum rod is flexible and intended to span short distances

WL 1/4" ROD UNIVERSAL
BOTTOM MOUNT
Aluminum

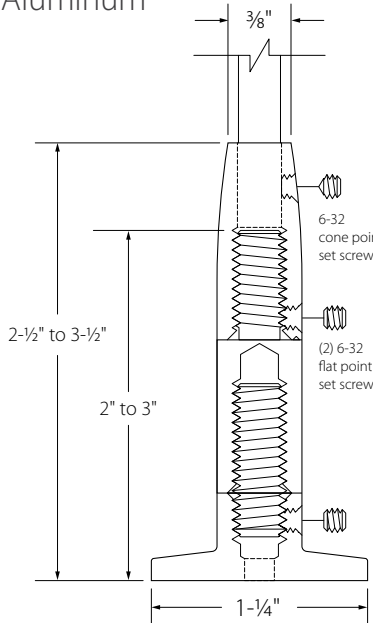


PART	CONNECTION	ROD DIAMETER	ROD LENGTH
WL-A61	bottom mount for adjustment	1/4"	sold per foot



WL-A61
(Bottom mount)

- Installation hardware included**
- (1) All-purpose wall anchor (HD-FDA1)
 - (1) Oval head screw (HD-PS2)
- Assembly hardware included**
- (1) Cone point socket set screw (HD-CP1)
 - (2) Flat point socket set screw (HD-FPT7)
 - (1) Cup point socket set screw (HD-S19)
- Note**
- The WL-A61 bottom mount provides minimal rod tension
 - 1/4" Aluminum rod is flexible and intended to span short distances

WL 1/4" ROD
PANEL GRIPPER
Aluminum

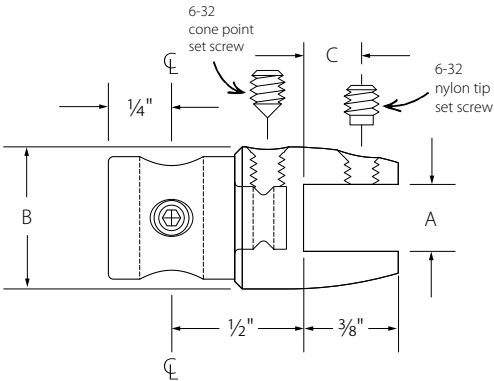

WL-A62-188
(For 3/16" material)



WL-A62-250
(For 1/4" material)



WL-A62-375
(For 3/8" material)

PART	HOLDS	SLOT WIDTH (A)	DIA. (B)	DEPTH (C)
WL-A62-188	3/16"	.218"	1/2"	1/4"
WL-A62-250	1/4"	.265"	9/16"	1/4"
WL-A62-375	3/8"	.390"	5/8"	3/16"

- Assembly hardware included**
- WL-A62-188
- (1) Nylon tip socket set screw (HD-NT0)
 - (2) Cone point socket set screw (HD-CP1)
- WL-A62-250 and WL-A62-375
- (1) Nylon tip socket set screw (HD-NT0)
 - (1) Cone point socket set screw (HD-CP1)
 - (1) Cone point socket set screw (HD-CP2)
- Tip**
- Slide grippers onto rod before final installation attachment
- Note**
- Grippers rotate and can be fixed at any angle

1/4" DIAMETER ROD
Aluminum



PART	DIA.	LENGTH
EZ-ROD250	1/4"	8' or 12'

- Note**
- Custom lengths available. Additional packaging and shipping costs may apply
 - 1/4" diameter rod is part of the EZ line, which also includes 3/8" and 5/8" diameters. See page EZ:30



WL 1/4" ROD DOUBLE
PANEL GRIPPER
Aluminum

PART	HOLDS	SLOT WIDTH (A)	DIA. (B)	DEPTH (C)
WL-A63-188	3/16"	.218"	1/2"	1/4"
WL-A63-250	1/4"	.265"	9/16"	1/4"
WL-A63-375	3/8"	.390"	5/8"	3/16"


-  Assembly hardware included
- WL-A63-188

 - (2) Nylon tip socket set screw (HD-NT0)
 - (3) Cone point socket set screw (HD-CP1)
- WL-A63-250 and WL-A63-375

 - (2) Nylon tip socket set screw (HD-NT0)
 - (1) Cone point socket set screw (HD-CP1)
 - (2) Cone point socket set screw (HD-CP2)
-  Tip

 - Slide grippers onto rod before final installation attachment
-  Note

 - Grippers rotate and can be fixed at any angle

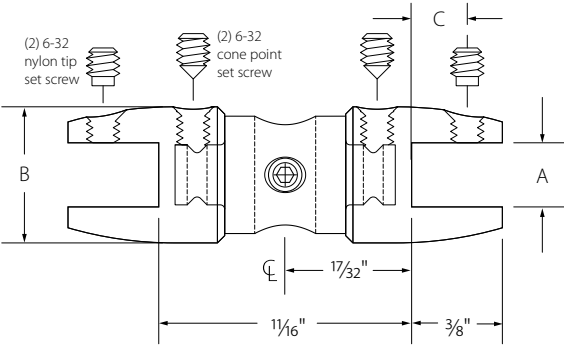

WL-A63-188
(For 3/16" material)



WL-A63-250
(For 1/4" material)



WL-A63-375
(For 3/8" material)

WL 1/4" ROD VERTICAL
PANEL GRIPPER
Aluminum


PART	HOLDS	SLOT WIDTH (A)	HEIGHT	ROD SIZE
WL-A64-188	3/16"	.218"	1-1/2"	1/4"
WL-A64-250	1/4"	.265"	1-1/2"	1/4"
WL-A64-375	3/8"	.390"	1-1/2"	1/4"

-  Assembly hardware included
- WL-A64-188

 - (1) Flat point socket set screw (HD-FPT7)
- WL-A64-250 and WL-A64-375

 - (2) Cone point socket set screw (HD-CP1)
 - (1) Cone point socket set screw (HD-CP2)
- WL-A64-250 and WL-A64-375

 - (1) Cone point socket set screw (HD-CP1)
 - (2) Cone point socket set screw (HD-CP2)

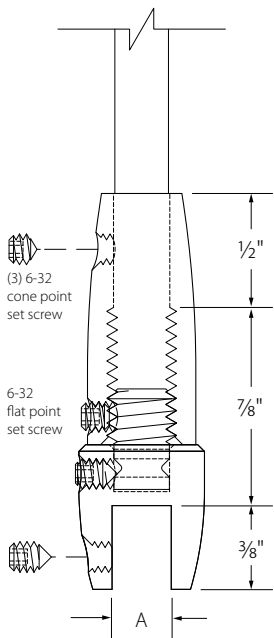



WL-A64-188
(For 3/16" material)



WL-A64-250
(For 1/4" material)




WL-A64-375
(For 3/8" material)

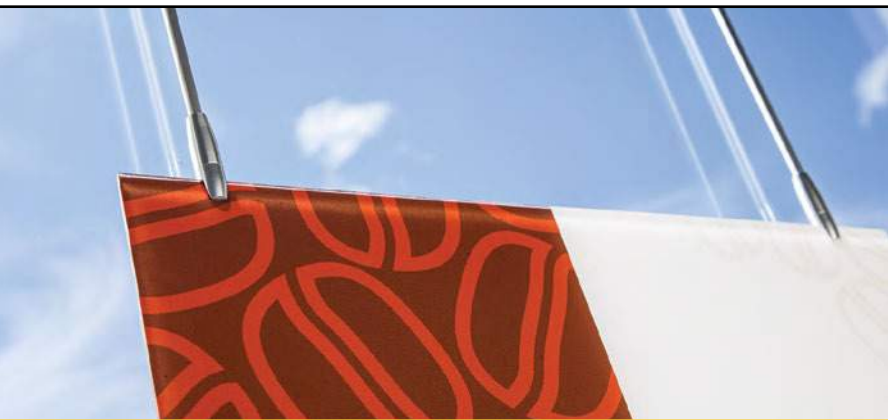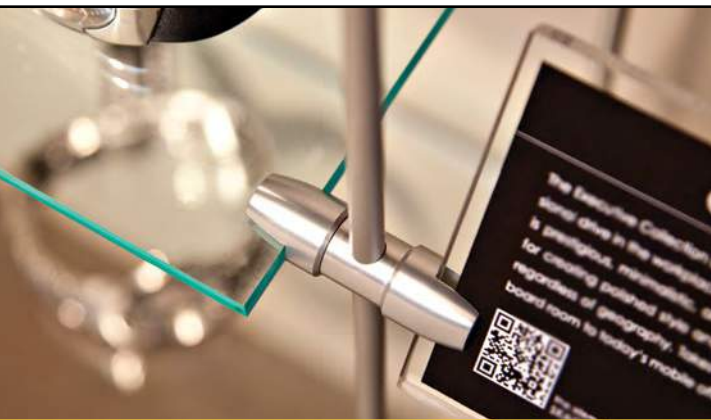

WL FLOOR TO CEILING MOUNTED
WIRE SUSPENSION SYSTEM

Aluminum

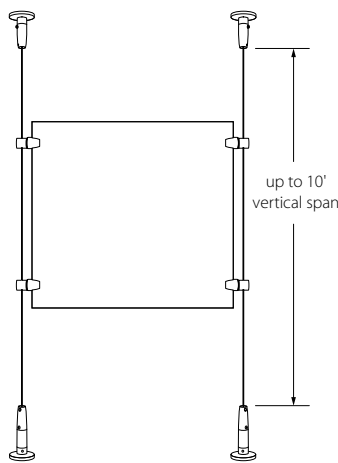

PART	WIRE SIZE	HOLDS
WLK-9	3/64"	3/16"
WLK-10	3/64"	1/4"




- Installation hardware included**
- (4) Oval head screw (HD-PS2)
 - (4) All purpose wall anchor (HD-FDA1)



- Assembly hardware included**
- (2) 10' 3/64" swaged wire lengths (WL-AWIRE10)
 - (2) WL Top Mounts (WL-A40)
 - (2) WL Bottom Mounts (WL-A41)
 - WLK-9
 - (4) WL Vertical Gripper (WL-A45-188)
 - WLK-10
 - (4) WL Vertical Gripper (WL-A45-250)

WL WIRE WALL MOUNTED
WIRE SUSPENSION SYSTEM

Aluminum

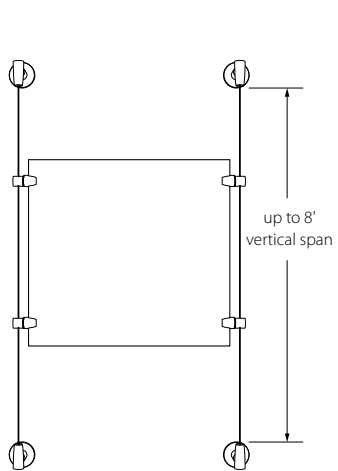

PART	WIRE SIZE	HOLDS
WLK-11	3/64"	3/16"
WLK-12	3/64"	1/4"



- Installation hardware included**
- (4) Oval head screw (HD-PS2)
 - (4) All purpose wall anchor (HD-FDA1)



- Assembly hardware included**
- (2) 8' 3/64" swaged wire lengths (WL-AWIRE8)
 - (4) WL Top or Bottom Mounts (WL-A42)
 - WLK-11
 - (4) WL Vertical Gripper (WL-A45-188)
 - WLK-12
 - (4) WL Vertical Gripper (WL-A45-250)

WL INDIVIDUAL AND REPLACEMENT PARTS

Visit our website for product specifications

BASE MOUNTS & CONNECTORS

-
- WL-AEBM
Extended Base Mount
-
- WL-AUBM
Universal Base Mount
-
- WL-CCP
Capstan Connection Pin
-
- WL-TBE
Turnbuckle Extension
-
- WL-BP
Ball Pin

ROD CONNECTORS

-
- WL-ASHRT
Single Rod Connector
-
- WL-ADHRT
Double Rod Connector

ROD TURNBUCKLES

-
- WL-ARHRT
Right Hand Rod Turnbuckle
-
- WL-ALHRT
Left Hand Rod Turnbuckle*

CAP

-
- WL-A500CAP
1/2" Diameter Cap

WIRE CONNECTORS

-
- WL-AVWT
Vertical Wire Connector
-
- WL-ASHWT
Single Wire Connector
-
- WL-ADHWT
Double Wire Connector
-
- WL-ATHWT
Threaded Wire Connector

GRIPPERS

-
- WL-A188C
3/16" Gripper
-
- WL-A250C
1/4" Gripper
-
- WL-A375C
3/8" Gripper

WIRE TURNBUCKLES

-
- WL-ARHWT
Right Hand Wire Turnbuckle
-
- WL-ALHWT
Left Hand Wire Turnbuckle
-
- WL-ABWT
Bullet Wire Turnbuckle
-
- WL-ASWT
Swivel Wire Turnbuckle

SPREADER BARS & CONNECTORS


-
- WL-AREWC
3/16" Rod Wire Connector
-
- WL-AREWPC
1/4" Rod Wire Position Connector




- Note**
- *Left hand threads are marked with a dimple on the turnbuckle body.



WL ROD & WIRE INDEX

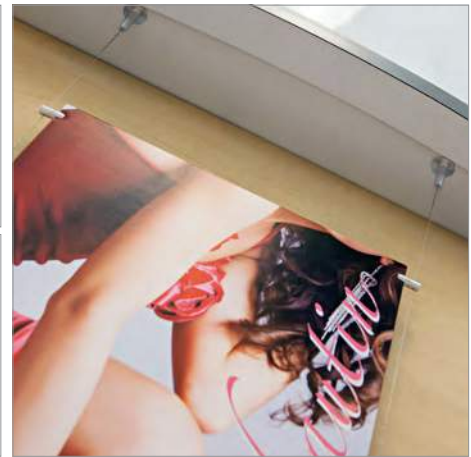		 WL:4	 WL:4		
 WL:5	 WL:5	 WL:3	 WL:3		
 WL:6	 WL:7	 WL:8	 WL:8	 WL:9	 WL:10
 WL:11	 WL:12	 WL:12	 WL:13	 WL:13	 WL:14
 WL:15	 WL:16	 WL:16	 WL:17	 WL:17	 WL:17
1 WL 3/64" Wire Top Mount Turnbuckle WL:4 WL-A40		12 WL 1/4" Rod Universal Top Mount WL:12 WL-A60		23 WL Tunbuckle Extension WL:17 WL-TBE	
2 WL 3/64" Wire Bottom Mount Turnbuckle WL:4 WL-A41		13 WL 1/4" Rod Universal Bottom Mount WL:12 WL-A61		24 WL Ball Pin WL:17 WL-BP	
3 WL 3/64" Wire Wall Mount WL:5 WL-A42		14 WL 1/4" Rod Panel Gripper WL:13 WL-A62-188, WL-A62-250, WL-A62-375		25 WL 1/2" Diameter Cap WL:17 WL-A500CAP	
4 WL 3/64" Wire Double Wall Mount WL:5 WL-A43		15 EZ 1/4" Diameter Rod WL:13 EZ-ROD250		26 WL Panel Gripper WL:17 WL-A188C, WL-A250C, WL-A375C	
5 WL 3/64" Wire Single Gripper WL:6 WL-A45-188, WL-A45-250, WL-A45-375		16 WL 1/4" Rod Double Panel Gripper WL:14 WL-A63-188, WL-A63-250, WL-A63-375		27 WL Rod End Wire Connector WL:17 WL-AREWC	
6 WL 3/64" Wire Double Gripper WL:7 WL-A46-188, WL-A46-250, WL-A46-375		17 WL 1/4" Rod Vertical Panel Gripper WL:15 WL-A64-188, WL-A64-250, WL-A64-375		28 WL Rod End Wire Position Connector WL:17 WL-AREWPC	
7 WL 3/64" Wire Vertical Gripper WL:8 WL-A44-188, WL-A44-250, WL-A44-375		18 WL Floor to Ceiling Mounted Wire Suspension System WL:16 WLK-9, WLK-10		29 WL 1/4" Rod Single Connector WL:17 WL-ASHRT	
8 WL 3/64" Wire Connector with Cap WL:8 WL-A47		19 WL Wall Mounted Wire Suspension System WL:16 WLK-11, WLK-12		30 WL 1/4" Rod Double Connector WL:17 WL-ADHRT	
9 WL 3/64" Wire with 1 Ball Swaged End WL:9 WL-AWIRE8, WL-AWIRE10		20 WL Extended Base Mount WL:17 WL-AEBM		31 WL 1/4" Rod Right Hand Turnbuckle Body WL:17 WL-ARHRT	
10 WL Panel Gripper with Base Plate WL:10 WL-AUBC-188, WL-AUBC-250, WL-AUBC-375		21 WL Universal Base Mount WL:17 WL-AUBM			
11 WL Angled Panel Gripper with Base Plate WL:11 WL-AACM-188, WL-AACM-250, WL-AACM-375		22 WL Capstan Connection Pin WL:17 WL-CCP			

WL ROD & WIRE INDEX

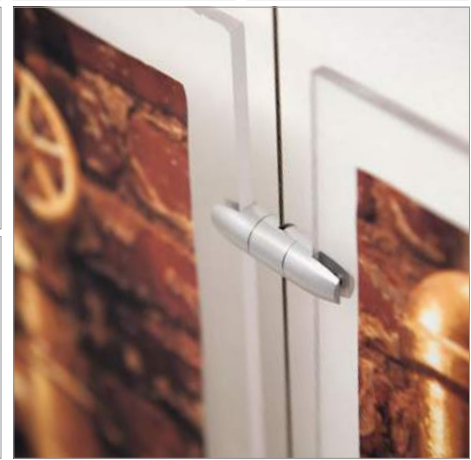		 WL:17	 WL:17		
 WL:17	 WL:17	 WL:17	 WL:17		
 WL:17	 WL:17	 WL:17	 WL:17	 WL:17	 WL:17
 WL:17	 WL:17			 WL:17	 WL:17
 WL:17	 WL:17			 WL:17	 WL:17
23 WL Tunbuckle Extension WL:17 WL-TBE		32 WL 1/4" Rod Left Hand Turnbuckle Body WL:17 WL-ALHRT			
24 WL Ball Pin WL:17 WL-BP		33 WL 3/64" Wire Vertical Connector WL:17 WL-AVWT			
25 WL 1/2" Diameter Cap WL:17 WL-A500CAP		34 WL 3/64" Wire Swivel Turnbuckle Body Assembly WL:17 WL-ASHWT			
26 WL Panel Gripper WL:17 WL-A188C, WL-A250C, WL-A375C		35 WL 3/64" Wire Double Horizontal Connector WL:17 WL-ADHWT			
27 WL Rod End Wire Connector WL:17 WL-AREWC		36 WL 3/64" Wire Threaded Connector WL:17 WL-ATHWT			
28 WL Rod End Wire Position Connector WL:17 WL-AREWPC		37 WL 3/64" Wire Right Hand Turnbuckle Body WL:17 WL-ARHWT			
29 WL 1/4" Rod Single Connector WL:17 WL-ASHRT		38 WL 3/64" Wire Left Hand Turnbuckle Body WL:17 WL-ALHWT			
30 WL 1/4" Rod Double Connector WL:17 WL-ADHRT		39 WL 3/64" Wire Bullet Turnbuckle WL:17 WL-ABWT			
31 WL 1/4" Rod Right Hand Turnbuckle Body WL:17 WL-ARHRT		40 WL 3/64" Wire Swivel Turnbuckle Body WL:17 WL-ASWT			

WL-Rod & Wire


Wire Suspension

WS 3/64" Wire Surface Mounts	WS:2
WS 3/64" Wire Panel Grippers	WS:5
WS 3/64" Wire Saddle Grippers	WS:9
WS 3/64" Wire Connector with Cap	WS:9
WS 3/64" Wire Shelving Components	WS:10
WS 3/64" Wire	WS:13
WS 3/64" Wire Extrusion Mounts	WS:14
WS Surface Mounted Panel Grippers	WS:16
WS Wire Suspension Kits	WS:20
WS Individual & Replacement Parts	WS:21
WS Wire Suspension Index	WS:22



This Wire Suspension line is designed to support applications up to 50 lbs. This product line uses 3/64" stainless steel wire to suspend, grip and mount materials from fixed or angled surfaces.

WS 3/64" WIRE TOP MOUNT WITH BASE PLATE
Aluminum

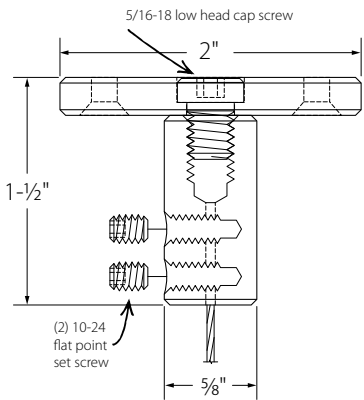

PART	CONNECTION	LENGTH	WIRE SIZE
WS-A1B	top mount	1-1/2"	3/64"




WS-A1B
(Top mount)

- Installation hardware included
 - (3) Oval head screw (HD-PS2)
- Assembly hardware included
 - (2) Flat point socket set screw (HD-FPT3)
 - (1) Low head socket cap screw (HD-LHD7)
- Tips
 - Wire needed will be about 3" shorter than the distance between the mounting surfaces.
 - You can also mount directly to aluminum extrusion using an extrusion nut. See page WS:14



WS 3/64" WIRE BOTTOM MOUNT WITH BASE PLATE
Aluminum

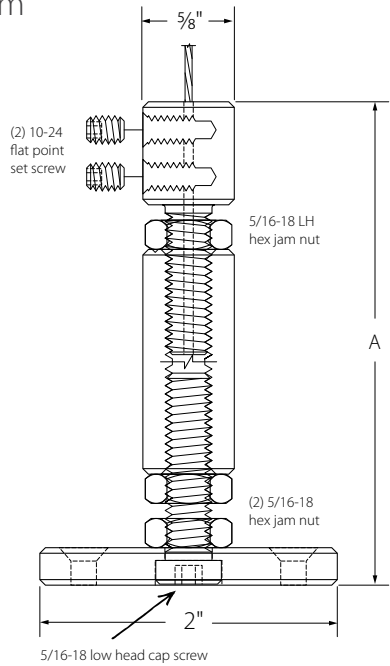

PART	CONNECTION	LENGTH (A)	WIRE SIZE
WS-A1	bottom mount	3-1/8" to 3-7/8"	3/64"




WS-A1
(Bottom mount)

- Installation hardware included
 - (3) Oval head screw (HD-PS2)
- Assembly hardware included
 - (2) Flat point socket set screw (HD-FPT3)
 - (1) Low head socket cap screw (HD-LHD11S)
 - (2) Hex jam nut (HD-HJN3)
 - (1) Hex jam nut with left-hand thread (HD-HJN4)
- Tips
 - Wire needed will be about 3" shorter than the distance between the mounting surfaces.
 - You can also mount directly to aluminum extrusion using an extrusion nut. See page WS:14



WS 3/64" WIRE TOP MOUNT WITH MOUNTING SCREW
Aluminum




PART	CONNECTION	LENGTH	WIRE SIZE
WS-A27B	top mount	1-1/4"	3/64"



WS-A27B
(Top mount)

- Installation hardware included
 - (1) Combination screw (HD-CBS1)
- Assembly hardware included
 - (2) Flat point socket set screw (HD-FPT3)

WS 3/64" WIRE BOTTOM MOUNT WITH MOUNTING SCREW
Aluminum

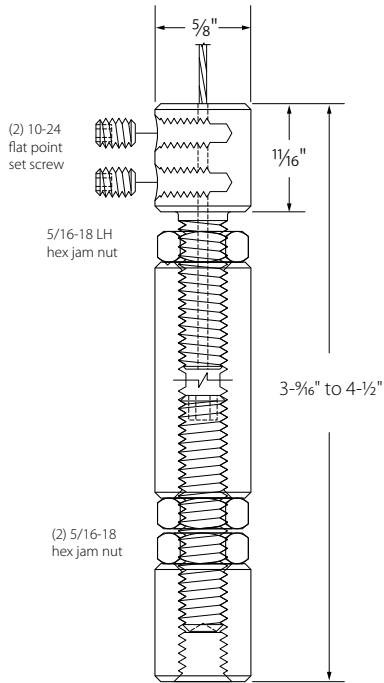


PART	CONNECTION	LENGTH	WIRE SIZE
WS-A27	bottom mount	3-9/16" to 4-1/2"	3/64"




WS-A27
(Bottom mount)

- Installation hardware included
 - (1) Combination screw (HD-CBS1)
- Assembly hardware included
 - (2) Flat point socket set screw (HD-FPT3)
 - (1) Hex jam nut with left-hand thread (HD-HJN4)
 - (2) Hex jam nut (HD-HJN3)
 - (1) Cup point socket set screw (HD-S22)

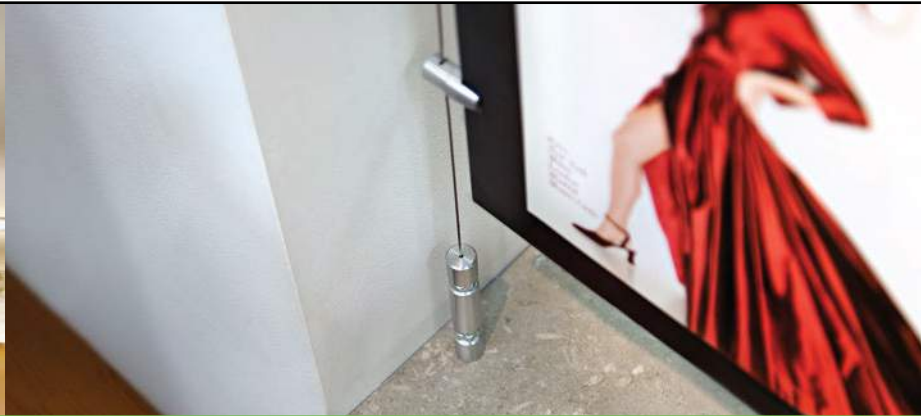

WS 3/64" WIRE HINGED TOP MOUNT WITH BASE PLATE
Aluminum

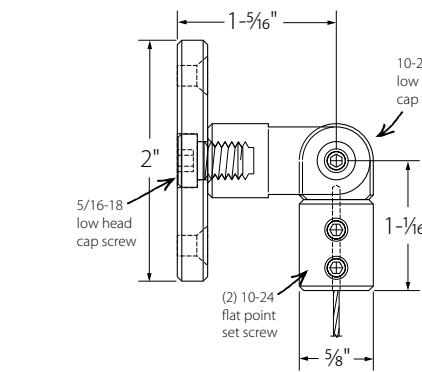


WS-A6B
(Top mount)



- Installation hardware included**
 - (3) Oval head screw (HD-PS2)
- Assembly hardware included**
 - (2) Flat point socket set screw (HD-FPT3)
 - (1) Low head socket cap screw (HD-LHD2)
 - (1) Low head socket cap screw (HD-LHD7)
- Tips**
 - Wire needed will be about 3" shorter than the distance between the mounting points
 - You can also mount directly to aluminum extrusion using an extrusion nut (WS-A26B). See page WS:15

PART	CONNECTION	LENGTH	WIRE SIZE
WS-A6B	top mount	1-1/16"	3/64"

WS 3/64" WIRE HINGED BOTTOM MOUNT WITH BASE PLATE
Aluminum

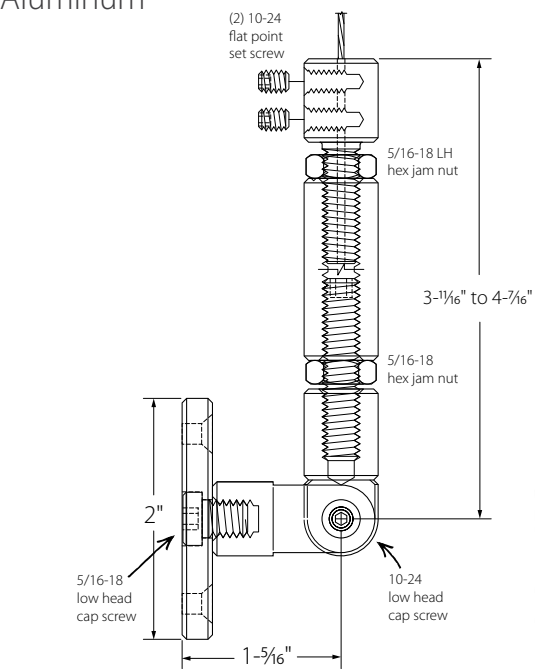


WS-A6
(Bottom mount)



- Installation hardware included**
 - (3) Oval head screw (HD-PS2)
- Assembly hardware included**
 - (2) Flat point socket set screw (HD-FPT3)
 - (1) Low head socket cap screw (HD-LHD2)
 - (1) Low head socket cap screw (HD-LHD7)
 - (1) Hex jam nut with left-hand thread (HD-HJN4)
 - (1) Hex jam nut (HD-HJN3)
 - (1) Cup point socket cap screw (HD-S22)
- Tips**
 - Wire needed will be about 3" shorter than the distance between the mounting points
 - You can also mount directly to aluminum extrusion using an extrusion nut (WS-A26). See page WS:15

WS 3/64" WIRE SINGLE GRIPPER
Aluminum

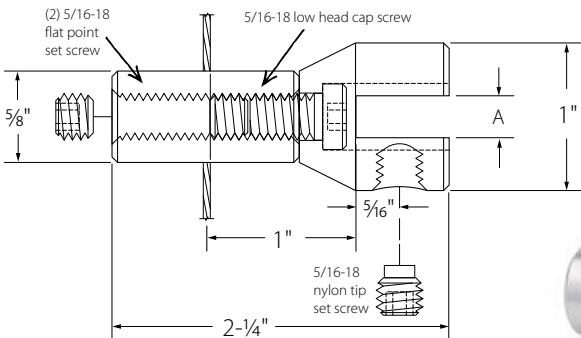


- Assembly hardware included**
 - (2) Flat point socket set screw (HD-FPT5)
 - (1) Low head socket cap screw (HD-LHD8)
- WS-A3-125**
 - (1) Nylon tip socket set screw (HD-NT8)
- WS-A3-250, WS-A3-375, WS-A3-500**
 - (1) Nylon tip socket set screw (HD-NT7)



- Tip**
 - Add a finishing cap (SO-CAP26) to create a finished end. See page SO:5

PART	HOLDS	SLOT WIDTH (A)	LENGTH	WIRE SIZE
WS-A3-125	1/8"	.155"	2-1/4"	3/64"
WS-A3-250	1/4"	.280"	2-1/4"	3/64"
WS-A3-375	3/8"	.405"	2-1/4"	3/64"
WS-A3-500	1/2"	.530"	2-1/4"	3/64"

WS 3/64" WIRE DOUBLE GRIPPER
Aluminum

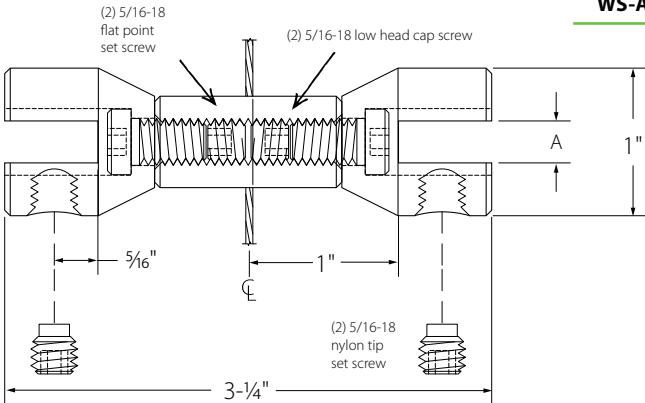


- Assembly hardware included**
 - (2) Flat point socket set screw (HD-FPT5)
 - (2) Low head socket cap screw (HD-LHD8)
- WS-A4-125**
 - (2) Nylon tip socket set screw (HD-NT8)
- WS-A4-250, WS-A4-375, WS-A4-500**
 - (2) Nylon tip socket set screw (HD-NT7)

PART	HOLDS	SLOT WIDTH (A)	LENGTH	WIRE SIZE
WS-A4-125	1/8"	.155"	3-1/4"	3/64"
WS-A4-250	1/4"	.280"	3-1/4"	3/64"
WS-A4-375	3/8"	.405"	3-1/4"	3/64"
WS-A4-500	1/2"	.530"	3-1/4"	3/64"



WS 3/64" WIRE ECONO
VERTICAL GRIPPER
Aluminum

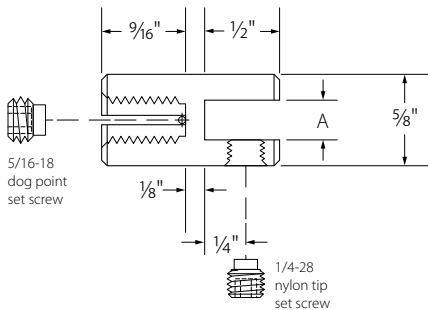

PART	HOLDS	SLOT WIDTH (A)	LENGTH	WIRE SIZE
WS-AEVG-125	1/8"	.185"	1-3/16"	3/64"
WS-AEVG-250	1/4"	.265"	1-3/16"	3/64"

**Assembly hardware included**

- (1) Nylon tip socket set screw (HD-NT6)
- (1) Dog point socket set screw (HD-DP2)

**Tip**


- Add a finishing cap (SO-CAP26) to create a finished end. [See page SO:5](#)







WS 3/64" WIRE ECONO
DOUBLE VERTICAL GRIPPER
Aluminum

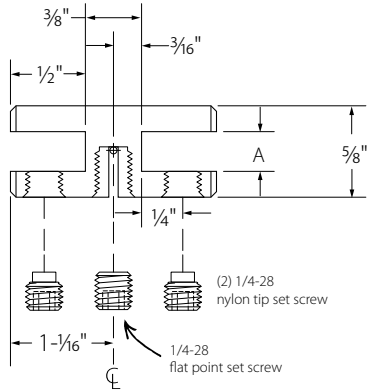

PART	HOLDS	SLOT WIDTH (A)	LENGTH	WIRE SIZE
WS-AEVDG-125	1/8"	.185"	1-3/8"	3/64"
WS-AEVDG-250	1/4"	.265"	1-3/8"	3/64"

**Assembly hardware included**

- (2) Nylon tip socket set screw (HD-NT6)
- (1) Flat point socket set screw (HD-FPT45)






WS-AEVDG-125
(For 1/8" material)

WS-AEVDG-250
(For 1/4" material)

WS 3/64" WIRE SHELF GRIPPER
Aluminum

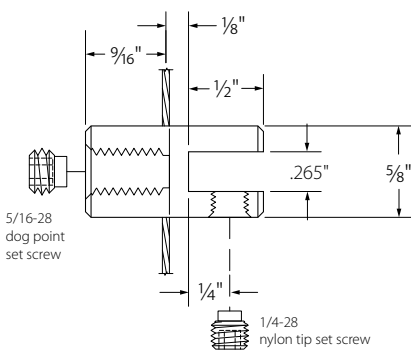

PART	HOLDS	SLOT WIDTH	LENGTH	WIRE SIZE
WS-AHEG-250	1/4"	.265"	1-3/16"	3/64"

**Assembly hardware included**

- (1) Nylon tip socket set screw (HD-NT6)
- (1) Dog point socket set screw (HD-DP2)

**Tip**


- Add a finishing cap (SO-CAP26) to create a finished end. [See page SO:5](#)







WS 3/64" WIRE SHELF OR
PANEL GRIPPER
Aluminum

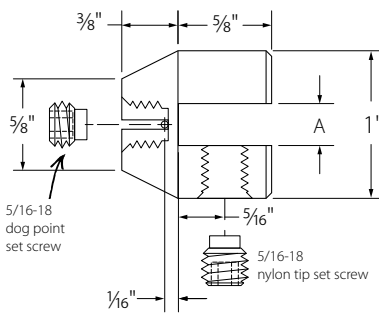

PART	HOLDS	SLOT WIDTH (A)	LENGTH	WIRE SIZE
WS-AWSC-250	1/4"	.280"	1"	3/64"
WS-AWSC-375	3/8"	.405"	1"	3/64"
WS-AWSC-500	1/2"	.530"	1"	3/64"

**Assembly hardware included**

- (1) Nylon tip socket set screw (HD-NT7)
- (1) Dog point socket set screw (HD-DP2)








WS-AWSC-250
(For 1/4" material)


WS-AWSC-375
(For 3/8" material)

WS-AWSC-500
(For 1/2" material)

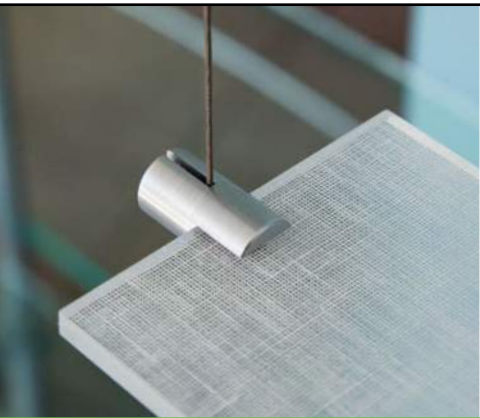

WS 3/64" WIRE
VERTICAL GRIPPER
Aluminum


PART	HOLDS	SLOT WIDTH (A)	LENGTH
WS-A17-125	1/8"	.155"	2-1/4"
WS-A17-250	1/4"	.280"	2-1/4"
WS-A17-375	3/8"	.405"	2-1/4"
WS-A17-500	1/2"	.530"	2-1/4"

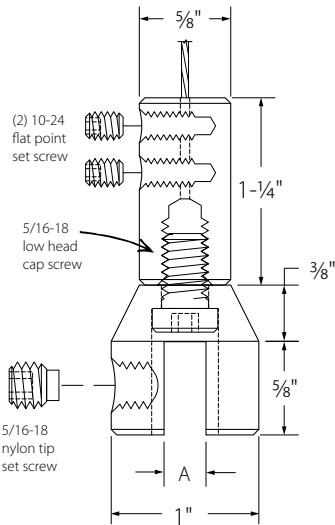

-  Assembly hardware included
- (2) Flat point socket set screw (HD-FPT3)
 - (1) Low head socket cap screw (HD-LHD8)
- WS-A17-125
- (1) Nylon tip socket set screw (HD-NT8)
- WS-A17-250, WS-A17-375, WS-A17-500
- (1) Nylon tip socket set screw (HD-NT7)

WS 3/64" WIRE SADDLE GRIPPER
Aluminum

PART	HOLDS	SLOT WIDTH (A)	LENGTH (B)	WIRE SIZE
WS-AESG-125	1/8"	.155"	7/8"	3/64"
WS-AESG-250	1/4"	.280"	1"	3/64"
WS-AESG-375	3/8"	.405"	1-1/8"	3/64"
WS-AESG-500	1/2"	.530"	1-1/4"	3/64"

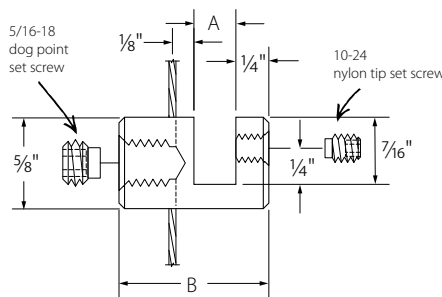

WS-AESG-125
(For 1/8" material)



WS-AESG-250
(For 1/4" material)



WS-AESG-375
(For 3/8" material)




WS-AESG-500
(For 1/2" material)

-  Assembly hardware included
- (1) Nylon tip socket set screw (HD-NT1)
 - (1) Dog point socket set screw (HD-DP2)

WS 3/64" WIRE VERTICAL
THRU-HOLE GRIPPER
Aluminum

PART	HOLDS	SLOT WIDTH (A)	DEPTH (B)	TO SLOT (C)	TO SET SCREW (D)
WS-AEPG-125R	1/8"	.157"	15/16"	7/16"	1-3/16"
WS-AEPG-250R	1/4"	.280"	7/8"	1/2"	1-3/16"

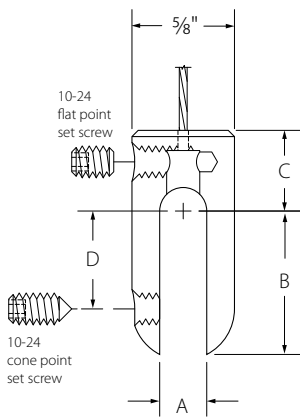

WS-AEPG-125R
(For 1/8" material)




WS-AEPG-250R
(For 1/4" material)

-  Assembly hardware included
- (1) Flat point socket set screw (HD-FPT3)
 - (1) Cone point socket set screw (HD-CP55)
-  Note
- If using with a swaged wire pack, do not use flat point socket set screw (HD-FPT3)
-  Tip
- Use in combination with our Drop Ceiling Clip (HD-DCLIP) for attachment to T-bar drop ceilings. See page HD:11




WS 3/64" WIRE HORIZONTAL
CONNECTOR WITH CAP
Aluminum

PART	LENGTH	WIRE SIZE
WS-A23	1-9/16"	3/64"

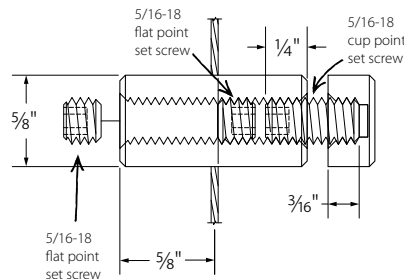

WS-A23

-  Assembly hardware included
- (2) Flat point socket set screw (HD-FPT5)
 - (1) Threaded stud up to 1-1/2" long. Specify stud or material thickness. See page HD:2

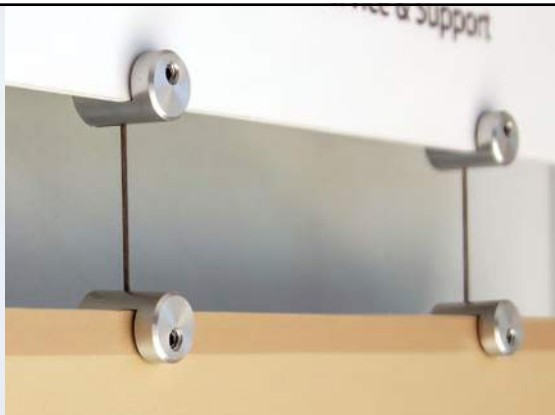


WS 3/64" WIRE
SPREADER BAR
Aluminum

PART	LENGTH (A)	DISTANCE BTW. WIRES (B)	BAR LENGTH (C)	DIA.	WIRE SIZE
WS-A18	8-1/4"	7"	5-3/4"	5/8"	3/64"
WS-A19	12-1/4"	11"	9-3/4"	5/8"	3/64"
WS-A20	14-1/4"	13"	11-3/4"	5/8"	3/64"

-  Assembly hardware included
- (4) Flat point socket set screw (HD-FPT5)
 - (2) Silicone timing washer (HD-563RW)
 - (2) Cup point socket set screw (HD-S20)

 Tip

- Add a finishing cap (SO-CAP26) to create a finished end. See page SO:5

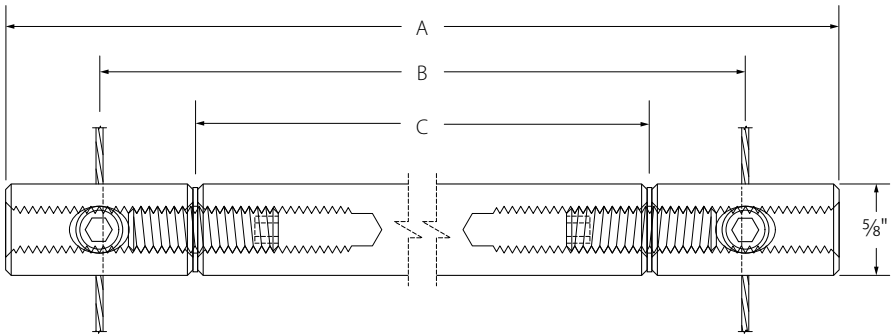

WS-A18



WS-A19




WS-A20



WS 3/64" WIRE
SPREADER BAR WITH
ONE FINISHED END
Aluminum

PART	LENGTH (A)	DISTANCE BTW. WIRES (B)	BAR LENGTH (C)	DIA.	WIRE SIZE
WS-A28	8-1/4"	7"	5-3/4"	5/8"	3/64"
WS-A29	12-1/4"	11"	9-3/4"	5/8"	3/64"
WS-A30	14-1/4"	13"	11-3/4"	5/8"	3/64"

-  Assembly hardware included
- (2) Flat point socket set screw (HD-FPT5)
 - (1) Flat point socket set screw (HD-FPT4)
 - (2) Silicone timing washer (HD-563RW)
 - (2) Cup point socket set screw (HD-S20)

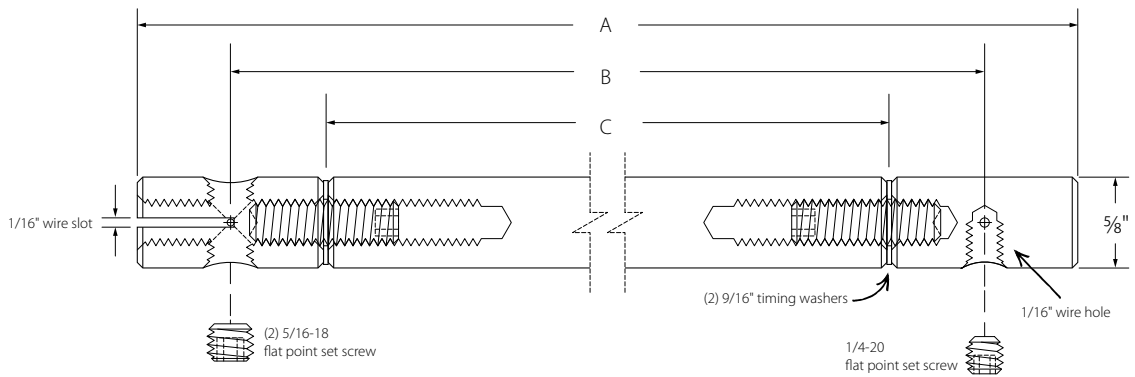


WS-A28



WS-A29




WS-A30

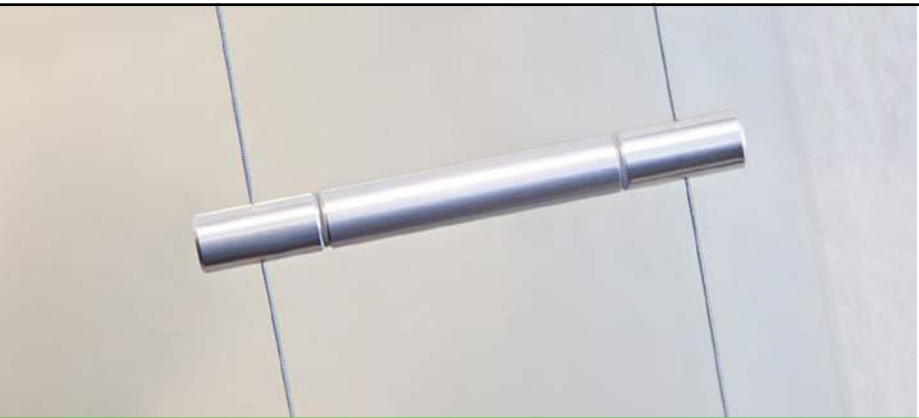

WS 3/64" WIRE
FLYING TURNBUCKLE
Aluminum


PART	DESCRIPTION	LENGTH	WIRE SIZE
WS-A16	flying turnbuckle assembly	3-3/8" to 4-3/8"	3/64"

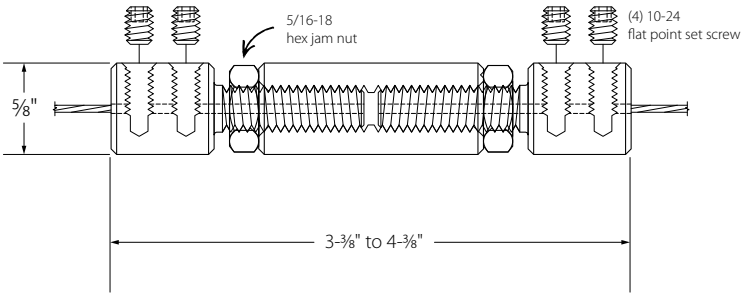

-  **Assembly hardware included**
- (4) Flat point socket set screw (HD-FPT3)
 - (1) Hex jam nut (HD-HJN3)
 - (1) Hex jam nut with left-hand thread (HD-HJN4)
-  **Note**
- This part connects two ends of a single wire or the ends of two different wires. It is primarily used to tension wire in a shelving system or other application where a continuous wire is required

WS 3/64" WIRE
SHELF HUB
Aluminum

PART	HOLDS	LENGTH	WIRE SIZE
WS-A25	1/8" to 5/8"	max 1-15/16"	3/64"

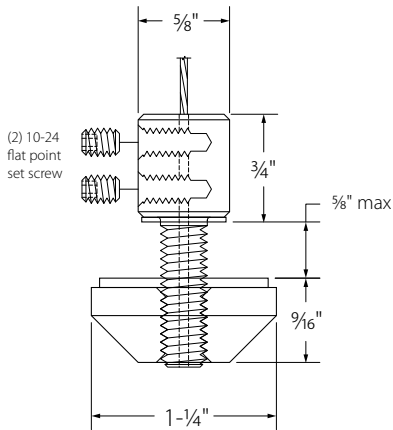

-  **Assembly hardware included**
- (2) Flat point socket set screw (HD-FPT3)
 - (1) Vinyl washer (HD-NW-563)
 - (1) Vinyl washer (HD-NW-1.125)


WS 3/64" WIRE
Stainless Steel

PART	WIRE SIZE	LENGTH
WS-WIRE	3/64"	sold by the foot



WS-WIRE
(3/64" wire)

-  **Note**
- Cut to desired length at time of installation
-  **Tip**
- Use a wire bypass cutter to cut wire without fraying. See page HD:16

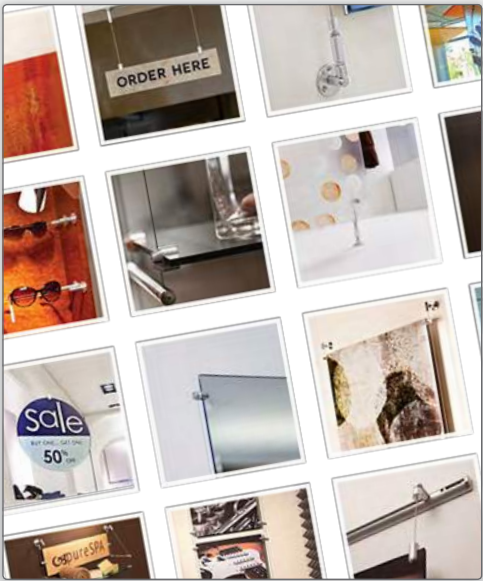

Inspirational Photo Galleries
www.standoffsystems.com/photo-gallery

Application Galleries

- Signage/Awards
- Interior Design/Construction
- Shelving/Displays
- Art/Framing
- Retail/POP
- Exhibits/Museums


Product Line Galleries

- SO | Standoffs
- WS | Wire Suspension
- WL | Rod & Wire
- EZ | Rod & Wire
- SL | StructureLite



WS 3/64" WIRE TOP EXTRUSION MOUNT

Aluminum

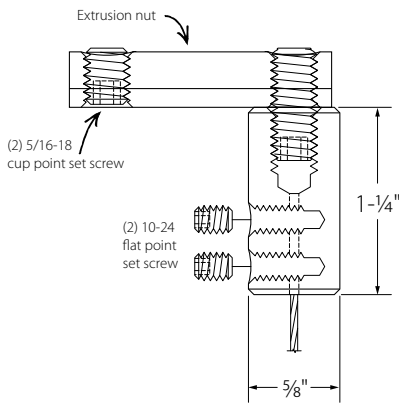


WS-A11B
(Top mount)

- Assembly hardware included**
- (2) Flat point socket set screw (HD-FPT3)
 - (1) Cup point socket set screw (HD-S15)
 - (1) Cup point socket set screw (HD-S18)
- Tip**
- For our extrusion track mounting options, see extrusion **starting on page SL:2**

WS 3/64" WIRE BOTTOM EXTRUSION TURNBUCKLE

Aluminum

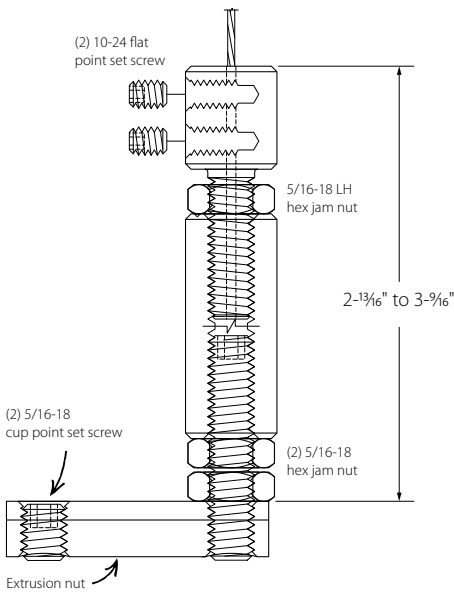


WS-A11
(Bottom mount)

- Assembly hardware included**
- (2) Flat point socket set screw (HD-FPT3)
 - (1) Cup point socket set screw (HD-S15)
 - (1) Cup point socket set screw (HD-S22)
 - (2) Hex jam nut (HD-HJN3)
 - (1) Left hand hex jam nut (HD-HJN4)
- Tip**
- For our extrusion track mounting options, see extrusion **starting on page SL:2**

WS 3/64" WIRE HINGED TOP EXTRUSION MOUNT

Aluminum

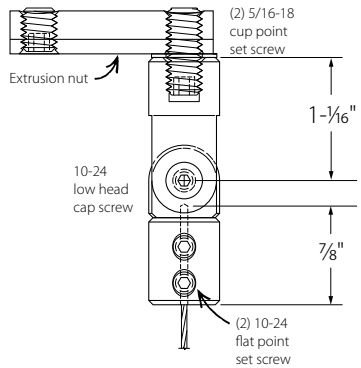


WS-A26B
(Top mount)

- Assembly hardware included**
- (2) Flat point socket set screw (HD-FPT3)
 - (1) Cup point socket set screw (HD-S15)
 - (1) Cup point socket set screw (HD-S18)
 - (1) Low head socket cap screw (HD-LHD2)
 - (1) Silicone timing washer (HD-563RW)

WS 3/64" WIRE HINGED BOTTOM EXTRUSION MOUNT

Aluminum

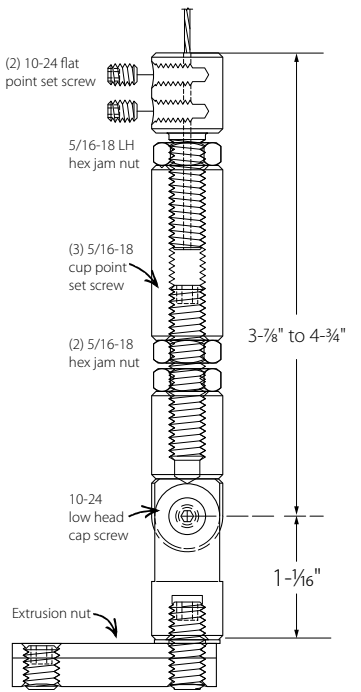

WS-A26
(Bottom mount)


- Assembly hardware included**
- (2) Flat point socket set screw (HD-FPT3)
 - (1) Cup point socket set screw (HD-S15)
 - (1) Cup point socket set screw (HD-S18)
 - (2) Hex jam nut (HD-HJN3)
 - (1) Left hand hex jam nut (HD-HJN4)
 - (1) Low head socket cap screw (HD-LHD2)
 - (1) Silicone timing washer (HD-563RW)
 - (1) Cup point socket set screw (HD-S22)



WS EXTENDED PANEL GRIPPER
WITH BASE PLATE
Aluminum

PART	HOLDS	SLOT WIDTH (A)	HEIGHT
WS-A2B-125	1/8"	0.155"	2-3/4"
WS-A2B-250	1/4"	0.280"	2-3/4"
WS-A2B-375	3/8"	0.405"	2-3/4"
WS-A2B-500	1/2"	0.530"	2-3/4"


- **Installation hardware included**
 - (3) Oval head screw (HD-PS2)
- **Assembly hardware included**
 - (2) Low head socket cap screw (HD-LHD8)
 - WS-A2B-125, WS-A2B-250, WS-A2B-375
 - (1) Cone point socket set screw (HD-CP10)
 - WS-A2B-500
 - (1) Cone point socket set screw (HD-CP9)
- **Tips**
 - Need a different height? Custom barrel sizes are also available

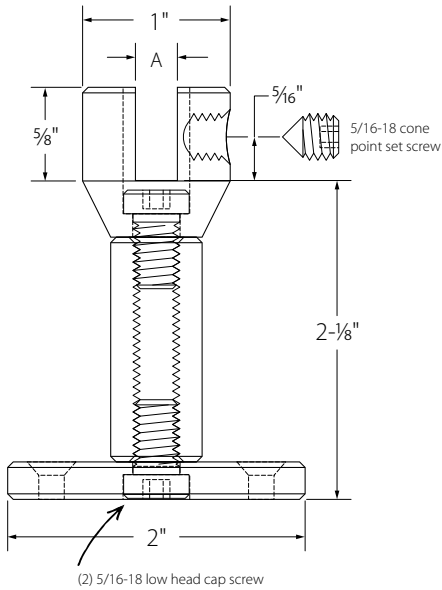


WS ADJUSTABLE PANEL GRIPPER
WITH BASE PLATE
Aluminum

PART	HOLDS	SLOT WIDTH (A)	HEIGHT
WS-A2-125	1/8"	0.155"	3-3/8" to 4-1/8"
WS-A2-250	1/4"	0.280"	3-3/8" to 4-1/8"
WS-A2-375	3/8"	0.405"	3-3/8" to 4-1/8"
WS-A2-500	1/2"	0.530"	3-3/8" to 4-1/8"

- **Installation hardware included**
 - (3) Oval head screw (HD-PS2)
- **Assembly hardware included**
 - (1) Low head socket cap screw (HD-LHD10S)
 - (1) Low head socket cap screw (HD-LHD11S)
 - (3) Hex jam nut (HD-HJN3)
 - WS-A2-125, WS-A2-250, WS-A2-375
 - (1) Cone point socket set screw (HD-CP10)
 - WS-A2-500
 - (1) Cone point socket set screw (HD-CP9)
- **Tips**
 - Need a different height? Custom barrel sizes are also available

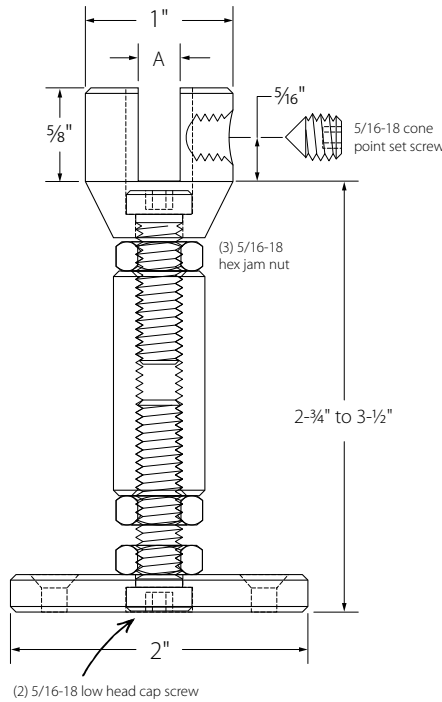

WS HINGED EXTENDED PANEL GRIPPER WITH BASE PLATE
Aluminum

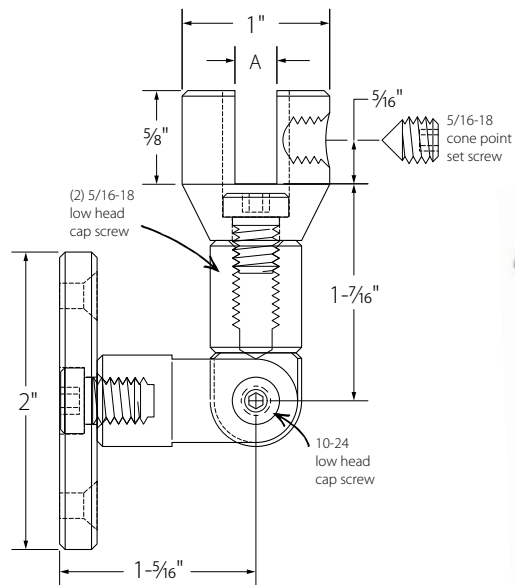


PART	HOLDS	SLOT WIDTH (A)	HINGE TO SLOT
WS-A7B-125	1/8"	0.155"	1-7/16"
WS-A7B-250	1/4"	0.280"	1-7/16"
WS-A7B-375	3/8"	0.405"	1-7/16"
WS-A7B-500	1/2"	0.530"	1-7/16"

- Installation hardware included**
- (3) Oval head screw (HD-PS2)
- Assembly hardware included**
- (2) Low head socket cap screw (HD-LHD7)
 - (1) Low head socket cap screw (HD-LHD2)
 - WS-A7B-125, WS-A7B-250, WS-A7B-375
 - (1) Cone point socket set screw (HD-CP10)
 - WS-A7B-500
 - (1) Cone point socket set screw (HD-CP9)



WS ADJUSTABLE HINGED PANEL GRIPPER WITH BASE PLATE
Aluminum

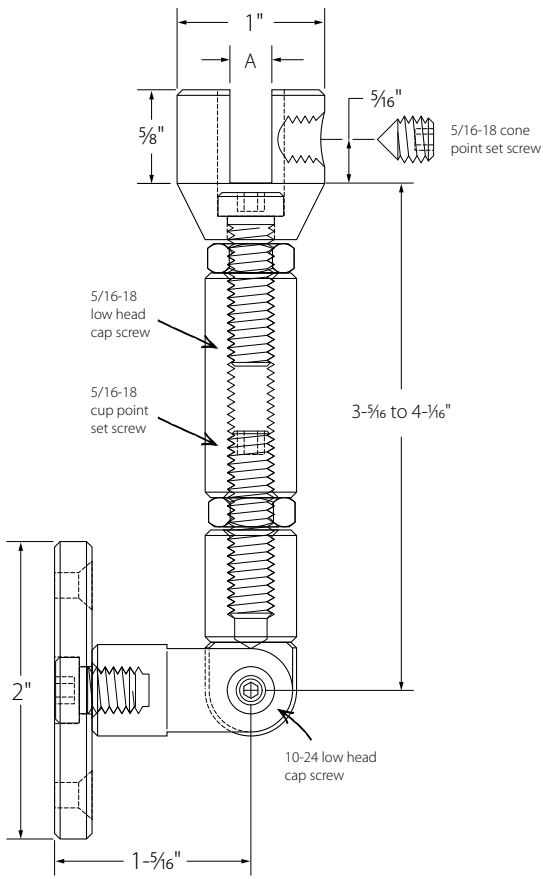

PART	HOLDS	SLOT WIDTH (A)	HINGE TO SLOT
WS-A7-125	1/8"	0.155"	3-5/16" to 4-1/16"
WS-A7-250	1/4"	0.280"	3-5/16" to 4-1/16"
WS-A7-375	3/8"	0.405"	3-5/16" to 4-1/16"
WS-A7-500	1/2"	0.530"	3-5/16" to 4-1/16"

- Installation hardware included**
- (3) Oval head screw (HD-PS2)
- Assembly hardware included**
- (1) Low head socket cap screw (HD-LHD7)
 - (1) Low head socket cap screw (HD-LHD10S)
 - (1) Low head socket cap screw (HD-LHD2)
 - (1) Cup point socket set screw (HD-S22)
 - (2) Hex jam nut (HD-HJN3)
 - WS-A7-125, WS-A7-250, WS-A7-375
 - (1) Cone point socket set screw (HD-CP10)
 - WS-A7-500
 - (1) Cone point socket set screw (HD-CP9)




How-to Videos
www.standoffsystems.com/howto

Visit our library of "how-to" videos on our website. Our Tech Lead will walk you through installing Gyford Standoff Systems parts and hardware.



WS WIRE WALL MOUNTED WIRE SUSPENSION SYSTEM

Aluminum



PART	WIRE SIZE	HOLDS
WSK-1	3/64"	1/8"
WSK-2	3/64"	1/4"

Installation hardware included


- (12) Oval head screw (HD-PS2)

Assembly hardware included

- (2) WS Top Mounts (WS-A6B)
- (2) WS Bottom Mounts (WS-A6)
- (1) 20' Long 3/64" Wire (WS-WIRE)
- WSK-1
 - (4) WS Vertical Grippers (WS-AEVG-125)
- WSK-2
 - (4) WS Vertical Grippers (WS-AEVG-250)

WS WIRE FLOOR TO CEILING WIRE SUSPENSION SYSTEM

Aluminum

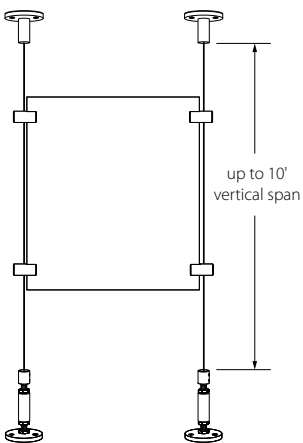

PART	WIRE SIZE	HOLDS
WSK-3	3/64"	1/8"
WSK-4	3/64"	1/4"

Installation hardware included


- (12) Oval head screw (HD-PS2)

Assembly hardware included

- (2) WS Top Mounts (WS-A1B)
- (2) WS Bottom Mounts (WS-A1)
- (1) 20' Long 3/64" Wire (WS-WIRE)
- WSK-3
 - (4) WS Vertical Grippers (WS-AEVG-125)
- WSK-4
 - (4) WS Vertical Grippers (WS-AEVG-250)

WS WIRE DROP CEILING WIRE SUSPENSION SYSTEM

Aluminum

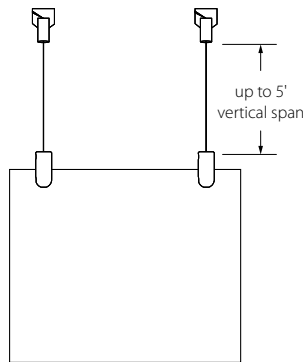

PART	WIRE SIZE	HOLDS
WSK-5	3/64"	1/8"
WSK-6	3/64"	1/4"

Installation hardware included


- (2) Drop Ceiling Clip (HD-DCLIP)

Assembly hardware included

- (1) 10' long 3/64" Wire (WS-WIRE)
- WSK-5
 - (4) WS Vertical Gripper (WS-AEPG-125R)
- WSK-6
 - (2) WS Vertical Gripper (WS-AEPG-125R)
 - (2) WS Vertical Gripper (WS-AEPG-250R)

WS WIRE CEILING MOUNTED WIRE SUSPENSION SYSTEM

Aluminum

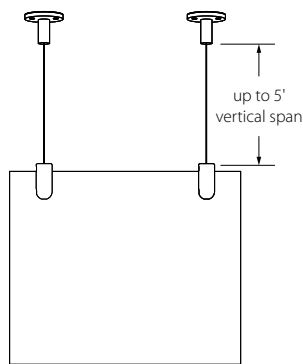

PART	WIRE SIZE	HOLDS
WSK-7	3/64"	1/8"
WSK-8	3/64"	1/4"

Installation hardware included

- (6) Oval head screw (HD-PS2)

Assembly hardware included

- (2) Top Mounts (WS-A1B)
- (1) 10' long 3/64" Wire (WS-WIRE)
- WSK-7
 - (2) WS Vertical Grippers (WS-AEPG-125R)
- WSK-8
 - (2) WS Vertical Grippers (WS-AEPG-250R)

WS INDIVIDUAL AND REPLACEMENT PARTS

Visit our website for product specifications

GRIPPERS



SHELVING & TURNBUCKLE PARTS



WIRE CONNECTORS



PULLEY WHEEL PARTS



BASE MOUNTS



Our Customer Support Team is here to help

Call Us:

775.829.7272

Monday - Friday


7:00 a.m. - 3:30 p.m. (PST)

Email Us:

info@standoffsystems.com


- Full design support
- Installation guidance
- Free quotes
- Send us a sketch or .dwg

WIRE SUSPENSION INDEX

 WS:2	 WS:2	 WS:3	 WS:3	 WS:4	 WS:4
 WS:5	 WS:5			 WS:6	 WS:6
 WS:7	 WS:7			 WS:8	 WS:8
 WS:9	 WS:9	 WS:10	 WS:12	 WS:12	 WS:13
 WS:14	 WS:14	 WS:15	 WS:15	 WS:16	 WS:17

1	WS 3/64" Wire Top Mount with Base Plate WS-A1B	WS:2	14	WS 3/64" Wire Vertical Thru-bolt Gripper WS-AEPG-125R, WS-AEPG-250R	WS:8
2	WS 3/64" Wire Bottom Mount with Base Plate WS-A1	WS:2	15	WS 3/64" Wire Saddle Gripper WS-AESG-125, WS-AESG-250, WS-AESG-375, WS-AESG-500	WS:9
3	WS 3/64" Wire Top Mount with Mounting Screw WS-A27B	WS:3	16	WS 3/64" Horizontal Wire Connector with Cap WS-A23	WS:9
4	WS 3/64" Wire Bottom Mount with Mounting Screw WS-A27	WS:3	17	WS 3/64" Wire Spreader Bar WS-A18, WS-A19, WS-A20, WS-A28, WS-A29 WS-A30	WS:10
5	WS 3/64" Wire Hinged Top Mount with Base Plate WS-A6B	WS:4	18	WS 3/64" Wire Flying Turnbuckle WS-A16	WS:12
6	WS 3/64" Wire Hinged Bottom Mount with Base Plate WS-A6	WS:4	19	WS 3/64" Wire Shelf Hub WS-A25	WS:12
7	WS 3/64" Wire Single Gripper WS-A3-125, WS-A3-250, WS-A3-375, WS-A3-500	WS:5	20	WS 3/64" Wire WS-WIRE	WS:13
8	WS 3/64" Wire Double Gripper WS-A4-125, WS-A4-250, WS-A4-375, WS-A4-500	WS:5	21	WS 3/64" Wire Top Extrusion Mount WS-A11B	WS:14
9	WS 3/64" Wire Econo Vertical Gripper WS-AEVG-125, WS-AEVG-250	WS:6	22	WS 3/64" Wire Bottom Extrusion Turnbuckle WS-A11	WS:14
10	WS 3/64" Wire Econo Double Vertical Gripper WS-AEVDG-125, WS-AEVDG-250	WS:6	23	WS 3/64" Wire Hinged Top Extrusion Mount WS-A26B	WS:15
11	WS 3/64" Wire Shelf Gripper WS-AHEG-250	WS:7	24	WS 3/64" Wire Hinged Bottom Extrusion Mount WS-A26	WS:15
12	WS 3/64" Wire Shelf or Panel Gripper WS-AWSC-250, WS-AWSC-375, WS-AWSC-500	WS:7	25	WS Extended Panel Gripper with Base Plate WS-A2B-125, WS-A2B-250, WS-A2B-375, WS-A2B-500	WS:16
13	WS 3/64" Wire Vertical Gripper WS-A17-125, WS-A17-250, WS-A17-375, WS-A17-500	WS:8	26	WS Adjustable Panel Gripper with Base Plate WS-A2-125, WS-A2-250, WS-A2-375, WS-A2-500	WS:17

WIRE SUSPENSION INDEX

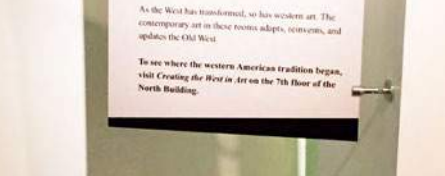 WS:18	 WS:19	 WS:20	 WS:20	 WS:20	 WS:20
		 WS:21	 WS:21		
 WS:21		 WS:21	 WS:21		
 WS:21	 WS:21	 WS:21	 WS:21	 WS:21	 WS:21
 WS:21	 WS:21	 WS:21	 WS:21	 WS:21	

27	WS Hinged Extended Panel Gripper with Base Plate WS-A7B-125, WS-A7B-250, WS-A7B-375, WS-A7B-500	WS:18	38	WS 3/64" Wire Vertical Wire Connector WS-AVWC	WS:21
28	WS Adjustable Hinged Panel Gripper with Base Plate WS-A7-125, WS-A7-250, WS-A7-375, WS-A7-500	WS:19	39	WS Base Plate with Counterbore Thru-hole WS-A2.0WMBL	WS:21
29	WS Wire Wall Mounted Wire Suspension System WSK-1, WSK-2	WS:20	40	WS Shelf Hub WS-SH	WS:21
30	WS Wire Floor to Ceiling Wire Suspension System WSK-3, WSK-4	WS:20	41	WS Turnbuckle Body WS-TB	WS:21
31	WS Wire Drop Ceiling Wire Suspension System WSK-5, WSK-6	WS:20	42	WS 3/64" Wire Threaded Connector WS-ATWCLH (left-hand), WS-ATWCRH (right-hand)	WS:21
32	WS Wire Ceiling Mounted Wire Suspension System WSK-7, WSK-8	WS:20	43	WS 3/64" Wire 1-Way Hub with Slot WS-A1WHW	WS:21
33	WS Shelf or Panel Gripper WS-ASC-125, WS-ASC-250, WS-ASC-375, WS-ASC-500	WS:21	44	WS Hinge Female Component WS-APHF	WS:21
34	WS Hinged Wire Connector WS-AHC	WS:21	45	WS Hinge Male Component WS-PHMR	WS:21
35	WS 3/64" Wire Connector Type 1 (Slotted) WS-AHWC1	WS:21	46	WS 3/64" Wire Hinge Female Component WS-APWCF	WS:21
36	WS 3/64" Wire Connector Type 2 (Slotted) WS-AHWC2	WS:21	47	WS 3/64" Wire Hinge Male Component WS-APWCM	WS:21
37	WS 3/64" Wire Connector Type 3 (Finished End) WS-AHWC3	WS:21			

EZ-Rod & Wire


EZ 1/8" Wire Surface Mounts	EZ:2
EZ 1/8" Wire	EZ:9
EZ 1/8" Wire Panel Grippers	EZ:10
EZ 1/8" Wire Shelving Components	EZ:17
EZ Surface Mounted Grippers	EZ:21
EZ Rod Surface Mounts (1/4", 3/8" & 5/8" Rod)	EZ:22
EZ Rod Panel Grippers (1/4", 3/8" & 5/8" Rod)	EZ:28
EZ Wire Suspension Kits	EZ:36
EZ Rod & Wire Individual & Replacement Parts	EZ:37
EZ Rod & Wire Index	EZ:40



This EZ-Rod & Wire line can be used for suspending applications up to 200 lbs. It is designed for a variety of rod and wire diameters. This line allows for flexibility in combining 1/4", 3/8" a 5/8" rod and 1/8" wire from flat or angled surfaces.

EZ 1/8" WIRE TOP MOUNT
WITH BASE PLATE

Aluminum

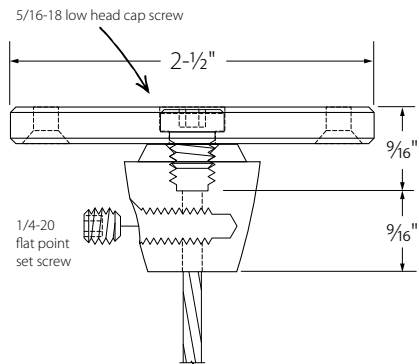


EZ-A27
(Top mount)

- Installation hardware included
 - (3) Oval head screw (HD-PS2)
- Assembly hardware included
 - (1) Flat point socket set screw (HD-FPT4)
 - (1) Low head socket cap screw (HD-LHD65)

EZ 1/8" WIRE BOTTOM TURNBUCKLE
WITH BASE PLATE

Aluminum

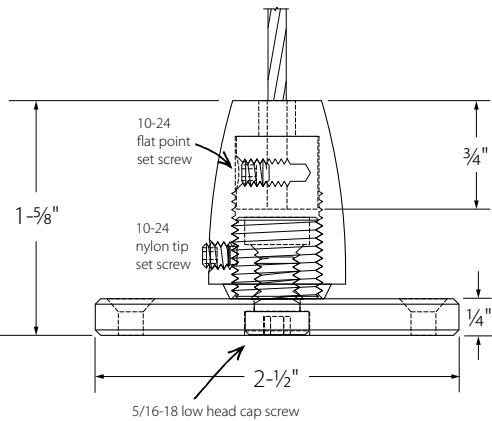


EZ-A28
(Bottom mount)

- Installation hardware included
 - (3) Oval head screw (HD-PS2)
- Assembly hardware included
 - (1) Flat point socket set screw (HD-FPT2)
 - (1) Nylon tip socket set screw (HD-NT1)
 - (1) Low head socket cap screw (HD-LHD7)

EZ 1/8" WIRE HEAVY TOP
MOUNT TURNBUCKLE WITH
BASE PLATE


Aluminum

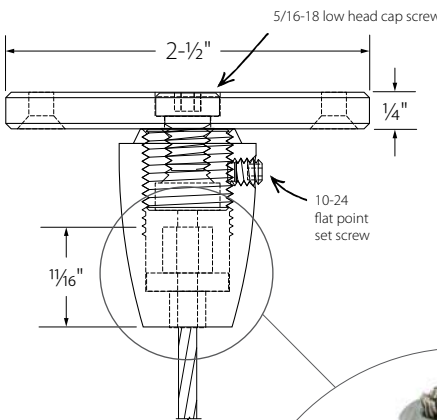

- Installation hardware included
 - (3) Oval head screw (HD-PS2)
- Assembly hardware included
 - (1) EZ 2.5" base mount (EZ-A2.5WMBL)
 - (1) Low head socket cap screw (HD-LHD7)
 - (1) EZ 1/8" Wire Stopper (EZ-HW-125)
 - (1) EZ Turnbuckle Assembly (EZ-TB)
 - (1) Turnbuckle connection (EZ-TMS)
 - (1) Stop crimp sleeve (EZ-SL-125)




CAT Graphics, Inc.

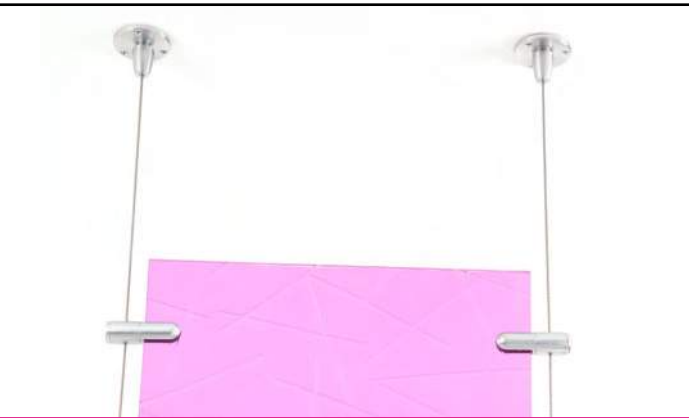

The Baldus Company

EZ 1/8" WIRE HINGED TOP MOUNT WITH BASE PLATE
Aluminum

PART	CONNECTION	€ HINGE TO END	WIRE SIZE
EZ-A19	top mount	1-5/8"	1/8"

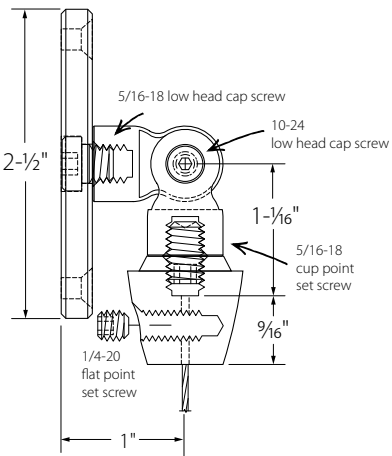


- Installation hardware included**
- (3) Oval head screw (HD-PS2)
- Assembly hardware included**
- (1) Flat point socket set screw (HD-FPT4)
 - (1) Low head socket cap screw (HD-LHD65)
 - (1) Low head socket cap screw (HD-LHD2)
 - (1) Cup point socket set screw (HD-S16)



EZ 1/8" WIRE HINGED BOTTOM MOUNT WITH BASE PLATE
Aluminum

PART	CONNECTION	€ HINGE TO END	WIRE SIZE
EZ-A20	bottom mount	2-1/8"	1/8"

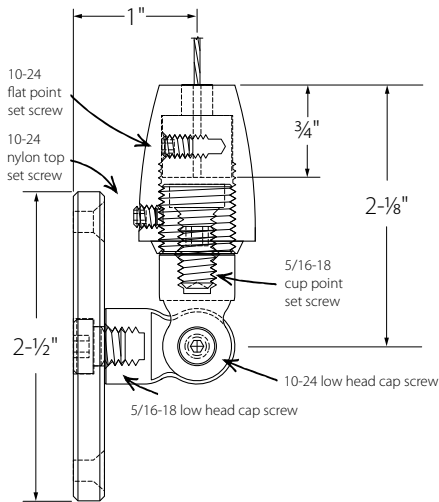


- Installation hardware included**
- (3) Oval head screw (HD-PS2)
- Assembly hardware included**
- (1) Flat point socket set screw (HD-FPT2)
 - (1) Nylon tip socket set screw (HD-NT1)
 - (1) Low head socket cap screw (HD-LHD65)
 - (1) Low head socket cap screw (HD-LHD2)
 - (1) Cup point socket set screw (HD-S16)



EZ 1/8" WIRE HEAVY HINGED TURNBUCKLE WITH BASE PLATE
Aluminum

PART	CONNECTION	€ HINGE TO END	WIRE SIZE
EZ-AH20PO	top mount	2-1/8"	1/8"

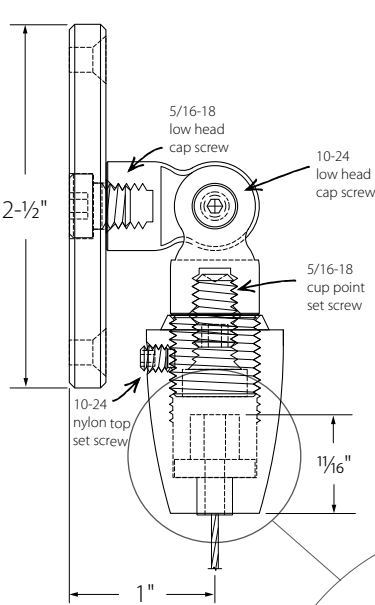

Note

- Heavy duty mounting option. Use the EZ-AH20PO for a heavy-duty top mount. This is sold unassembled for use with a wire stop crimp sleeve or pre-swaged wire installation (EZ-AWIRE10, or EZ-AWIRE15).




- Installation hardware included**
- (3) Oval head screw (HD-PS2)
- Assembly hardware included**
- (1) Low head socket cap screw (HD-LHD65)
 - (1) Low head socket cap screw (HD-LHD2)
 - (1) Nylon tip socket set screw (HD-NT1)
 - (1) Cup point socket set screw (HD-S16)
 - (1) Stop crimp sleeve (HD-SL-125)



EZ 1/8" WIRE 90° TOP WALL MOUNT WITH BASE PLATE

Aluminum

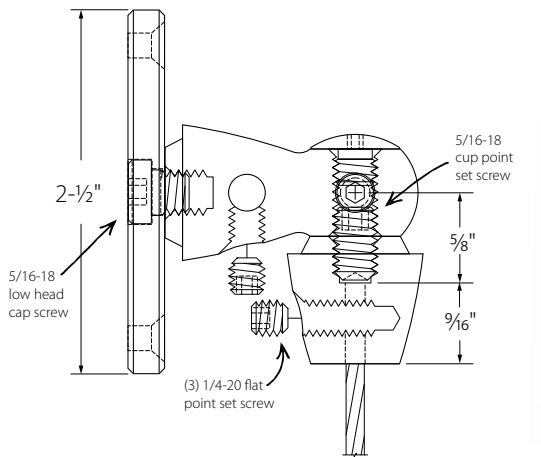

PART	CONNECTION	℄ CONNECTOR TO END	WIRE SIZE
EZ-A33-W125	top mount	1-3/16"	1/8"

- Installation hardware included
 - (3) Oval head screw (HD-PS2)
- Assembly hardware included
 - (3) Flat point socket set screw (HD-FPT4)
 - (1) Low head socket cap screw (HD-LHD65)
 - (1) Cup point socket set screw (HD-S16)




EZ-A33-W125 (Top mount)



EZ 1/8" WIRE 90° BOTTOM WALL MOUNT WITH BASE PLATE

Aluminum

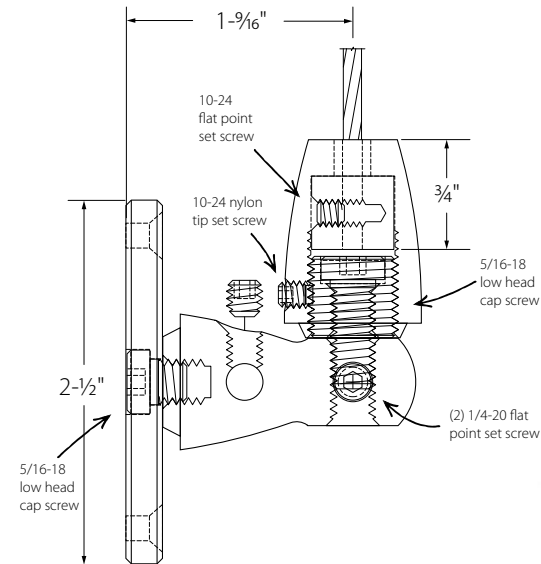

PART	CONNECTION	℄ CONNECTOR TO END	WIRE SIZE
EZ-A34-W125	bottom mount	1-11/16"	1/8"

- Installation hardware included
 - (3) Oval head screw (HD-PS2)
- Assembly hardware included
 - (2) Flat point socket set screw (HD-FPT4)
 - (1) Flat point socket set screw (HD-FPT2)
 - (1) Nylon tip socket set screw (HD-NT1)
 - (1) Low head socket cap screw (HD-LHD65)
 - (1) Low head socket cap screw (HD-LHD9)




EZ-A34-W125 (Bottom mount)



EZ 1/8" WIRE 90° HEAVY WALL MOUNT WITH BASE PLATE

Aluminum

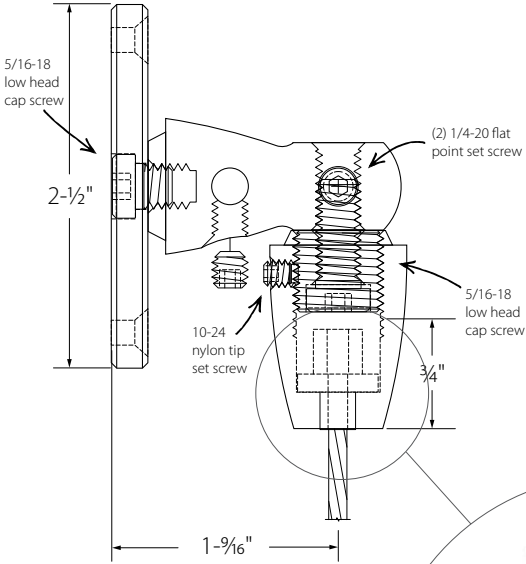

PART	CONNECTION	℄ CONNECTOR TO END	WIRE SIZE
EZ-AH33-W125PO	top mount	2"	1/8"

- Installation hardware included
 - (3) Oval head screw (HD-PS2)
- Assembly hardware included
 - (1) Stop crimp sleeve (HD-SL-125)
 - (1) Cup point socket set screw (HD-S18)
 - (1) Nylon tip socket set screw (HD-NT1)
 - (1) Low head socket cap screw (HD-LHD65)




Note
• Heavy duty mounting option. Use the EZ-AH33-W125PO for a heavy-duty top mount. This is sold unassembled for use with a wire stop crimp sleeve or pre-swaged wire installation (EZ-AWIRE10, or EZ-AWIRE15).



EZ 1/8" WIRE HEAVY ANGLED
SURFACE TOP MOUNT

Aluminum

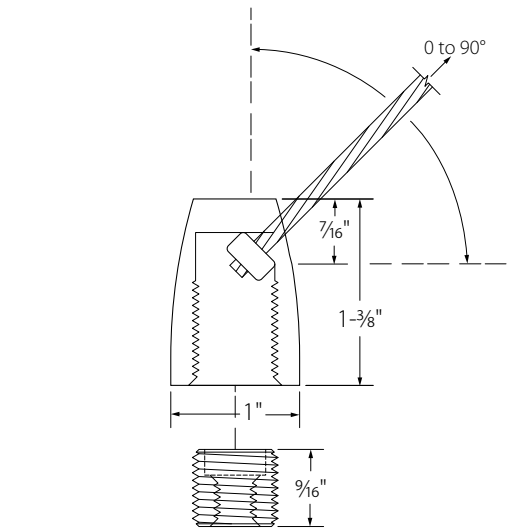

PART	USE WITH	LENGTH	WIRE SIZE
EZ-APCA	swaged wire pack	1-3/8"	1/8"


- Tip**
- Installation hardware sold separately. See hardware section for available options



EZ-APCA
(Top mount)

EZ 1/8" WIRE HEAVY ANGLED SURFACE
TOP MOUNT WITH BASE PLATE

Aluminum

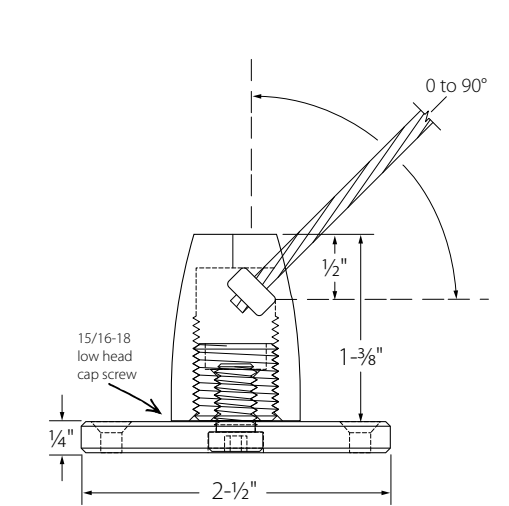

PART	USE WITH	LENGTH	WIRE SIZE
EZ-A53	swaged wire pack	1-5/8"	1/8"

- Installation hardware included**
- (3) Oval head screw (HD-PS2)
- Assembly hardware included**
- (1) Low head socket cap screw (HD-LHD8)

EZ-A53
(Bottom mount)



EZ 1/8" WIRE BY THE FOOT

Stainless Steel

PART	WIRE SIZE	LENGTH
EZ-WIRE-125	1/8"	sold by the foot

- Note**
- Cut to desired length at time of installation

- Tip**
- Use a wire bypass cutter to cut wire without fraying. See page HD:16



EZ-WIRE-125
(1/8" wire)



EZ 1/8" SWAGED WIRE PACKS

Stainless Steel

PART	WIRE SIZE	LENGTH
EZ-AWIRE10	1/8"	10' 6"
EZ-AWIRE15	1/8"	15' 6"


- Tip**
- Use a wire bypass cutter to cut wire without fraying. See page HD:16



EZ-AWIRE10
(10' 6" of 1/8" wire with swaged end)




EZ-AWIRE15
(15' 6" of 1/8" wire with swaged end)

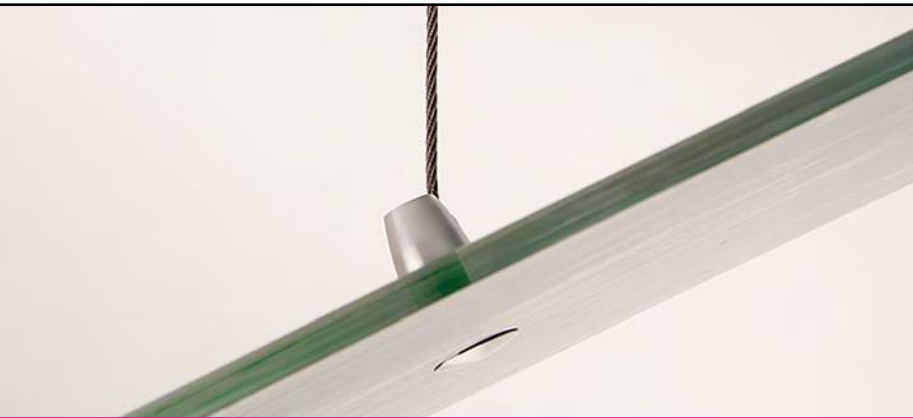

EZ 1/8" WIRE SINGLE GRIPPER

Aluminum

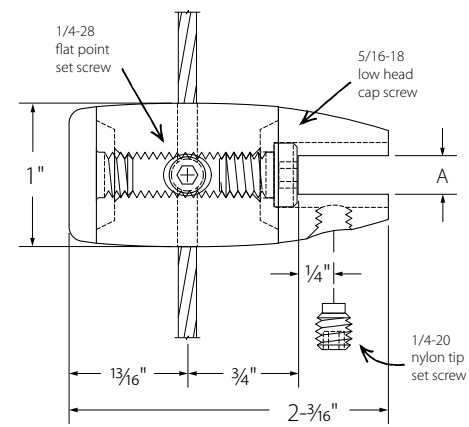

PART	HOLDS	SLOT OPENING (A)	LENGTH	WIRE SIZE
EZ-A5-125R	1/8"	.155"	2-3/16"	1/8"
EZ-A5-250R	1/4"	.265"	2-3/16"	1/8"
EZ-A5-375R	3/8"	.390"	2-3/16"	1/8"
EZ-A5-500R	1/2"	.515"	2-3/16"	1/8"
EZ-A5-750R	3/4"	.755"	2-3/16"	1/8"

- Assembly hardware included
- (1) Flat point socket set screw (HD-FPT9)
 - (1) Low head socket cap screw (HD-LHD7)
 - EZ-A5-125R, EZ-A5-250R
 - (1) Nylon tip socket set screw (HD-NT4)
 - EZ-A5-375R, EZ-A5-500R, EZ-A5-750R
 - (1) Nylon tip socket set screw (HD-NT3)


Note

- Grippers rotate and can be fixed at any angle



EZ 1/8" WIRE DOUBLE GRIPPER

Aluminum

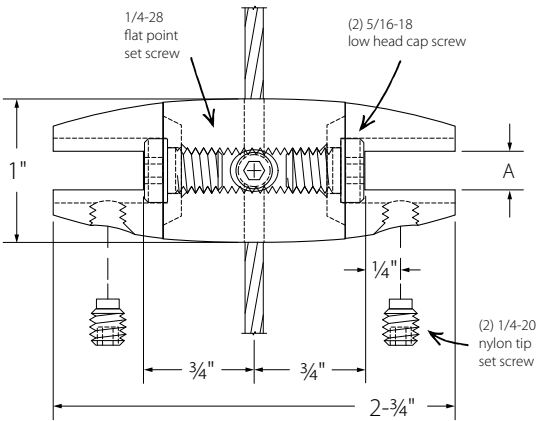

PART	HOLDS	SLOT OPENING (A)	LENGTH	WIRE SIZE
EZ-A6-125R	1/8"	.155"	2-3/4"	1/8"
EZ-A6-250R	1/4"	.265"	2-3/4"	1/8"
EZ-A6-375R	3/8"	.390"	2-3/4"	1/8"
EZ-A6-500R	1/2"	.515"	2-3/4"	1/8"
EZ-A6-750R	3/4"	.755"	2-3/4"	1/8"

- Assembly hardware included
- (1) Flat point socket set screw (HD-FPT9)
 - (2) Low head socket cap screw (HD-LHD7)
 - EZ-A6-125R, EZ-A6-250R
 - (2) Nylon tip socket set screw (HD-NT4)
 - EZ-A6-375R, EZ-A6-500R, EZ-A6-750R
 - (2) Nylon tip socket set screw (HD-NT3)

Note


- Grippers rotate and can be fixed at any angle



EZ 1/8" WIRE

THRU-HOLE GRIPPER

Aluminum

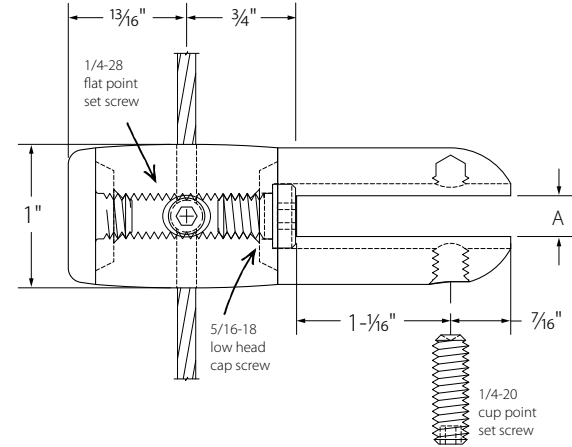

PART	HOLDS	SLOT OPENING (A)	LENGTH	WIRE SIZE
EZ-A58-250	1/4"	.280"	3-1/16"	1/8"
EZ-A58-375	3/8"	.445"	3-1/16"	1/8"
EZ-A58-500	1/2"	.530"	3-1/16"	1/8"

- Assembly hardware included
- (1) Flat point socket set screw (HD-FPT9)
 - (1) Low head socket cap screw (HD-LHD7)
 - (1) Cup point socket set screw (HD-S105)

Note


- Grippers rotate and can be fixed at any angle



EZ 1/8" WIRE DOUBLE PANEL

THRU-HOLE GRIPPER

Aluminum

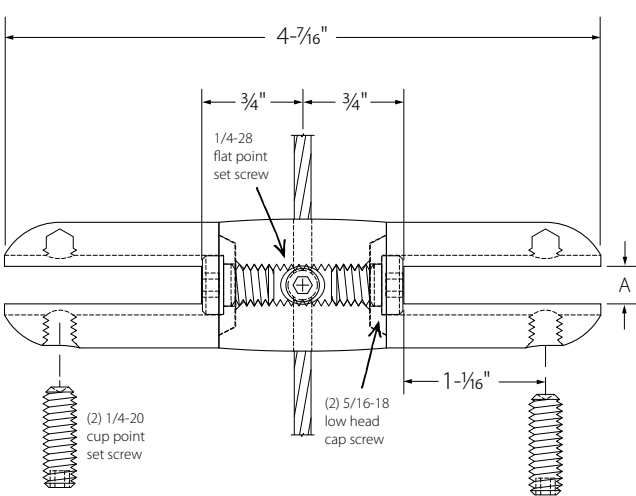


PART	HOLDS	SLOT OPENING (A)	LENGTH	WIRE SIZE
EZ-A59-250	1/4"	.280"	4-7/16"	1/8"
EZ-A59-375	3/8"	.445"	4-7/16"	1/8"
EZ-A59-500	1/2"	.530"	4-7/16"	1/8"

- Assembly hardware included
- (1) Flat point socket set screw (HD-FPT9)
 - (2) Low head socket cap screw (HD-LHD7)
 - (2) Cup point socket set screw (HD-S105)


Note

- Grippers rotate and can be fixed at any angle

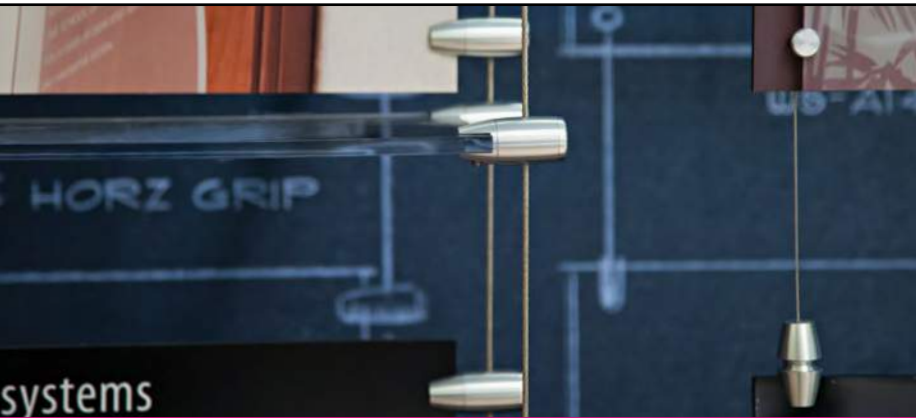

EZ 1/8" WIRE VERTICAL
PANEL GRIPPER

Aluminum

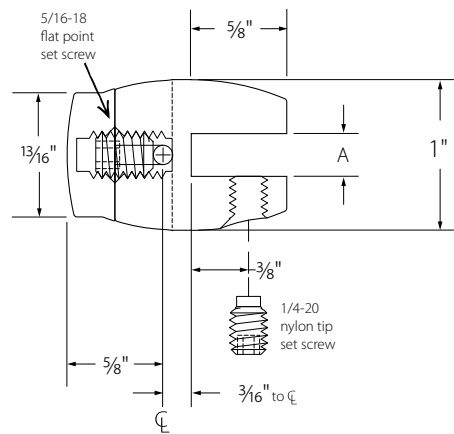

PART	HOLDS	SLOT OPENING (A)	LENGTH	WIRE SIZE
EZ-AVGC-250	1/4"	.280"	3-1/16"	1/8"
EZ-AVGC-375	3/8"	.445"	3-1/16"	1/8"
EZ-AVGC-500	1/2"	.530"	3-1/16"	1/8"

-  Assembly hardware included
- (1) Flat point socket set screw (HD-FPT6)
EZ-AVGC-250
 - (1) Nylon tip socket set screw (HD-NT5)
EZ-AVGC-375
 - (1) Nylon tip socket set screw (HD-NT4)
EZ-AVGC-500
 - (1) Nylon tip socket set screw (HD-NT3)



EZ-AVGC-250
(For 1/4" material)




EZ-AVGC-375
(For 3/8" material)



EZ-AVGC-500
(For 1/2" material)

EZ 1/8" WIRE HORIZONTAL
SHELF GRIPPER

Aluminum

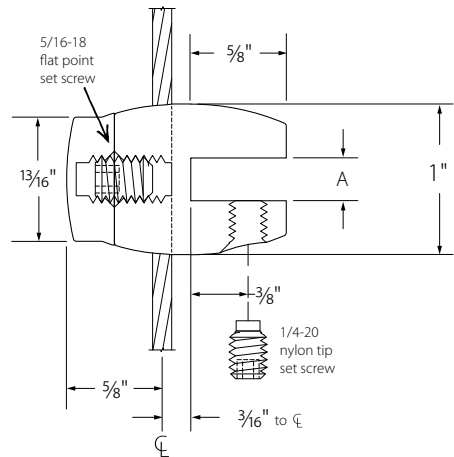

PART	HOLDS	SLOT OPENING (A)	LENGTH	WIRE SIZE
EZ-AHGC-250	1/4"	.280"	3-1/16"	1/8"
EZ-AHGC-375	3/8"	.445"	3-1/16"	1/8"
EZ-AHGC-500	1/2"	.530"	3-1/16"	1/8"

-  Assembly hardware included
- (1) Flat point socket set screw (HD-FPT6)
EZ-AHGC-250
 - (1) Nylon tip socket set screw (HD-NT5)
EZ-AHGC-375
 - (1) Nylon tip socket set screw (HD-NT4)
EZ-AHGC-500
 - (1) Nylon tip socket set screw (HD-NT3)



EZ-AHGC-250
(For 1/4" material)




EZ-AHGC-375
(For 3/8" material)



EZ-AHGC-500
(For 1/2" material)

EZ 1/8" WIRE VERTICAL
DOUBLE PANEL GRIPPER

Aluminum

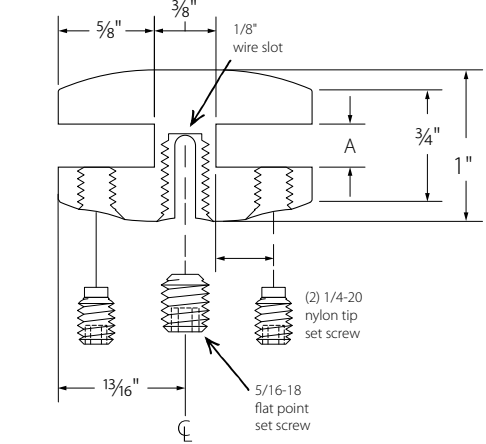

PART	HOLDS	SLOT OPENING (A)	LENGTH	WIRE SIZE
EZ-AVDG-250	1/4"	.280"	1-5/8"	1/8"
EZ-AVDG-375	3/8"	.405"	1-5/8"	1/8"

-  Assembly hardware included
- (1) Flat point socket set screw (HD-FPT6)
EZ-AVDG-250
 - (2) Nylon tip socket set screw (HD-NT5)
EZ-AVDG-375
 - (2) Nylon tip socket set screw (HD-NT4)




EZ-AVDG-250
(For 1/4" material)



EZ-AVDG-375
(For 3/8" material)

EZ 1/8" WIRE HORIZONTAL
DOUBLE SHELF GRIPPER

Aluminum

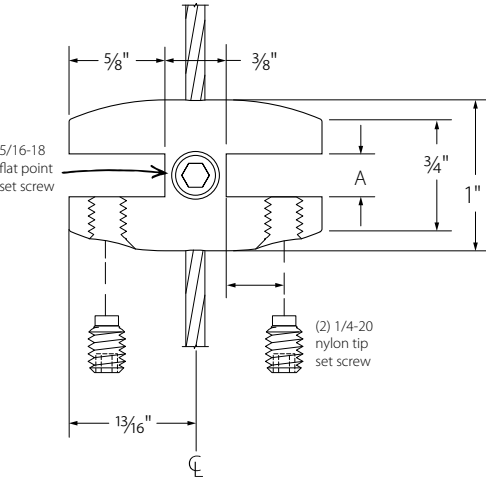

PART	HOLDS	SLOT OPENING (A)	LENGTH	WIRE SIZE
EZ-AHDG-375	3/8"	.405"	1-5/8"	1/8"
EZ-AHDG-500	1/2"	.530"	1-5/8"	1/8"

-  Assembly hardware included
- (1) Flat point socket set screw (HD-FPT6)
EZ-AHDG-250
 - (2) Nylon tip socket set screw (HD-NT4)
EZ-AHDG-375
 - (2) Nylon tip socket set screw (HD-NT3)




EZ-AHDG-375
(For 3/8" material)



EZ-AHDG-500
(For 1/2" material)



EZ 1/8" WIRE VERTICAL
PANEL GRIPPER
Aluminum

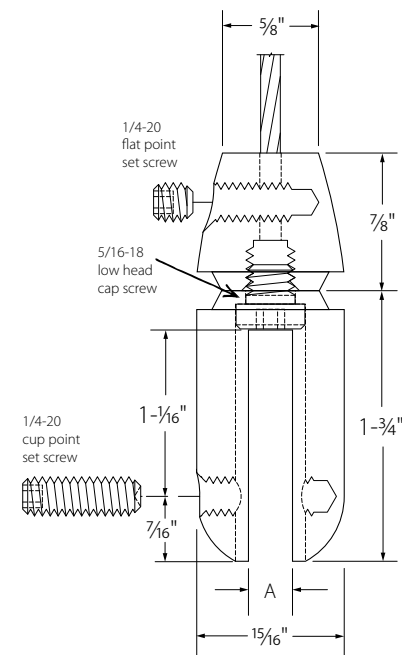


PART	HOLDS	SLOT OPENING (A)	LENGTH	WIRE SIZE
EZ-A43-250	1/4"	.280"	2-5/8"	1/8"
EZ-A43-375	3/8"	.445"	2-5/8"	1/8"
EZ-A43-500	1/2"	.530"	2-5/8"	1/8"

-  Assembly hardware included
- (1) Flat point socket set screw (HD-FPT4)
 - (1) Low head socket cap screw (HD-LHD65)
 - (1) Cup point socket set screw (HD-S105)



EZ 1/8" WIRE VERTICAL
HEAVY PANEL GRIPPER
Aluminum

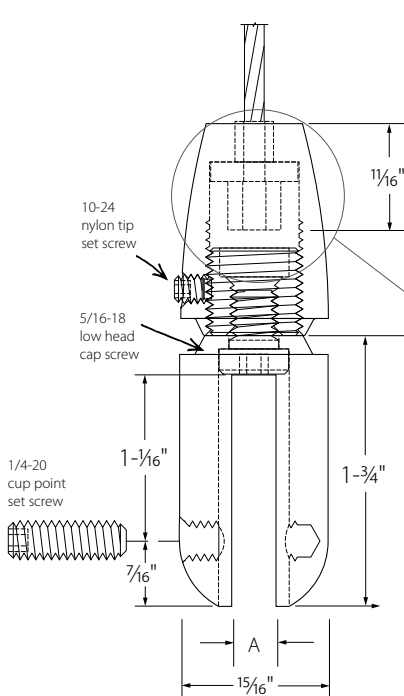

PART	HOLDS	SLOT OPENING (A)	LENGTH	WIRE SIZE
EZ-AH43-250PO	1/4"	.280"	3-1/8"	1/8"
EZ-AH43-375PO	3/8"	.445"	3-1/8"	1/8"
EZ-AH43-500PO	1/2"	.530"	3-1/8"	1/8"


-  Assembly hardware included
- (1) Cup point socket set screw (HD-S105)
 - (1) Nylon tip socket set screw (HD-NT1)
 - (1) Low head socket cap screw (HD-LHD7)
 - (1) Stop crimp sleeve (HD-SL-125)



EZ 1/8" WIRE CONNECTOR
WITH CAP
Aluminum

PART	DIAMETER	WIRE SIZE
EZ-A50	1"	1/8"


-  **Assembly hardware included**
- (1) Flat point socket set screw (HD-FPT9)
 - (1) Threaded stud up to 1-1/2" long. Specify stud or material thickness. [See page HD:2](#)

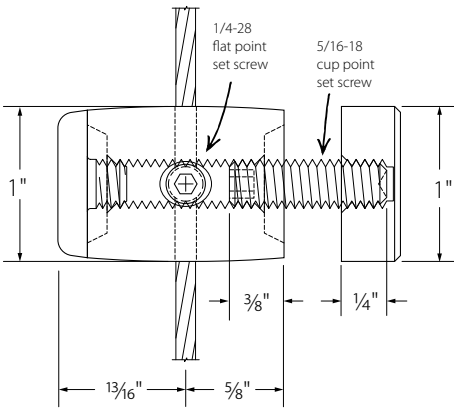

EZ 1/8" WIRE SADDLE GRIPPER
Aluminum

PART	HOLDS	SLOT OPENING (A)	SLOT TO $\varnothing$ (B)	WIRE SIZE
EZ-A8-125R	1/8"	.155"	1-1/16"	1/8"
EZ-A8-250R	1/4"	.265"	1"	1/8"
EZ-A8-375R	3/8"	.385"	15/16"	1/8"
EZ-A8-500R	1/2"	.515"	7/8"	1/8"

-  **Assembly hardware included**
- (1) Flat point socket set screw (HD-FPT9)
 - (1) Cone point socket set screw (HD-CP3)
 - [EZ-A8-125R, EZ-A8-250R](#)
 - (1) Nylon tip set screw (HD-NT8)
 - [EZ-A8-375R, EZ-A8-500R](#)
 - (1) Nylon tip set screw (HD-NT7)

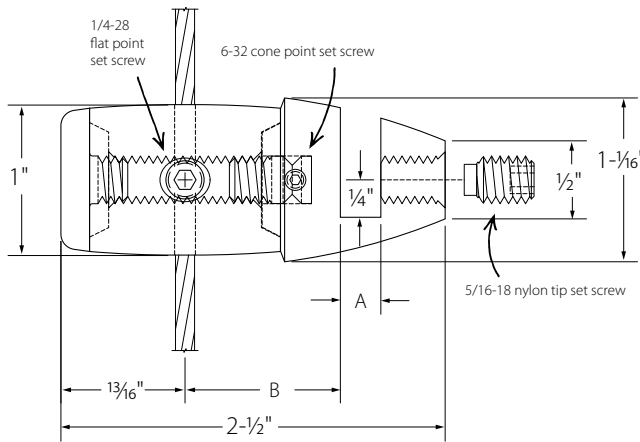


EZ 1/8" WIRE PULLEY WHEEL
WITH BASE PLATE
Aluminum

PART	LENGTH	DIAMETER	WIRE SIZE
EZ-APW	2-9/16"	2"	1/8"

-  **Installation hardware included**
- (3) Oval head screw (HD-PS2)
-  **Assembly hardware included**
- (1) Low head socket cap screw (HD-LHD7)
 - (1) Low head socket cap screw (HD-LHD625)

 **Note**

- Pulley wheels are decorative and can be used as a top or bottom connection with the tensioning flying turnbuckle (pictured below)

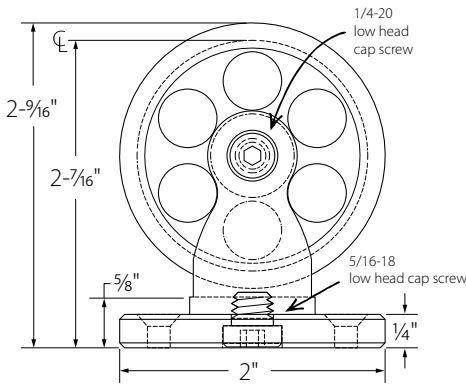


EZ 1/8" WIRE FLYING
TURNBUCKLE
Aluminum

PART	LENGTH	WIRE SIZE
EZ-AH45PO	2-3/4" - 3-1/2"	1/8"

-  **Assembly hardware included**
- (2) EZ Turnbuckle Assembly (EZ-TB)
 - (2) EZ Standard Turnbuckle Connection (EZ-TMS)
 - (2) EZ 1/8" Wire Stopper (EZ-HW-125)
 - (2) Stop crimp sleeve (HD-SL-125)
 - (2) Nylon tip set screw (HD-NT1)
 - (1) Vinyl washer (HD-NW-563)
 - (1) Low head cap screw (HD-LHD9)

 **Note**

- Connect two ends of a single wire or connect the ends of two wires
- This is sold unassembled

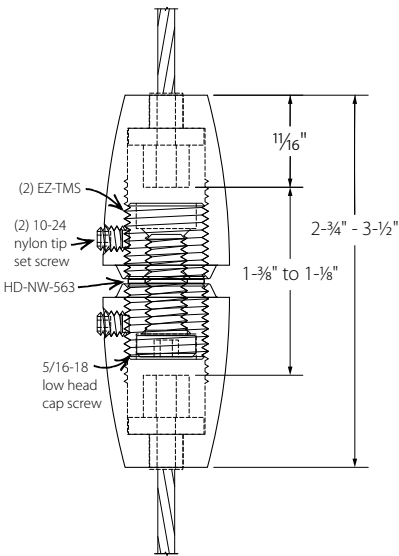

EZ 1/8" WIRE SPREADER BAR
Aluminum

PART	LENGTH (A)	DISTANCE BTW. WIRES (B)	BAR LENGTH (C)	DIA.
EZ-A46	8-5/16"	7-1/8"	5-3/4"	5/8"
EZ-A47	12-5/16"	11-1/8"	9-3/4"	5/8"
EZ-A48	14-5/16"	13-1/8"	11-3/4"	5/8"

**Assembly hardware included**


- (2) Flat point socket set screw (HD-FPT5)
- (2) Cup point socket set screw (HD-S20)
- (2) Silicone timing washer (HD-563RW)

**Tip**

- Add a finishing cap (SO-CAP26) to create a finished end. [See page SO:5](#)





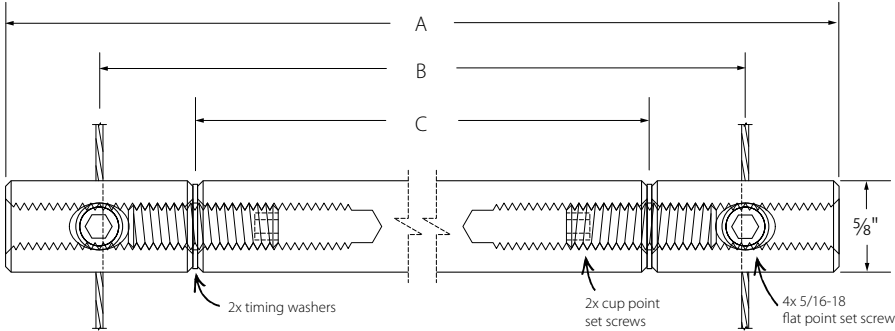

EZ-A46



EZ-A47



EZ-A48




EZ 1/8" WIRE SPREADER BAR
WITH FINISHED END
Aluminum

PART	LENGTH (A)	DISTANCE BTW. WIRES (B)	BAR LENGTH (C)	DIA.
EZ-A63	8-1/4"	7-1/16"	5-3/4"	5/8"
EZ-A64	12-1/4"	11-1/16"	9-3/4"	5/8"
EZ-A65	14-1/4"	13-1/16"	11-3/4"	5/8"

**Assembly hardware included**

- (1) Flat point socket set screw (HD-FPT5)
- (1) Flat point socket set screw (HD-FPT4)
- (2) Cup point socket set screw (HD-S20)
- (2) Silicone timing washer (HD-563RW)

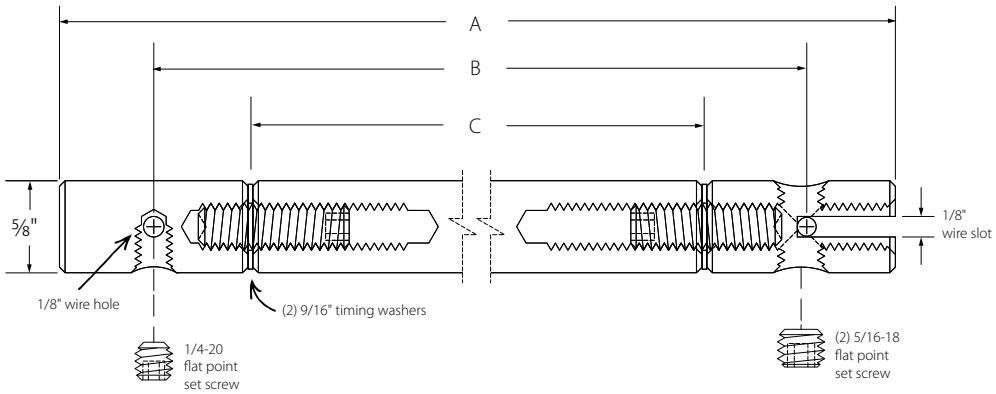

EZ-A63



EZ-A64




EZ-A65



EZ 1/8" WIRE SHELF HUB

Aluminum

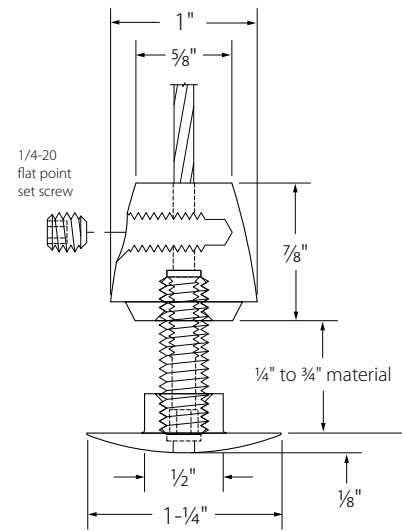


PART	USE FOR	WIRE SIZE
EZ-A40	multiple shelves	1/8"

- Assembly hardware included
 - (1) Flat point socket set screw (HD-FPT4)
 - (1) Threaded stud up to 1" long. Specify stud or material thickness. See page HD:2
- Tip
 - Minimum 1/4" material thickness
 - Maximum 3/4" material thickness



EZ 1/8" WIRE ANGLED PANEL CONNECTOR

Aluminum

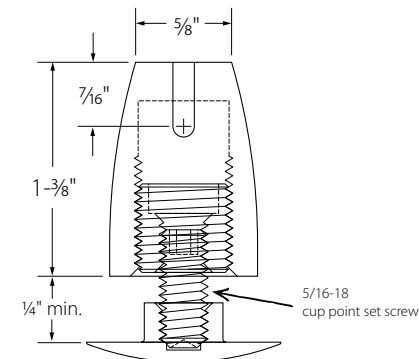


PART	USE FOR	WIRE SIZE
EZ-A44	single shelf	1/8"

- Assembly hardware included
 - (1) Threaded stud up to 1" long. Specify stud or material thickness. See page HD:2
- Note
 - Requires a swaged ball wire fitting or stop-crimp sleeve
- Tip
 - Minimum 1/4" material thickness
 - Maximum 3/4" material thickness



EZ PANEL GRIPPER WITH BASE PLATE

Aluminum

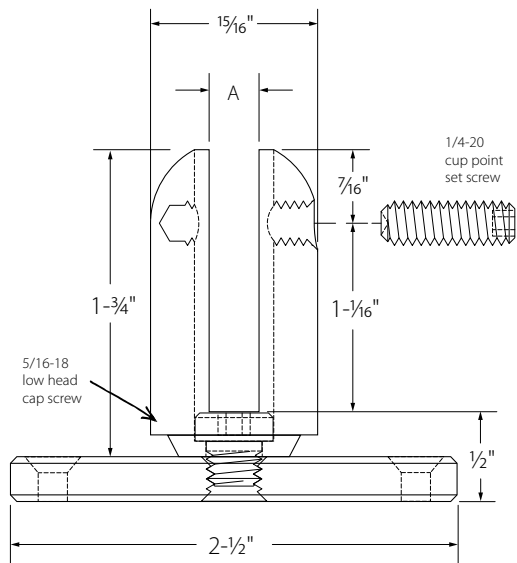

PART	HOLDS	SLOT WIDTH (A)	HEIGHT
EZ-A41-250	1/4"	.280"	2"
EZ-A41-375	3/8"	.445"	2"
EZ-A41-500	1/2"	.530"	2"

- Installation hardware included
 - (3) Oval head screw (HD-PS2)
- Assembly hardware included
 - (1) Low head socket cap screw (HD-LHD65)
 - (1) Cup point socket set screw (HD-S105)
- Tip
 - The gripper uses a cup point set screw and will require a 5/16" hole to allow for installation material




Inspirational Photo Galleries
www.standoffsystems.com/photo-gallery

- Signage/Awards
 - Interior Design/Construction
 - Shelving/Displays
- Art/Framing
 - Retail/POP
 - Exhibits/Museums



EZ 1/4" ROD TOP MOUNT
WITH BASE PLATE

Aluminum

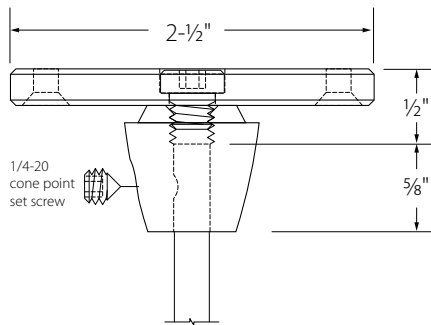

PART	CONNECTION	LENGTH	ROD SIZE
EZ-A29	top mount	1-1/8"	1/4"

- Installation hardware included
 - (3) Oval head screw (HD-PS2)
- Assembly hardware included
 - (1) Low head socket cap screw (HD-LHD65)
 - (1) Cone point socket set screw (HD-CP75)




EZ-A29
(Top mount)



EZ 3/8" ROD TOP MOUNT
WITH BASE PLATE

Aluminum

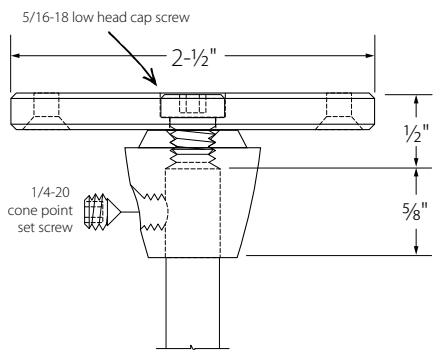

PART	CONNECTION	LENGTH	ROD SIZE
EZ-A31	top mount	1-1/8"	3/8"

- Installation hardware included
 - (3) Oval head screw (HD-PS2)
- Assembly hardware included
 - (1) Low head socket cap screw (HD-LHD65)
 - (1) Cone point socket set screw (HD-CP75)




EZ-A31
(Top mount)



EZ 1/4" ROD BOTTOM TURNBUCKLE
MOUNT WITH BASE PLATE

Aluminum

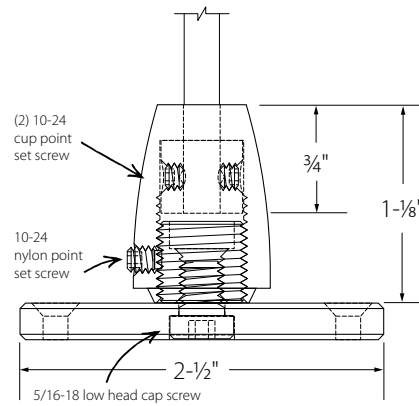

PART	CONNECTION	LENGTH	ROD SIZE
EZ-A30	bottom mount	1-5/8"	1/4"

- Installation hardware included
 - (3) Oval head screw (HD-PS2)
- Assembly hardware included
 - (1) Low head socket cap screw (HD-LHD7)
 - (2) Cup point socket set screw (HD-S1)
 - (1) Nylon tip set screw (HD-NT1)
- Note
 - 1/4" Aluminum rod is flexible and intended to span short distances




EZ-A30
(Bottom mount)



EZ 3/8" ROD BOTTOM TURNBUCKLE
MOUNT WITH BASE PLATE

Aluminum

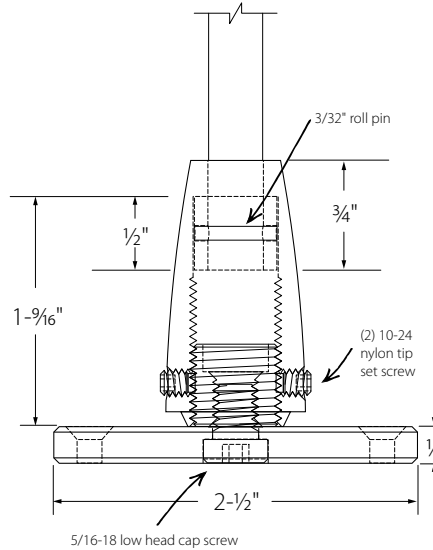

PART	CONNECTION	LENGTH	ROD SIZE
EZ-AH32	bottom mount	2-1/16"	3/8"


- Installation hardware included
 - (3) Oval head screw (HD-PS2)
- Assembly hardware included
 - (1) Low head socket cap screw (HD-LHD7)
 - (1) 3/32" roll pin (HD-332RP)
 - (2) Nylon tip socket set screw (HD-NT1)

Note

- For precise placement of roll pin hole, use rod drilling jig (HD-A375RDJ). See page HD:15




EZ-AH32
(Bottom mount)

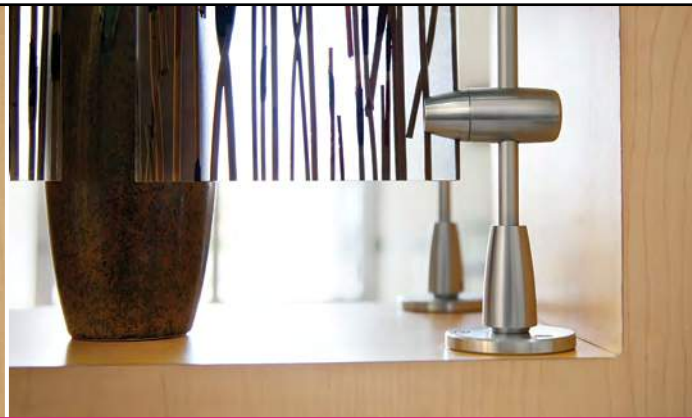

EZ 1/4" ROD HINGED TOP WALL MOUNT WITH BASE PLATE

Aluminum

PART	CONNECTION	℄ HINGE TO END	ROD SIZE
EZ-A21	top mount	1-5/8"	1/4"

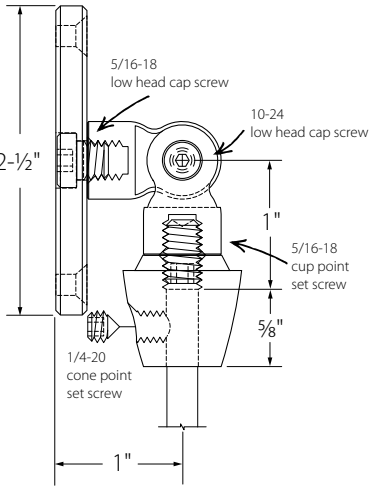


- Installation hardware included**
- (3) Oval head screw (HD-PS2)
- Assembly hardware included**
- (1) Low head socket cap screw (HD-LHD65)
 - (1) Low head socket cap screw (HD-LHD2)
 - (1) Cup point socket set screw (HD-S16)
 - (1) Cone point socket set screw (HD-CP75)

EZ 1/4" ROD HINGED BOTTOM WALL MOUNT WITH BASE PLATE

Aluminum

PART	CONNECTION	℄ HINGE TO END	ROD SIZE
EZ-A22	bottom mount	2-1/8"	1/4"

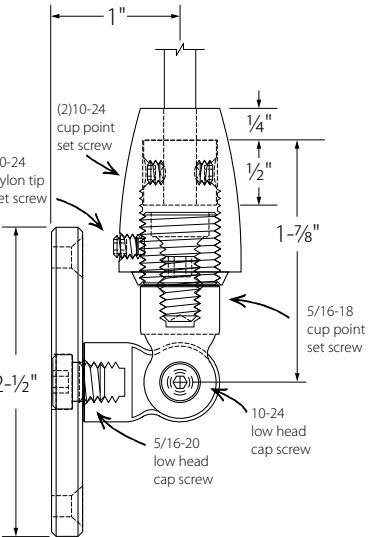


- Installation hardware included**
- (3) Oval head screw (HD-PS2)
- Assembly hardware included**
- (1) Low head socket cap screw (HD-LHD65)
 - (1) Low head socket cap screw (HD-LHD2)
 - (1) Cup point socket set screw (HD-S16)
 - (2) Cup point socket set screw (HD-S1)
 - (1) Nylon tip socket set screw (HD-NT1)

EZ 3/8" ROD HEAVY HINGED WALL MOUNT WITH BASE PLATE

Aluminum

PART	CONNECTION	℄ HINGE TO END	ROD SIZE
EZ-AH24	top and bottom mount	2-9/16"	3/8"

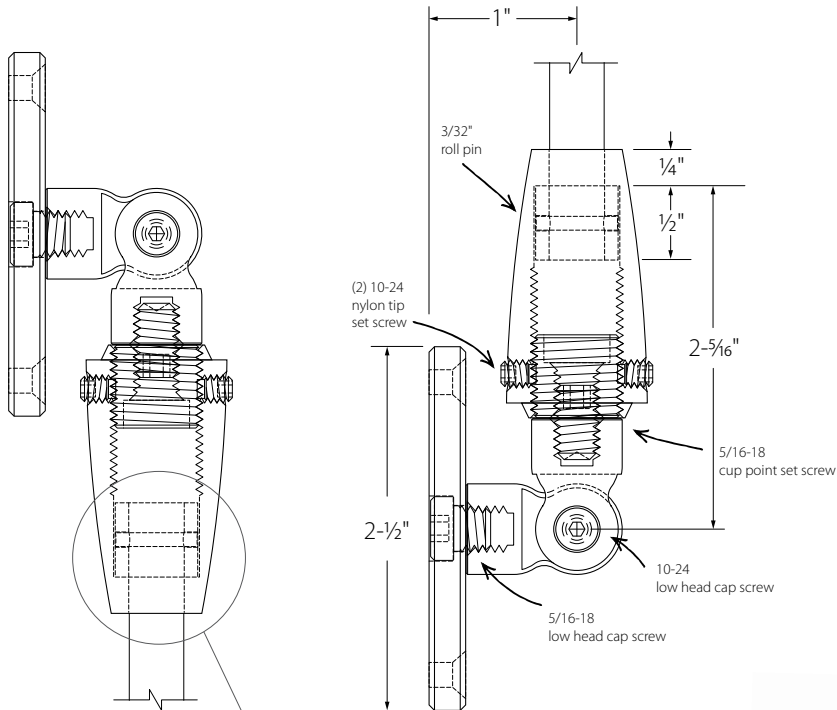


- Note**
- Heavy duty mounting option. Use the EZ-AH24 for a heavy duty top mount. This is sold unassembled so the rod terminator can be fixed during field installation

- Installation hardware included**
- (3) Oval head screw (HD-PS2)
- Assembly hardware included**
- (1) Heavy connection roll pin (HD-332RP)
 - (1) 3/8" rod terminator (EZ-AHRT-375)
 - (1) Low head socket cap screw (HD-LHD65)
 - (1) Low head socket cap screw (HD-LHD2)
 - (1) Cup point socket set screw (HD-S16)
 - (1) Nylon tip socket set screw (HD-NT1)

Note

- For precise placement of roll pin hole, use rod drilling jig (HD-A375RDJ). See page HD:15

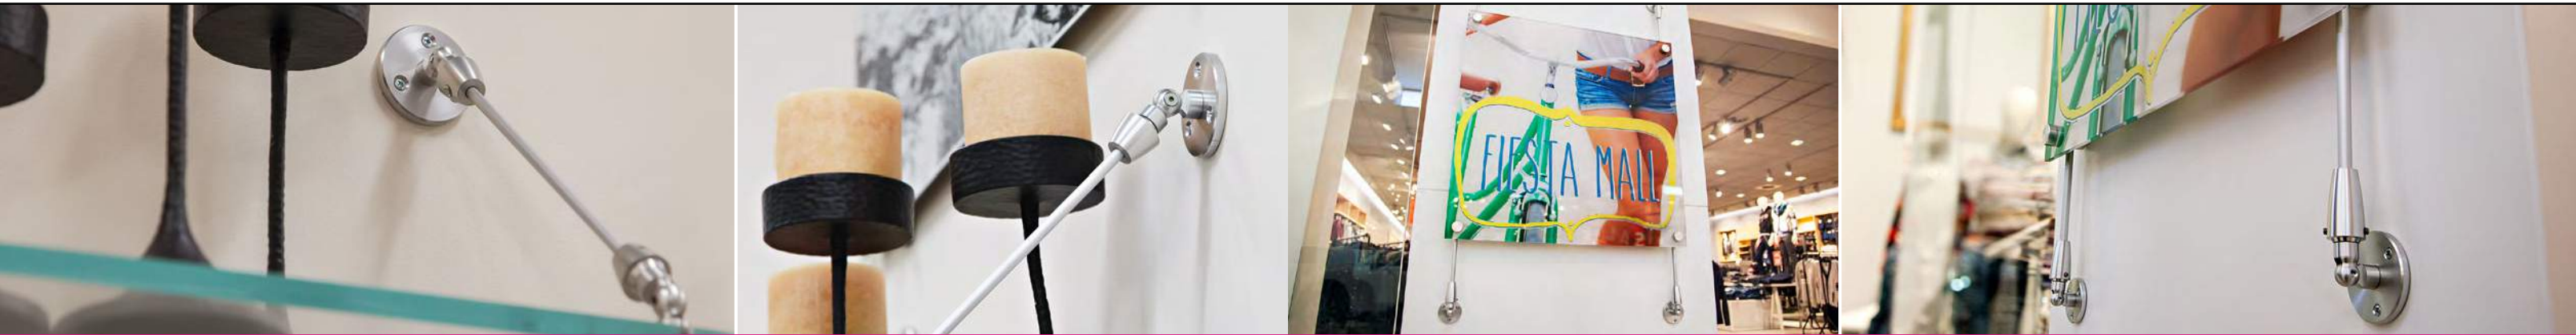


EZ 1/4" ROD 90° WALL CONNECTOR
WITH BASE PLATE
Aluminum

PART	CONNECTION	ROD SIZE
EZ-A36-R250	top and bottom mount	1/4"

- **Installation hardware included**
 - (3) Oval head screw (HD-PS2)
- **Assembly hardware included**
 - (1) Low head socket cap screw (HD-LHD65)
 - (2) Flat point socket set screw (HD-FPT4)



EZ-A36-R250
(Top & bottom mount)

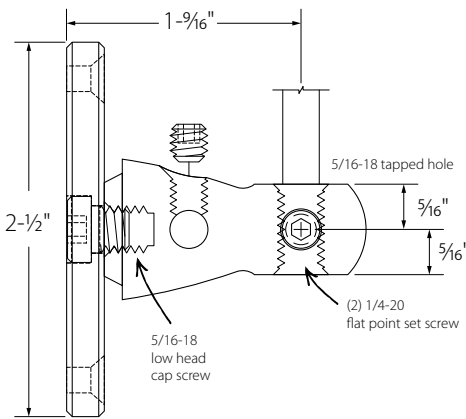


EZ 3/8" ROD 90° WALL CONNECTOR
WITH BASE PLATE
Aluminum

PART	CONNECTION	ROD SIZE
EZ-A36-R375	top and bottom mount	3/8"

- **Installation hardware included**
 - (3) Oval head screw (HD-PS2)
- **Assembly hardware included**
 - (1) Low head socket cap screw (HD-LHD65)
 - (2) Flat point socket set screw (HD-FPT4)




EZ-A36-R375
(Top & bottom mount)

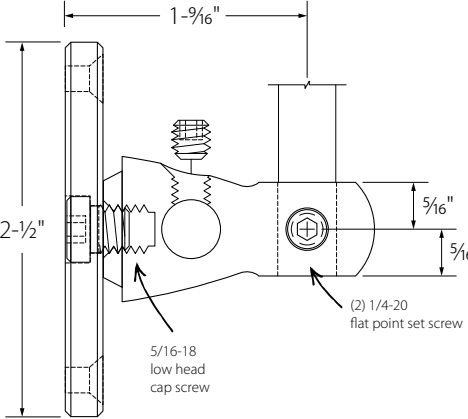

EZ 1/4" ROD CONNECTOR
WITH SINGLE SHELF OR
PANEL GRIPPER


Aluminum

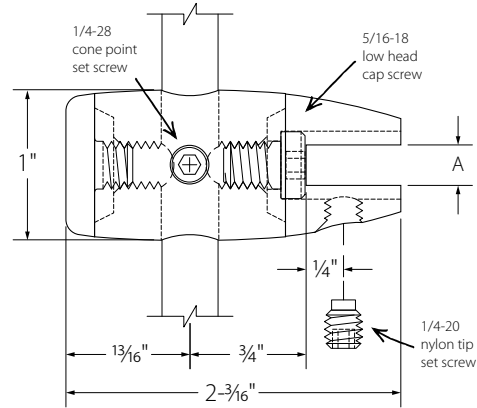

- Assembly hardware included**
- (1) Cone point socket set screw (HD-CP7)
 - (1) Low head socket cap screw (HD-LHD7)
 - EZ-A9-125R, EZ-A9-250R
 - (1) Nylon tip socket set screw (HD-NT4)
 - EZ-A9-375R, EZ-A9-500R, EZ-A9-750R
 - (1) Nylon tip socket set screw (HD-NT3)
- Note**
- Grippers rotate and can be fixed at any angle

EZ 1/4" ROD CONNECTOR
WITH DOUBLE SHELF OR
PANEL GRIPPER


Aluminum

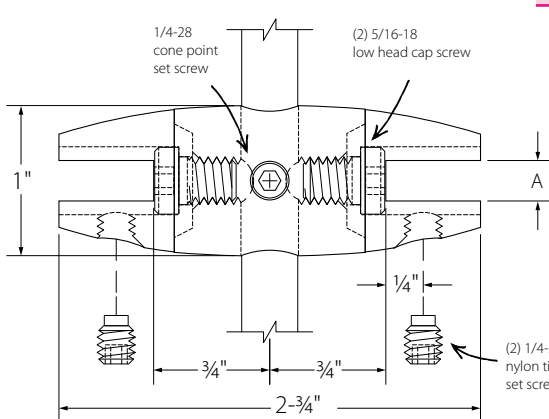

- Assembly hardware included**
- (1) Cup point socket set screw (HD-CP7)
 - (2) Low head socket cap screw (HD-LHD7)
 - EZ-A10-125R, EZ-A10-250R
 - (2) Nylon tip socket set screw (HD-NT4)
 - EZ-A10-375R, EZ-A10-500R, EZ-A10-750R
 - (2) Nylon tip socket set screw (HD-NT3)
- Note**
- Grippers rotate and can be fixed at any angle

EZ 3/8" ROD CONNECTOR
WITH SINGLE SHELF OR
PANEL GRIPPER


Aluminum

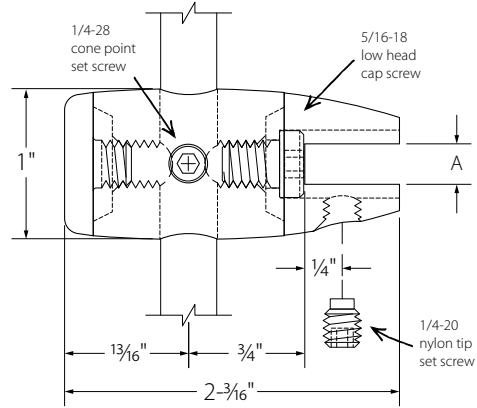


- Assembly hardware included**
- (1) Cone point socket set screw (HD-CP7)
 - (1) Low head socket cap screw (HD-LHD7)
 - EZ-A13-125R, EZ-A13-250R
 - (1) Nylon tip socket set screw (HD-NT4)
 - EZ-A13-375R, EZ-A13-500R, EZ-A13-750R
 - (1) Nylon tip socket set screw (HD-NT3)
- Note**
- Grippers rotate and can be fixed at any angle

EZ 3/8" ROD CONNECTOR
WITH DOUBLE SHELF OR
PANEL GRIPPER


Aluminum

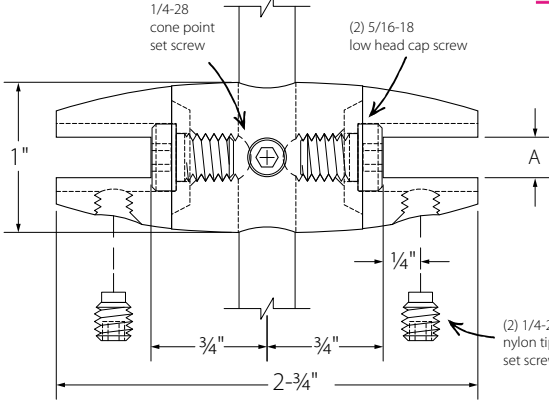

- Assembly hardware included**
- (1) Cone point socket set screw (HD-CP7)
 - (2) Low head socket cap screw (HD-LHD7)
 - EZ-A14-125R, EZ-A14-250R
 - (2) Nylon tip socket set screw (HD-NT4)
 - EZ-A14-375R, EZ-A14-500R, EZ-A14-750R
 - (2) Nylon tip socket set screw (HD-NT3)
- Note**
- Grippers rotate and can be fixed at any angle

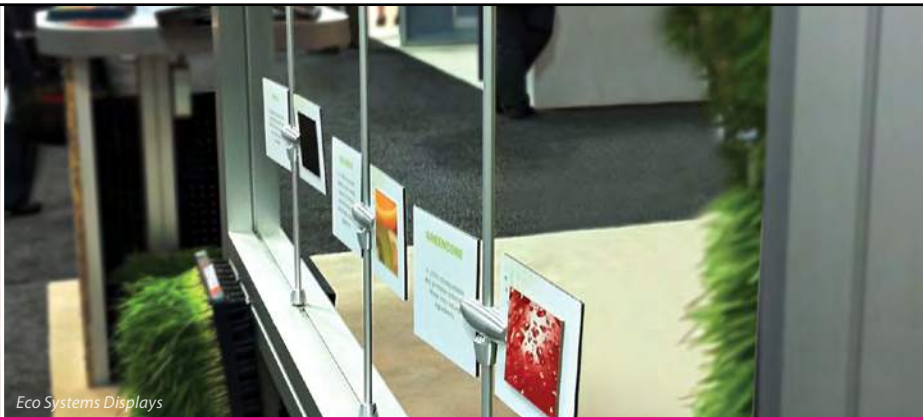

EZ 5/8" ROD CONNECTOR
WITH SINGLE THRU-HOLE
SHELF OR PANEL GRIPPER
Aluminum

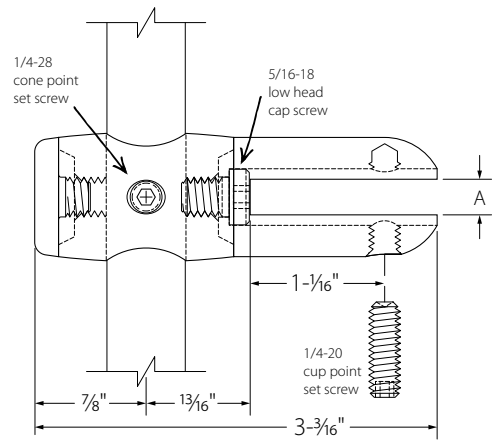

- **Assembly hardware included**
 - (1) Cone point socket set screw (HD-CP7)
 - (1) Low head socket cap screw (HD-LHD7)
 - (1) Cup point socket set screw (HD-S105)
- **Note**
 - Grippers rotate and can be fixed at any angle




EZ ROD
Aluminum



PART	ROD SIZE	INTERNAL DIA.	STANDARD LENGTH
EZ-ROD250	1/4"	—	8' or 12'
EZ-ROD375	3/8"	—	8' or 12'
EZ-ROD625	5/8"	1/4"	8' or 12'


- **Notes**
 - Cut rod to desired length at time of installation.
- EZ-ROD-625
 - Rod core can be tapped to 5/16-18

EZ 5/8" ROD CONNECTOR
WITH DOUBLE THRU-HOLE
SHELF OR PANEL GRIPPER
Aluminum

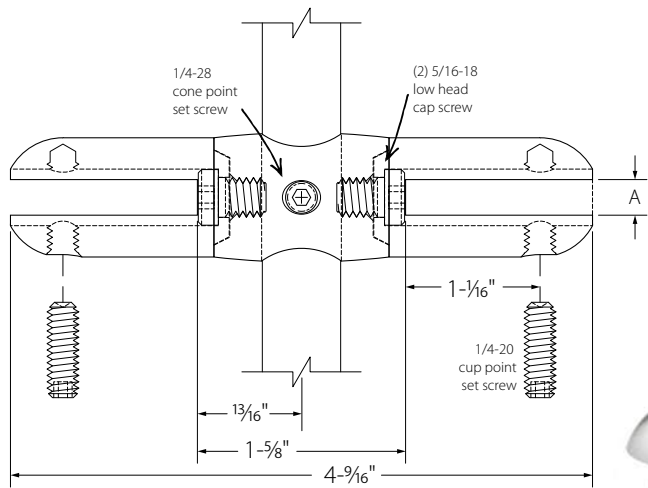

PART	HOLDS	SLOT OPENING (A)	LENGTH	ROD SIZE
EZ-A61-250	1/4"	.280"	4-9/16"	5/8"
EZ-A61-375	3/8"	.445"	4-9/16"	5/8"
EZ-A61-500	1/2"	.530"	4-9/16"	5/8"

- **Assembly hardware included**
 - (1) Cone point socket set screw (HD-CP7)
 - (2) Low head socket cap screw (HD-LHD7)
 - (2) Cup point socket set screw (HD-S105)
- **Note**
 - Grippers rotate and can be fixed at any angle
- **Tip**
 - For shelving, use a nylon tip set screw

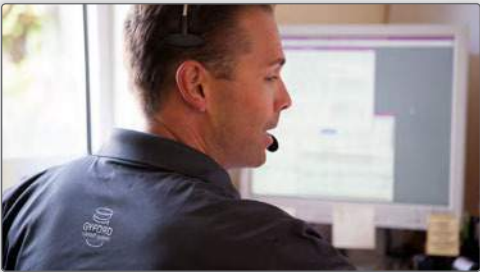


Our Customer Support Team is here to help

Call Us:
775.829.7272
Monday - Friday
7:00 a.m. - 3:30 p.m. (PST)


Email Us:
info@standoffsystems.com

- Full design support
- Installation guidance
- Free quotes
- Send us a sketch or .dwg

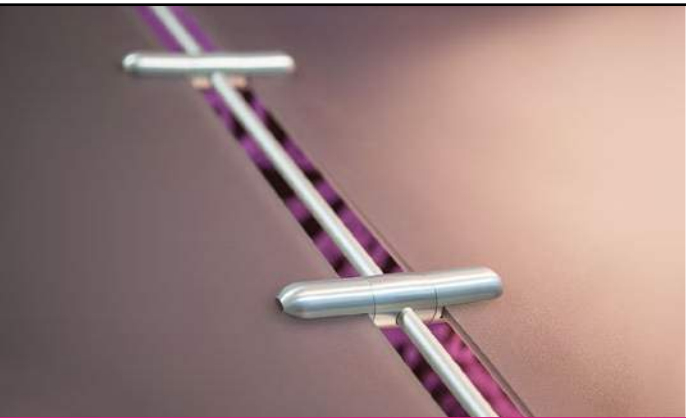

EZ 1/4" ROD VERTICAL
PANEL GRIPPER

Aluminum

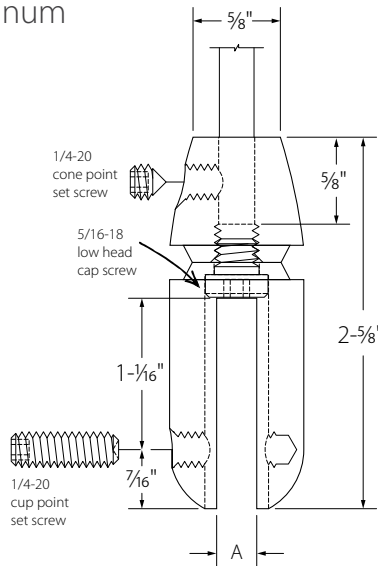


PART	HOLDS	SLOT OPENING (A)	LENGTH	ROD SIZE
EZ-A51-250	1/4"	.280"	2-5/8"	1/4"
EZ-A51-375	3/8"	.445"	2-5/8"	1/4"
EZ-A51-500	1/2"	.530"	2-5/8"	1/4"



- Assembly hardware included
- (1) Cone point socket set screw (HD-CP75)
 - (1) Low head socket cap screw (HD-LHD65)
 - (1) Cup point socket set screw (HD-S105)

EZ 3/8" ROD VERTICAL
PANEL GRIPPER

Aluminum

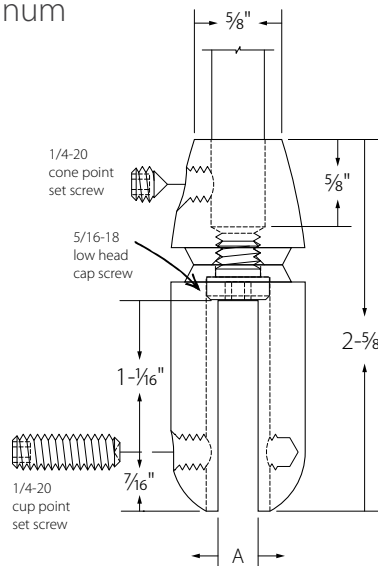

PART	HOLDS	SLOT OPENING (A)	LENGTH	ROD SIZE
EZ-A52-250	1/4"	.280"	2-5/8"	3/8"
EZ-A52-375	3/8"	.445"	2-5/8"	3/8"
EZ-A52-500	1/2"	.530"	2-5/8"	3/8"



- Assembly hardware included
- (1) Cone point socket set screw (HD-CP75)
 - (1) Low head socket cap screw (HD-LHD65)
 - (1) Cup point socket set screw (HD-S105)

EZ 3/8" ROD HEAVY
VERTICAL PANEL GRIPPER

Aluminum

PART	HOLDS	SLOT OPENING (A)	LENGTH	ROD SIZE
EZ-AH52-250	1/4"	.280"	2-5/8"	3/8"
EZ-AH52-375	3/8"	.445"	2-5/8"	3/8"
EZ-AH52-500	1/2"	.530"	2-5/8"	3/8"




Note

- Heavy duty mounting option. Use the EZ-AH52 for a heavy duty top mount. This is sold unassembled so the rod terminator can be fixed during field installation



- Note**
- For precise placement of roll pin hole, use rod drilling jig (HD-A375RDJ). See page HD:15

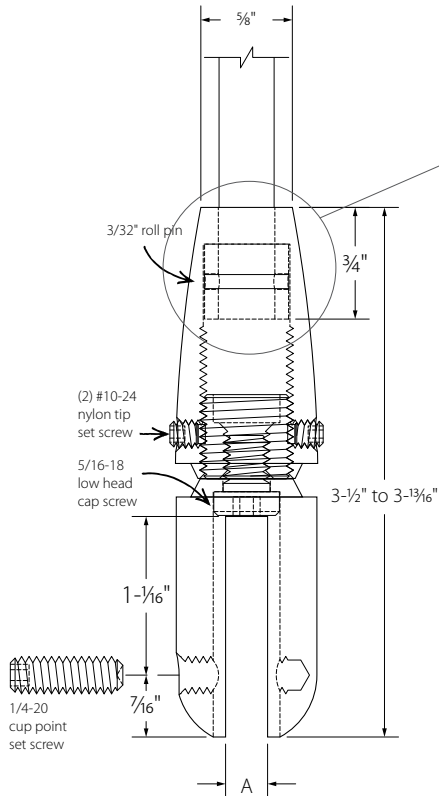

EZ-AH52-250
(For 1/4" material)



EZ-AH52-375
(For 3/8" material)




EZ-AH52-500
(For 1/2" material)



EZ ROD CONNECTOR WITH
STANDOFF CAP
Aluminum

PART	BACK TO C (A)	PANEL TO C (B)	DIA.	ROD SIZE
EZ-A55R	13/16"	5/8"	1"	1/4"
EZ-A56	13/16"	5/8"	1"	3/8"
EZ-A57	7/8"	11/16"	1"	5/8"

-  **Assembly hardware included**
- (1) Cone point socket set screw (HD-CP7)
 - (1) Threaded stud up to 1-1/2" long. Specify stud or material thickness. [See page HD:2](#)

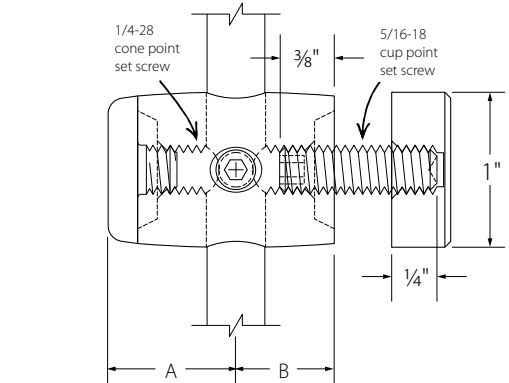


EZ 1/4" ROD CONNECTOR
WITH SADDLE GRIPPER
Aluminum

PART	HOLDS	SLOT OPENING (A)	SLOT TO C (B)	ROD SIZE
EZ-A12-125R	1/8"	.155"	1-1/16"	1/4"
EZ-A12-250R	1/4"	.265"	1"	1/4"
EZ-A12-375R	3/8"	.385"	15/16"	1/4"
EZ-A12-500R	1/2"	.515"	7/8"	1/4"

-  **Assembly hardware included**
- (1) StructureLite v-groove connector (SL-CP)
 - (1) Cone point socket set screw (HD-CP3)
 - (1) Cone point socket set screw (HD-CP7)
 - (1) Nylon tip socket set screw (HD-NT8)
 - (1) Nylon tip socket set screw (HD-NT7)
- [EZ-A12-125R, EZ-A12-250R](#)
- [EZ-A12-375R, EZ-A12-500R](#)

 **Note**

- Grippers rotate and can be fixed at any angle

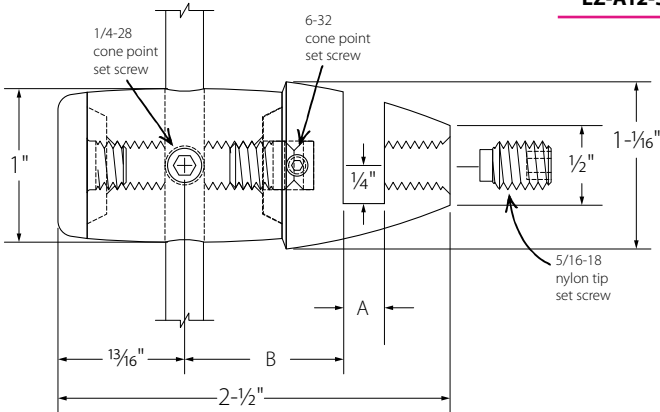


EZ 3/8" ROD CONNECTOR
WITH SADDLE GRIPPER
Aluminum

PART	HOLDS	SLOT OPENING (A)	SLOT TO C (B)	ROD SIZE
EZ-A16-125R	1/8"	.155"	1-1/16"	3/8"
EZ-A16-250R	1/4"	.265"	1"	3/8"
EZ-A16-375R	3/8"	.385"	15/16"	3/8"
EZ-A16-500R	1/2"	.515"	7/8"	3/8"

-  **Assembly hardware included**
- (1) StructureLite v-groove connector (SL-CP)
 - (1) Cone point socket set screw (HD-CP3)
 - (1) Cone point socket set screw (HD-CP7)
 - (1) Nylon tip socket set screw (HD-NT8)
 - (1) Nylon tip socket set screw (HD-NT7)
- [EZ-A16-125R, EZ-A16-250R](#)
- [EZ-A16-375R, EZ-A16-500R](#)

 **Note**

- Grippers rotate and can be fixed at any angle

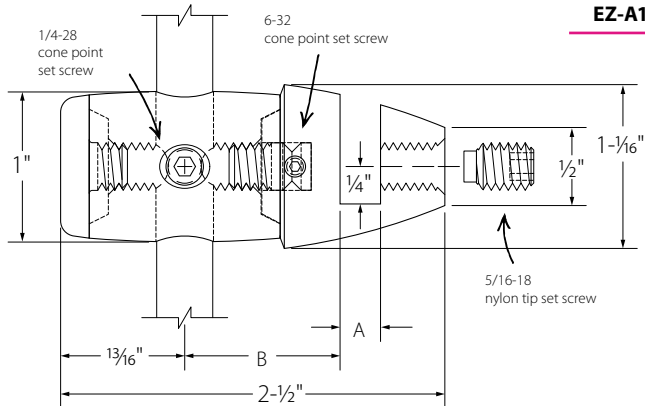



EZ 5/8" ROD CONNECTOR
WITH SADDLE GRIPPER
Aluminum

PART	HOLDS	SLOT OPENING (A)	SLOT TO C (B)	ROD SIZE
EZ-A62-125	1/8"	.155"	1-1/8"	5/8"
EZ-A62-250	1/4"	.265"	1-1/16"	5/8"
EZ-A62-375	3/8"	.385"	1"	5/8"
EZ-A62-500	1/2"	.515"	15/16"	5/8"


-  **Assembly hardware included**
- (1) StructureLite v-groove connector (SL-CP)
 - (1) Cone point socket set screw (HD-CP3)
 - (1) Cone point socket set screw (HD-CP7)
 - (1) Nylon tip socket set screw (HD-NT8)
 - (1) Nylon tip socket set screw (HD-NT7)
- [EZ-A62-125, EZ-A62-250](#)
- [EZ-A62-375, EZ-A62-500](#)

 **Note**

- Grippers rotate and can be fixed at any angle

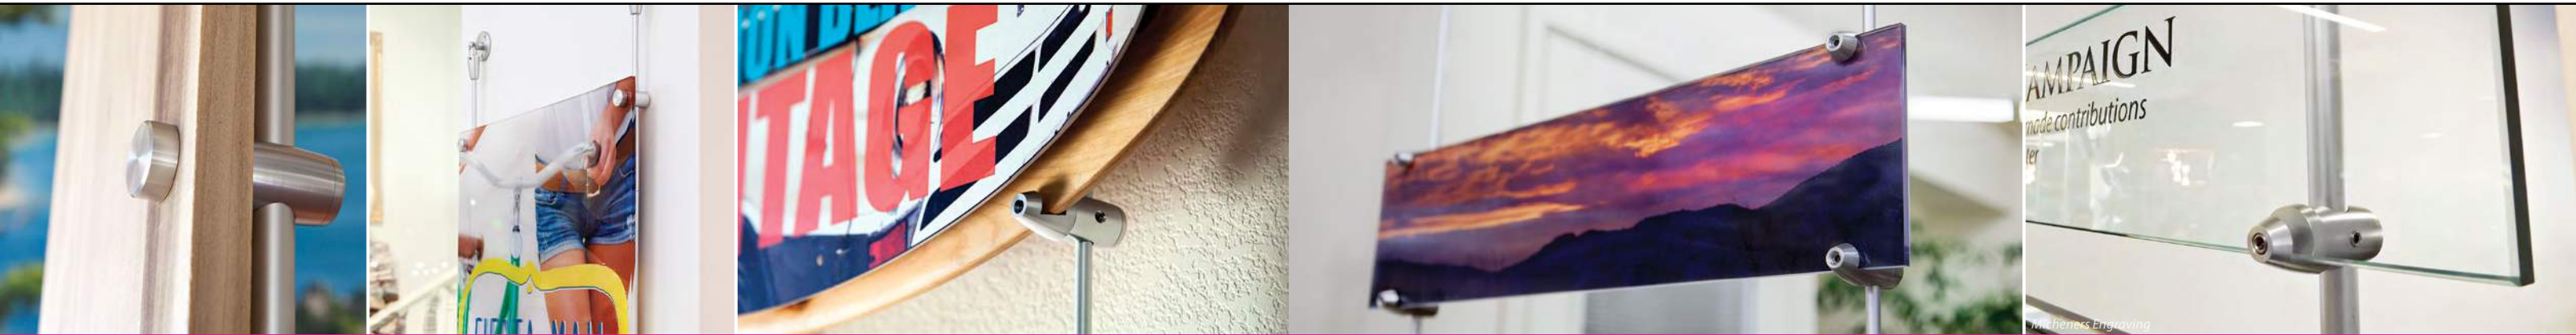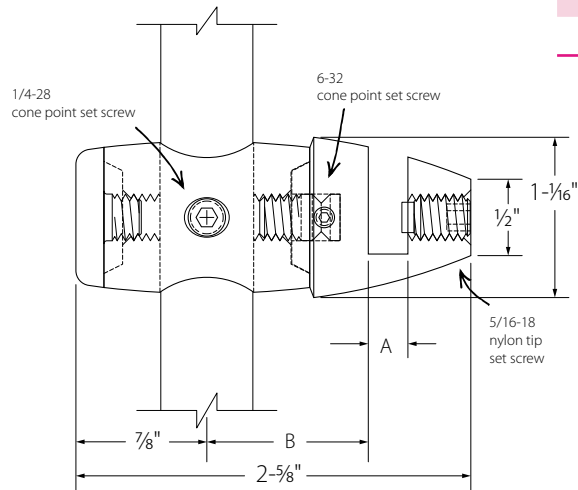


EZ FLOOR TO CEILING MOUNTED
WIRE SUSPENSION SYSTEM
Aluminum

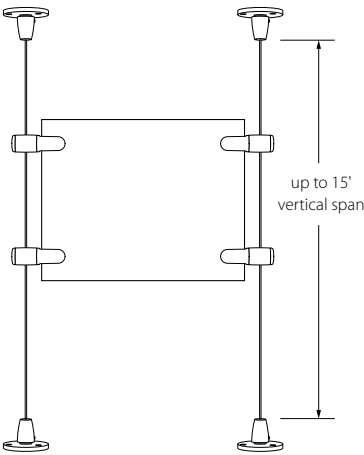

PART	WIRE SIZE	HOLDS
EZK-13	1/8"	3/8"
EZK-14	1/8"	1/2"

- Installation hardware included**
- (12) Oval head screw (HD-PS2)
- Assembly hardware included**
- (2) 15' 3/64" swaged wire lengths (EZ-AWIRE15)
 - (2) EZ Heavy Top Mounts (EZ-AH28PO)
 - (2) EZ Bottom Mounts (WL-A28)
 - (1) 1" Plastic Tubing (HD-PT2)
- EZK-13**
- (4) EZ Vertical Gripper (EZ-A58-375)
- EZK-14**
- (4) EZ Vertical Gripper (EZ-A58-500)

EZ CEILING MOUNTED
WIRE SUSPENSION SYSTEM
Aluminum

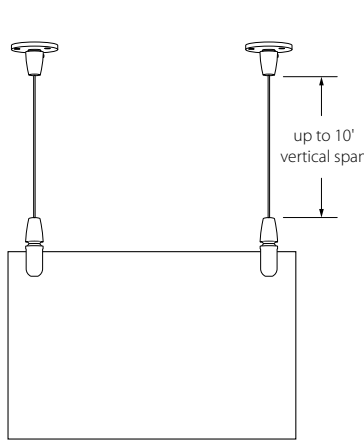

PART	WIRE SIZE	HOLDS
EZK-15	1/8"	3/8"
EZK-16	1/8"	1/2"

- Installation hardware included**
- (6) Oval head screw (HD-PS2)
- Assembly hardware included**
- (2) 10' 3/64" swaged wire lengths (EZ-AWIRE10)
 - (2) EZ Heavy Top Mounts (EZ-AH28PO)
 - (1) 1" Plastic Tubing (HD-PT2)
- EZK-15**
- (2) EZ Heavy Vertical Gripper (EZ-AH43-375PO)
- EZK-16**
- (2) EZ Heavy Vertical Gripper (EZ-AH43-500PO)

EZ INDIVIDUAL AND REPLACEMENT PARTS
Visit our website for product specifications

EZ GRIPPERS

STANDARD GRIPPERS

-  **EZ-AG-125**
For 1/8" material
-  **EZ-AG-250**
For 1/4" material
-  **EZ-AG-375**
For 3/8" material
-  **EZ-AG-500**
For 1/2" material
-  **EZ-AG-750**
For 3/4" material

SADDLE GRIPPERS

-  **EZ-ASG-125**
For 1/8" material
-  **EZ-ASG-250**
For 1/4" material
-  **EZ-ASG-375**
For 3/8" material
-  **EZ-ASG-500**
For 1/2" material

THRU-HOLE GRIPPERS

-  **EZ-AGRIP-250**
For 1/4" material
-  **EZ-AGRIP-375**
For 3/8" material
-  **EZ-AGRIP-500**
For 1/2" material

BASE PLATES

-  **EZ-A2.5WMBL**
Base plate with counterbore hole
-  **EZ-A2.5WMBT**
Base plate with 5/16-18 tapped hole

HINGES

-  **EZ-AHC**
Hinge Assembly
-  **EZ-AHF**
Female component
-  **EZ-HM**
Male component

PULLEY WHEEL PARTS

-  **EZ-PW**
Pulley wheel
-  **EZ-APGRIP**
Pulley gripper

ROD CONNECTORS

-  **EZ-A250C**
For 1/4" rod
-  **EZ-A375C**
For 3/8" rod
-  **EZ-A625C**
For 5/8" rod



EZ INDIVIDUAL AND REPLACEMENT PARTS

Visit our website for product specifications

ROD GRIPPERS

- 

EZ-ARG-250
For 1/4" rod
- 

EZ-ARG-375
For 3/8" rod
- 

EZ-ASRG-250
For 1/4" rod
- 

EZ-ASRG-375
For 3/8" rod
- 

EZ-QC-375
For 3/8" rod

ROD TURNBUCKLES

- 

EZ-ATR-250
For 1/4" rod
- 

EZ-AHR-375
For 3/8" rod

5/8" ROD TRAVELERS

- 

EZ-A625RE
5/8" rod end
- 

EZ-A625RC
5/8" rod traveler
- 

EZ-A625TC
5/8" rod t-connector
- 

EZ-A625BT
5/8" rod 5-way traveler
- 

EZ-A625BTM
5/8" rod 5-way threaded traveler

SHELVING & CONNECTION COMPONENTS

- 

EZ-A125WHW
1/8" wire hub (see page SL:14)
- 

EZ-SP1
Spacer
- 

EZ-PFC
Press-fit connector

FINISHING COMPONENTS

- 

EZ-CRCAP
Finishing cap
- 

EZ-GC
Gripper Cap

TERMINATORS

- 

EZ-ART-250
1/4" rod terminator
- 

EZ-AHRT-375
3/8" rod terminator
- 

EZ-AWT-125
EZ 1/8 wire terminator

TRANSITION CONNECTORS

- 

EZ-ATC-250A
5/16-18 thread to 1/4" rod
- 

EZ-ATC-250B
3/8" rod to 1/4" rod

EZ INDIVIDUAL AND REPLACEMENT PARTS

Visit our website for product specifications

TURNBUCKLE COMPONENTS

- 

HD-A375RDJ
3/8" rod drilling jig
- 

EZ-HTM
Long turnbuckle connection
- 

EZ-TMS
Standard turnbuckle connection
- 

EZ-HW-125
EZ 1/8" Wire Stopper

WIRE GRIPPERS

- 

EZ-AWG-125
For 1/8" wire

WIRE CONNECTORS

- 

EZ-A125C
For 1/8" wire
- 

EZ-AHWC2R
For 1/8" wire
- 

EZ-AHWC3
For 1/8" wire

WIRE TURNBUCKLES

- 

EZ-ATW-125
For 1/8" wire
- 

EZ-ATL-125
For 1/8" wire
- 

EZ-AHW-125PO
For 1/8" wire
- 

EZ-AHT-125PO
For 1/8" wire
- 

EZ-AHW-125PO
(1/8" wire)
- 



EZ-AHT-125PO
(1/8" wire)



Inspirational Photo Galleries
www.standoffsystems.com/photo-gallery

- Signage/Awards
- Interior Design/Construction
- Shelving/Displays
- Art/Framing
- Retail/POP
- Exhibits/Museums





EZ ROD & WIRE INDEX

 EZ:2	 EZ:2	 EZ:3	 EZ:4	 EZ:4	 EZ:5
 EZ:6	 EZ:6		 EZ:7	 EZ:8	
 EZ:8	 EZ:9		 EZ:9	 EZ:10	
 EZ:10	 EZ:11	 EZ:11	 EZ:12	 EZ:12	 EZ:13
 EZ:13	 EZ:14	 EZ:15	 EZ:16	 EZ:16	 EZ:17

1	EZ 1/8" Wire Top Mount with Base Plate EZ-A27	EZ:2	14	EZ 1/8" Wire Single Gripper EZ-A5-125R, EZ-A5-250R, EZ-A5-375R, EZ-A5-500R, EZ-A5-750R	EZ:10
2	EZ 1/8" Wire Bottom Turnbuckle with Base Plate EZ-A28	EZ:2	15	EZ 1/8" Wire Double Panel Gripper EZ-A6-125R, EZ-A6-250R, EZ-A6-375R, EZ-A6-500R, EZ-A6-750R	EZ:10
3	EZ 1/8" Wire Heavy Top Mount Turnbuckle with Base Plate* EZ-AH28PO	EZ:3	16	EZ 1/8" Wire Thru-bolt Gripper EZ-A58-250, EZ-A58-375, EZ-A58-500	EZ:11
4	EZ 1/8" Wire Hinged Mount with Base Plate EZ-A19	EZ:4	17	EZ 1/8" Wire Double Panel Thru-bolt Gripper EZ-A59-250, EZ-A59-375, EZ-A59-500	EZ:11
5	EZ 1/8" Wire Hinged Bottom Turnbuckle with Base Plate EZ-A20	EZ:4	18	EZ 1/8" Wire Vertical Panel Gripper EZ-AVGC-250, EZ-AVGC-375, EZ-AVGC-500	EZ:12
6	EZ 1/8" Wire Heavy Hinged Turnbuckle with Base Plate* EZ-AH20PO	EZ:5	19	EZ 1/8" Wire Horizontal Shelf Gripper EZ-AHGC-250, EZ-AHGC-375, EZ-AHGC-500	EZ:12
7	EZ 1/8" Wire 90° Wall Mount with Base Plate EZ-A33-W125	EZ:6	20	EZ 1/8" Wire Vertical Double Panel Gripper EZ-AVDG-250, EZ-AVDG-375	EZ:13
8	EZ 1/8" Wire 90° Bottom Wall Mount with Base Plate EZ-A34-W125	EZ:6	21	EZ 1/8" Wire Horizontal Double Shelf Gripper EZ-AHDG-375, EZ-AHDG-500	EZ:13
9	EZ 1/8" Wire 90° Wall Mount with Base Plate* EZ-AH33-W125PO	EZ:7	22	EZ 1/8" Wire Vertical Panel Gripper EZ-A43-250, EZ-A43-375, EZ-A43-500	EZ:14
10	EZ 1/8" Wire Heavy Angled Surface Top Mount EZ-APCA	EZ:8	23	EZ 1/8" Wire Vertical Heavy Panel Gripper* EZ-AH43-250PO, EZ-AH43-375PO, EZ-AH43-500PO	EZ:15
11	EZ 1/8" Wire Heavy Angled Surface Top Mount with Base Plate EZ-A53	EZ:8	24	EZ 1/8" Wire Connector with Cap EZ-A50	EZ:16
12	EZ 1/8" Wire (By the Foot) EZ-WIRE-125	EZ:9	25	EZ 1/8" Wire Saddle Gripper EZ-A8-125R, EZ-A8-250R, EZ-A8-375R, EZ-A8-500R	EZ:16
13	EZ 1/8" Swaged Wire Packs EZ-AWIRE10, EZ-AWIRE15	EZ:9	26	EZ 1/8" Wire Pulley Wheel with Base Plate EZ-APW	EZ:17

*Parts are shipped unassembled


EZ ROD & WIRE INDEX

 EZ:17	 EZ:18	 EZ:20	 EZ:20	 EZ:21	 EZ:22
 EZ:22	 EZ:23			 EZ:23	 EZ:24
 EZ:24	 EZ:25			 EZ:26	 EZ:27
 EZ:28	 EZ:28	 EZ:29	 EZ:29	 EZ:30	 EZ:30
 EZ:30	 EZ:30	 EZ:31	 EZ:32	 EZ:32	 EZ:33

27	EZ 1/8" Wire Flying Turnbuckle EZ-AH45PO	EZ:17	40	EZ 3/8" Rod 90 Degree Wall Connector with Base Plate EZ-A36-R375	EZ:27
28	EZ 1/8" Wire Spreader Bar EZ-A46, EZ-A47, EZ-A48, EZ-A63, EZ-A64, EZ-A65	EZ:18	41	EZ 1/4" Rod Connector with Single Shelf or Panel Gripper EZ-A9-125R, EZ-A9-250R, EZ-A9-375R, EZ-A9-500R, EZ-A9-750R	EZ:28
29	EZ 1/8" Wire Shelf Hub EZ-A40	EZ:20	42	EZ 3/8" Rod Connector with Single Shelf or Panel Gripper EZ-A13-125R, EZ-A13-250R, EZ-A13-375R, EZ-A13-500R, EZ-A13-750R	EZ:28
30	EZ 1/8" Wire Angled Panel Connector EZ-A44	EZ:20	43	EZ 1/4" Rod Connector with Double Shelf or Panel Gripper EZ-A10-125R, EZ-A10-250R, EZ-A10-375R, EZ-A10-500R, EZ-A10-750R	EZ:29
31	EZ Panel Gripper with Base Plate EZ-A41-250, EZ-A41-375, EZ-A41-500	EZ:21	44	EZ 3/8" Rod Connector with Double Shelf or Panel Gripper EZ-A14-125R, EZ-A14-250R, EZ-A14-375R, EZ-A14-500R, EZ-A14-750R	EZ:29
32	EZ 1/4" Rod Top Mount with Base Plate EZ-A29	EZ:22	45	EZ 5/8" Rod Connector with Single Thru-bolt Shelf or Panel Gripper EZ-A60-250, EZ-A60-375, EZ-A60-500	EZ:30
33	EZ 1/4" Rod Bottom Turnbuckle Mount with Base Plate EZ-A30	EZ:22	46	EZ 1/4" Rod EZ-ROD250	EZ:30
34	EZ 3/8" Rod Top Mount with Base Plate EZ-A31	EZ:23	47	EZ 3/8" Rod EZ-ROD375	EZ:30
35	EZ 3/8" Rod Bottom Turnbuckle Mount with Base Plate EZ-AH32	EZ:23	48	EZ 5/8" Rod EZ-ROD625	EZ:30
36	EZ 1/4" Rod Hinged Top Wall Mount with Base Plate EZ-A21	EZ:24	49	EZ 5/8" Rod Connector with Double Thru-bolt Shelf or Panel Gripper EZ-A61-250, EZ-A61-375, EZ-A61-500	EZ:31
37	EZ 1/4" Rod Hinged Bottom Wall Mount with Base Plate EZ-A22	EZ:24	50	EZ 1/4" Rod Vertical Panel Gripper EZ-A51-250, EZ-A51-375, EZ-A51-500	EZ:32
38	EZ 3/8" Rod Heavy Hinged Wall Mount with Base Plate EZ-AH24	EZ:25	51	EZ 3/8" Rod Vertical Panel Gripper EZ-A52-250, EZ-A52-375, EZ-A52-500	EZ:32
39	EZ 1/4" Rod 90° Wall Connector with Base Plate EZ-A36-R250	EZ:26	52	EZ 3/8" Rod Heavy Vertical Panel Gripper* EZ-AH52-250, EZ-AH52-375, EZ-AH52-500	EZ:33



*Parts are shipped unassembled

EZ ROD & WIRE INDEX

					
EZ:34	EZ:34	EZ:34	EZ:34	EZ:35	EZ:35
					
EZ:36	EZ:36	EZ:37	EZ:37	EZ:37	EZ:37
					
EZ:37	EZ:37	EZ:37	EZ:37	EZ:37	EZ:37
					
EZ:37	EZ:37	EZ:37	EZ:38	EZ:38	EZ:38
					
EZ:38	EZ:38	EZ:38	EZ:38	EZ:38	EZ:38

53	EZ 1/4" Rod Connector with Standoff Cap EZ-A55R	EZ:34	68	EZ Hinge Male Component EZ-HM	EZ:37
54	EZ 3/8" Rod Connector with Standoff Cap EZ-A56	EZ:34	69	EZ 1/8" Wire Pulley Wheel EZ-PW	EZ:37
55	EZ 5/8" Rod Connector with Standoff Cap EZ-A57	EZ:34	70	EZ Pulley Grip EZ-APGRIP	EZ:37
56	EZ 1/4" Rod Connector with Saddle Gripper EZ-A12-125R, EZ-A12-250R, EZ-A12-375R, EZ-A12-500R	EZ:34	71	EZ 1/4" Rod Connector EZ-A250C	EZ:37
57	EZ 3/8" Rod Connector with Saddle Gripper EZ-A16-125R, EZ-A16-250R, EZ-A16-375R, EZ-A16-500R	EZ:35	72	EZ 3/8" Rod Connector EZ-A375C	EZ:37
58	EZ 5/8" Rod Connector with Saddle Gripper EZ-A62-125, EZ-A62-250, EZ-A62-375, EZ-A62-500	EZ:35	73	EZ 5/8" Rod Connector EZ-A625C	EZ:37
59	EZ Floor to Ceiling Mounted Wire Suspension System EZK-13, EZK-14	EZ:36	74	EZ 3/8" Rod Thru-mount EZ-ARG-250, EZ-ARG-375	EZ:38
60	EZ Ceiling Mounted Wire Suspension System EZK-15, EZK-16	EZ:36	75	EZ 1/4" Rod Thru-mount EZ-ASRG-250, EZ-ASRG-375	EZ:38
61	EZ Shelf/Panel Gripper EZ-AG-125, EZ-AG-250, EZ-AG-375, EZ-AG-500, EZ-AG-750	EZ:37	76	EZ 3/8" Rod Holder EZ-QC-375	EZ:38
62	EZ Saddle Gripper EZ-ASG-125, EZ-ASG-250, EZ-ASG-375, EZ-ASG-500	EZ:37	77	EZ 1/4" Rod Bottom Turnbuckle Mount EZ-ATR-250	EZ:38
63	EZ Thru-bolt Panel Gripper EZ-AGRIP-250, EZ-AGRIP-375, EZ-AGRIP-500	EZ:37	78	EZ 3/8" Rod Heavy Turnbuckle Mount EZ-AHR-375	EZ:38
64	EZ Base Plate with Counterbore Thru-hole EZ-A2.5WMBL	EZ:37	79	EZ 5/8" Rod End EZ-A625RE	EZ:38
65	EZ Base Plate with 5/16-18 Tapped Hole EZ-A2.5WMBT	EZ:37	80	EZ 5/8" Rod Traveler EZ-A625RC	EZ:38
66	EZ Hinge Assembly EZ-AHC	EZ:37	81	EZ 5/8" Rod T-Connector EZ-A625TC	EZ:38
67	EZ Hinge Female Component EZ-AHF	EZ:37	82	EZ 5/8" Rod 5-Way Traveler EZ-A625BT	EZ:38

EZ ROD & WIRE INDEX

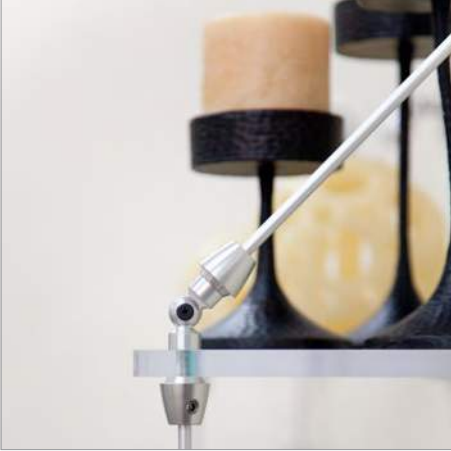					
EZ:38	EZ:38/SL:14	EZ:38/SO:8	EZ:38	EZ:38	EZ:38
					
EZ:38	EZ:38			EZ:38	EZ:38
					
EZ:38	EZ:39/159			EZ:39	EZ:39
					
EZ:39	EZ:39	EZ:39	EZ:39	EZ:39	EZ:39
					
EZ:39	EZ:39	EZ:39	EZ:39	EZ:39	EZ:39

83	EZ 5/8" Rod 5-Way Threaded Traveler EZ-A625BTM	EZ:38	96	EZ Turnbuckle Connection EZ-TMS	EZ:39
84	EZ 1/8" Wire 1-Way Hub EZ-A125WHW	EZ:38/SL:14	97	EZ 1/8" Wire Stopper EZ-HW-125	EZ:39
85	EZ 5/8" Spacer EZ-SP1	EZ:38/SO:8	98	EZ 1/8" Wire Gripper EZ-AWG-125	EZ:39
86	EZ Press-fit Connector EZ-PFC	EZ:38	99	EZ 1/8" Wire Bottom Turnbuckle EZ-ATW-125	EZ:39
87	EZ Finishing Cap EZ-CRCAP	EZ:38	100	EZ 1/8" Wire Bottom Long Turnbuckle EZ-ATL-125	EZ:39
88	EZ Gripper Cap EZ-GC	EZ:38	101	EZ 1/8" Wire Heavy Turnbuckle EZ-AHW-125	EZ:39
89	EZ 1/4" Rod Terminator EZ-ART-250	EZ:38	102	EZ 1/8" Wire Heavy Long Top Turnbuckle EZ-AHT-125	EZ:39
90	EZ 3/8" Rod Terminator EZ-AHRT-375	EZ:38	103	EZ 1/8" Wire Heavy Turnbuckle* EZ-AHW-125PO	EZ:39
91	EZ 1/8" Wire Terminator EZ-AWT-125	EZ:38	104	EZ 1/8" Wire Heavy Long Turnbuckle* EZ-AHT-125PO	EZ:39
92	EZ 1/4" Rod Transition Connector EZ-ATC-250A	EZ:38	105	EZ 1/8" Wire Inline Connector EZ-A125C	EZ:39
93	EZ 3/8" to 1/4" Rod Transition Connector EZ-ATC-250B	EZ:38	106	EZ 1/8" Wire Connector Type 2 (Slotted) EZ-AHWC2R	EZ:39
94	3/8" Rod Drilling Jig HD-A375RDJ	EZ:39/HD:15	107	EZ 1/8" Wire Connector Type 3 (Finished End) EZ-HWC3	EZ:39
95	EZ Long Turnbuckle Connection EZ-HTM	EZ:39			

*Parts are shipped unassembled

*Parts are shipped unassembled

StructureLite

StructureLite Extrusion	SL:2
StructureLite Blox™ Components	SL:6
StructureLite Extrusion Inserts	SL:8
StructureLite 2.5" H-Tube Components	SL:10
StructureLite C-Channel Components	SL:11
StructureLite Extrusion Connectors	SL:12
StructureLite Finishing Options	SL:16
StructureLite Plates and Feet	SL:18
StructureLite Kits	SL:19
StructureLite Individual & Replacement Parts	SL:19
StructureLite Index	SL:20



StructureLite is designed for structures created with extrusion profile. You can create your own furniture, shelving, displays, partitions, exhibits and other interior or architectural elements with this customizable collection of components.


EXTRUSION
Aluminum

PART	SLOT (A)	SLOT DEPTH (B)	INSIDE DIA.	OUTSIDE DIA.	STANDARD LENGTH
SL-PROF	.35" to .38"	.38" to .39"	1/4"	1-1/4"	8' or 12'
SL-PROFD	(2) .35" to .38"	(2) .38" to .39"	1/4"	1-1/4"	12'
SL-PROF90	(2) .35" to .38"	(2) .38" to .39"	1/4"	1-1/4"	8' or 12'


-  **Notes**
- Cut to desired length at time of installation. Additional cut charges may apply
 - Center holes can be drilled and tapped for 5/16-18 threads




SL-PROF
(1 slot)

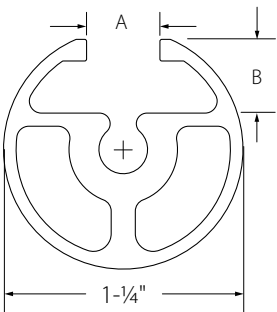


SL-PROFD
(2 slots)

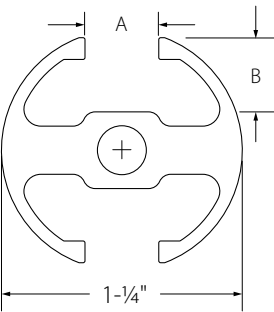


SL-PROF90
(2 slots at 90°)




SL-BAR
(no slot)



SL-2.5BAR
(2.5" extrusion)

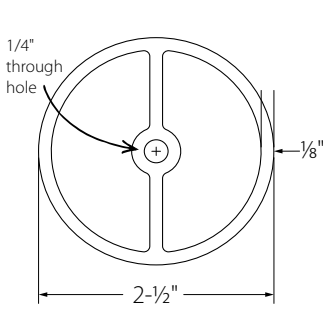

SL-2.5HTUBE
(thick-walled 2.5" extrusion)



-  **Tips**
- Combine with extrusion nuts to attach additional components. [See page SL:8](#)
 - Combine with inserts and covers for additional options. [See page SL:8](#)

-  **Tips**
- Combine with extrusion nuts to attach additional components. [See page SL:8](#)
 - Combine with inserts and covers for additional options. [See page SL:8](#)

-  **Tips**
- Combine with extrusion nuts to attach additional components. [See page SL:8](#)
 - Combine with inserts and covers for additional options. [See page SL:8](#)

-  **Tips**
- Center holes can be drilled and tapped for 5/16-18 threads.
 - Combine with 1.25" end cap (SL-2.5PCAP) for a finished option. [See page SL:17](#)

-  **Tips**
- Center holes can be drilled and tapped for 5/16-18 threads.
 - Combine with 2.5" end cap (SL-2.5PCAP) for a finished option. [See page SL:17](#)
 - Combine with 2.5" disc (SL-2.5DISC) as a finishing option, a transition component, or as a single mounting point. [See page SL:17](#)

-  **Tips**
- Combine with an Heavy Top Cap (SL-HTC) for a finished end. [See page SL:10](#)
 - Also sold drilled with a base mount (SL-A2.5HTUBE), for a bottom mounted option. [See page SL:10](#)



EXTRUSION

Aluminum


PART	SLOT (A)	SLOT DEPTH (B)	OUTSIDE WIDTH	STANDARD LENGTH
SL-WT	.35" to .38"	.38" to .39"	1-1/4"	8' or 12'
SL-C-CHANNEL	9/16"	1-3/4"	—	8'
SL-SQPROF	.35" to .38"	.38" to .39"	1-1/4"	12'

Note

- Cut to desired length at time of installation. Additional cut charges may apply




SL-WT
(Wall track)

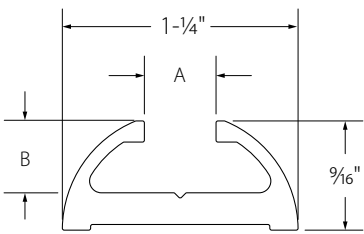

- Tips**
- Add an end cap (SL-AWTEC) to create a finished end. [See page SL:16](#)
 - Combine with extrusion nuts to attach additional components. [See page SL:8](#)
 - Use drill bit (HD-DRILLCS) to create mounting holes. [See page HD:14](#)




SL-C-CHANNEL
(Panel suspension)



- Tips**
- Combine with the C-Channel Installation Kit (SL-CHNLKIT) for panel suspension applications. [See page SL:11](#)
 - Use a C-Channel Cover (SL-CHNLCAP) for a finished look. [See page SL:11](#)
 - Use drill bits (HD-DRILLSTP) for mounting and (HD-DRILLP) for side-taps. [See page HD:14](#)



SL-SQPROF
(Single-slot)

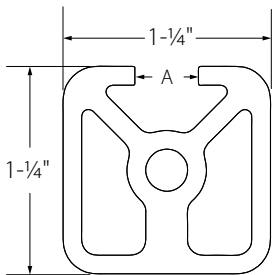

- Tips**
- Combine with inserts and covers for additional options. [See page SL:8](#)
 - Use a Square End Cover (SL-BLOX1.25EC) for a finished look. [See page SL:7](#)
 - Combine with extrusion nuts to attach additional components. [See page SL:8](#)

EXTRUSION

Aluminum


PART	SLOT (A)	SLOT DEPTH	OUTSIDE WIDTH	STANDARD LENGTH
SL-SQPROFD	(2) .35" to .38"	(2) .38" to .39"	1-1/4"	12'
SL-SQPROF90	.35" to .38"	.38" to .39"	1-1/4"	8' or 12'
SL-SQPROF3W	(3) .35" to .38"	(3) .38" to .39"	1-1/4"	12'

Note

- Cut to desired length at time of installation. Additional cut charges may apply
- Combine with Blox™ components including specialized hubs, connectors and covers. [See page SL:6](#)




SL-SQPROFD
(180° 2-slot)

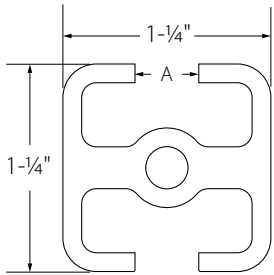

- Tips**
- Combine with inserts and covers for additional options. [See page SL:8](#)
 - Use a Square End Cover (SL-BLOX1.25EC) for a finished look. [See page SL:7](#)
 - Combine with extrusion nuts to attach additional components. [See page SL:8](#)




SL-SQPROF90
(90° 2-slot)

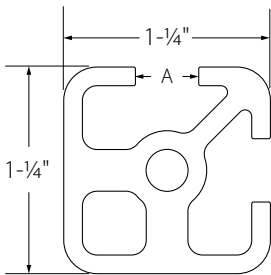


- Tips**
- Combine with inserts and covers for additional options. [See page SL:8](#)
 - Use a Square End Cover (SL-BLOX1.25EC) for a finished look. [See page SL:7](#)
 - Combine with extrusion nuts to attach additional components. [See page SL:8](#)



SL-SQPROF3W
(270° 3-slot)

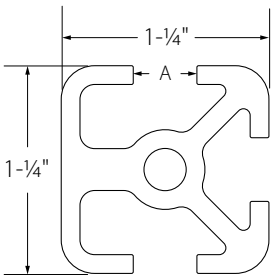

- Tips**
- Combine with inserts and covers for additional options. [See page SL:8](#)
 - Use a Square End Cover (SL-BLOX1.25EC) for a finished look. [See page SL:7](#)
 - Combine with extrusion nuts to attach additional components. [See page SL:8](#)

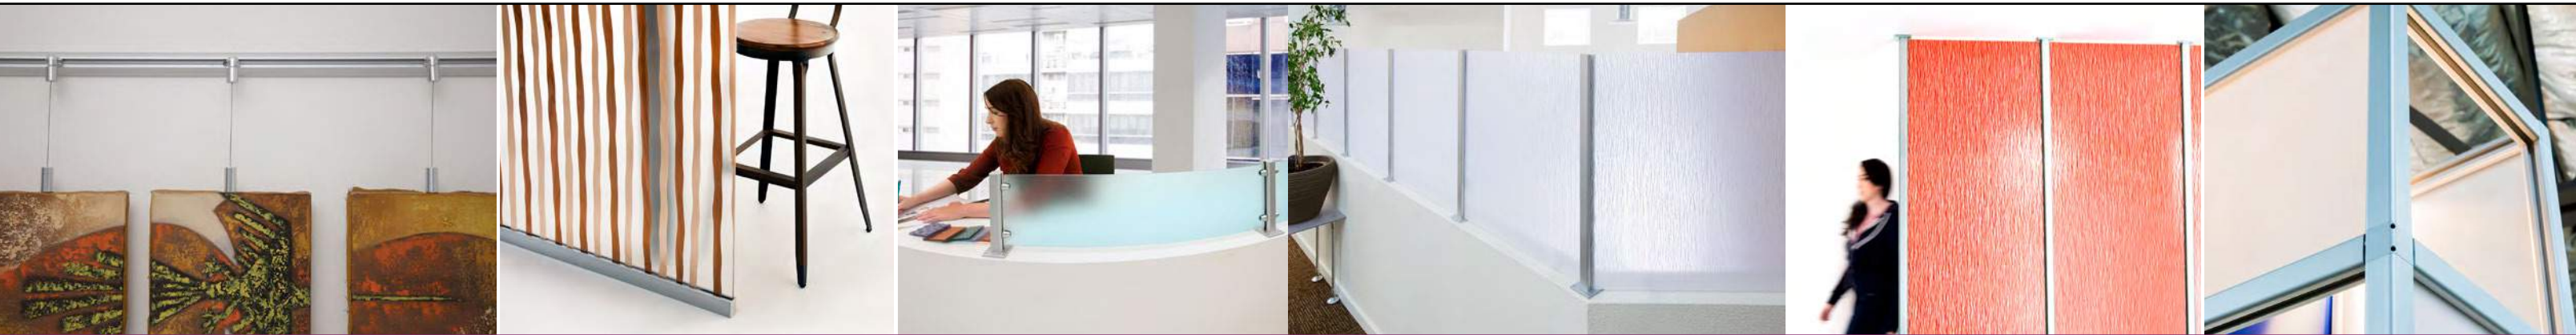




StructureLite Blox™ is a collection of components designed to combine with square extrusion. The Blox line includes specialized hubs, connectors and covers. These components are also designed to be compatible with our other products.



BLOX HUB
Aluminum

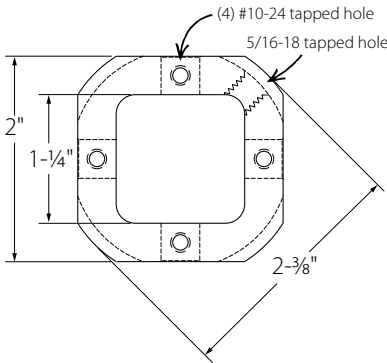


SL-BLOX

PART	EXTENDS
SL-BLOX	1-1/4" extrusion

Note
• Connecting hardware (not included)

HD-NT7 Page HD:3	HD-CP55 Page HD:3
HD-VGBC Page HD:11	HD-DVGBC Page HD:11

BLOX CORNER
Aluminum

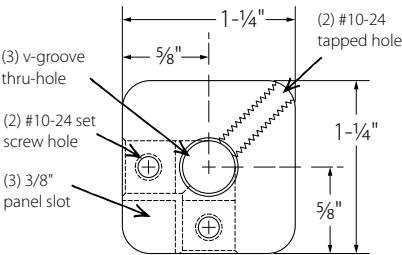

SL-BLOX-CRNR

PART	CONNECTS
SL-BLOX-CRNR	1-1/4" extrusion

Note
• Connecting hardware (not included)

HD-NT7 Page HD:3	HD-CP55 Page HD:3
HD-VGBC Page HD:11	HD-DVGBC Page HD:11

BLOX BRACKETS
Aluminum



SL-SQCON1
Connects SL-SQPROFD to:
• SL-SQPROF
• SL-SQPROF90
• SL-SQPROF3W




SL-SQCON2
Connects:
• SL-SQPROF
• SL-SQPROF90
• SL-SQPROF3W



SL-SQCON3
Connects:
• SL-SQPROFD

Note
• Securing to extrusion requires cup point socket set screws (HD-S15), sold separately. See page HD:2


SQUARE EXTRUSION MOUNT
Powder Coated Aluminum

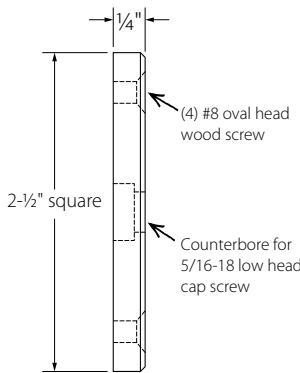

PART	CONNECTS
SL-ASQWMBL	1-1/4" square extrusion

Installation hardware included
• (4) Oval head screw (HD-PS2)

SQUARE END COVER
Aluminum




PART	COVERS	FINISH
SL-BLOX1.25EC	1-1/4" square extrusion	brushed aluminum

Note
• Very high-bond adhesive-backed




EXTRUSION NUTS

Aluminum




SL-CN1




PART	LENGTH	# OF HOLES	TAPPED
SL-CN1	1/2"	1	5/16-18
SL-CN3	1-1/8"	2	5/16-18
SL-CNRH	1-3/4"	2	5/16-18



SL-CN3



SL-CNRH

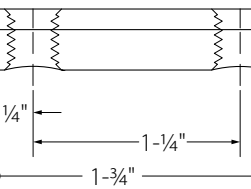

PLASTIC INSERTS


For slotted extrusions

PART	STYLE	FUNCTION	LENGTH
SL-PCS-72	cover strip	cover strip	6'
SL-SPF	flexible spine	grips 1/8" to 1/4"	by the foot
SL-SPR	rigid spine	grips 3/16" to 1/4"	8'

SL-PCS-72



SL-SPF

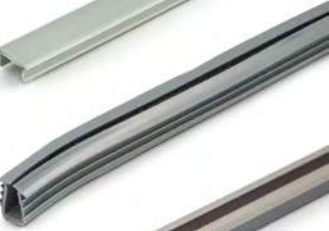

SL-SPR



SL-PCS-72
(in SL-PROF)



SL-SPF
(in SL-PROF)




SL-SPR
(in SL-PROF)

BAFFLE FIN HARDWARE


Aluminum

PART	LENGTH	# OF HOLES	TAPPED
SL-APBS	47-3/4"	9	5/16-18

-  Assembly hardware included
- (9) Cup point socket set screw (HD-S10)
-  Note
- Cut to desired length at time of installation. Additional cut charges may apply

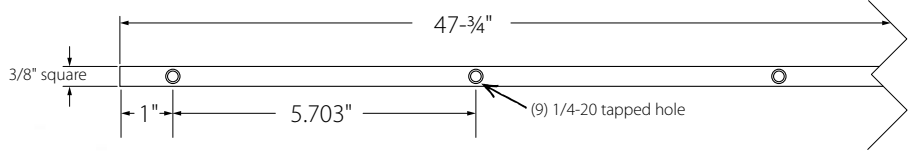


SL-APBS

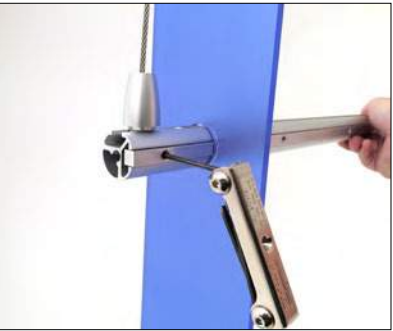

Inspirational Photo Galleries

www.standoffsystems.com/photo-gallery

- Signage/Awards
- Interior Design/Construction
- Shelving/Displays
- Art/Framing
- Retail/POP
- Exhibits/Museums

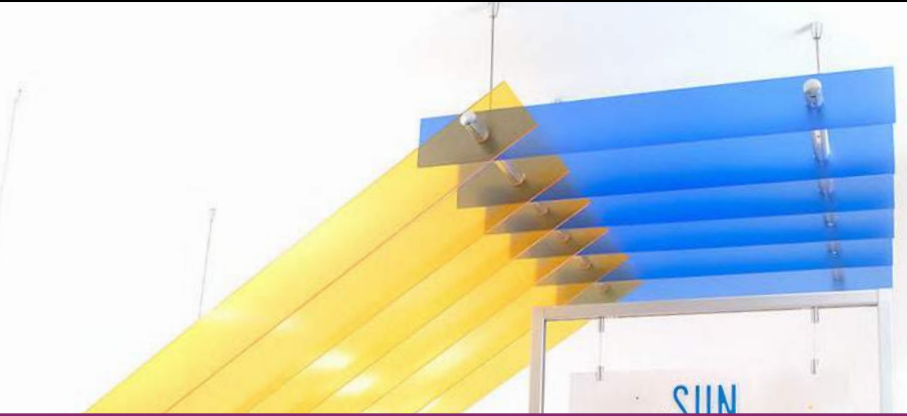


H-TUBE BASE MOUNT ASSEMBLY

Stainless Steel




PART	DIA.	HEIGHT	USE WITH
SL-A2.5HTUBE	2"	2"	SL-A2.5HTUBE

-  Assembly hardware included
 - (1) 8" H-Tube (SL-2.5HTUBE) tapped for base mount
 - (3) Button socket cap screw (HD-BH3)
 - (1) H-Tube Base Mount (SL-2.5BM)
-  Note
 - Use the heavy concrete anchor (HD-CA7) for a sturdy floor-mounted option. **See page HD:8**
 - Can also be installed onto a wood surface with a 1/2" lag bolt (not included)

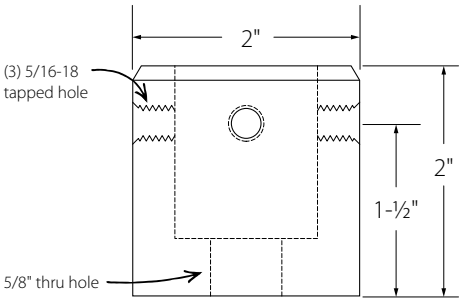

H-TUBE HEAVY TOP CAP

Aluminum

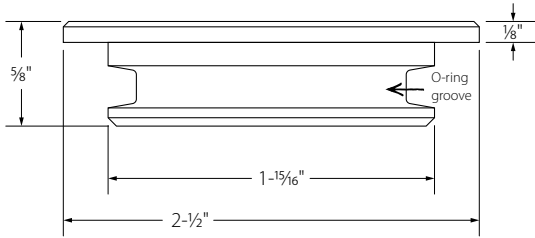

PART	DIA.	EXPOSED HEIGHT	COVERS
SL-A2.5HTC	2-1/2"	1/8"	SL-2.5HTUBE


-  Assembly hardware included
 - (1) Rubber o-ring



SL-A2.5HTC

C-CHANNEL END COVER

Aluminum



PART	SIZE	COVERS
SL-CHNLCAP	1-1/4" x 2-1/8"	C-Channel Extrusion

-  Note
 - Very high-bond adhesive-backed




C-CHANNEL INSTALLATION KIT




PART	USE FOR
SL-CHNLKIT	C-Channel floor to ceiling Installation

-  Assembly hardware included
 - (2) Insert tool
 - (6) Plastic shim
 - (1) 10' x 1/8" rubber cord insert
 - (1) 10' x 3/32" rubber cord insert
-  Note
 - Use to create a secure fit when creating floor-to-ceiling-panel installations with C-Channel for 3/8" and 1/2" thick panels

C-CHANNEL TRIM



SL-TRMCHNH



SL-TRMCHNL



PART	HOLDS (A)	WIDTH (B)	FACE WIDTH (C)	LENGTH
SL-TRIMCHNLH-375	3/8" panels	5/8"	5/16"	8'
SL-TRIMCHNLH-500	1/2" panels	5/8"	5/16"	8'
SL-TRIMCHNL-375	3/8" panels	5/8"	1-5/32"	8'
SL-TRIMCHNL-500	1/2" panels	15/32"	1-1/4"	8'




STRUCTURELITE SPIDER MOUNT

Powder Coated Steel



PART	TAPPED	TAPPED MOUNTING HOLES
SL-SMH2	5/16-18	2
SL-SMH4	5/16-18	4

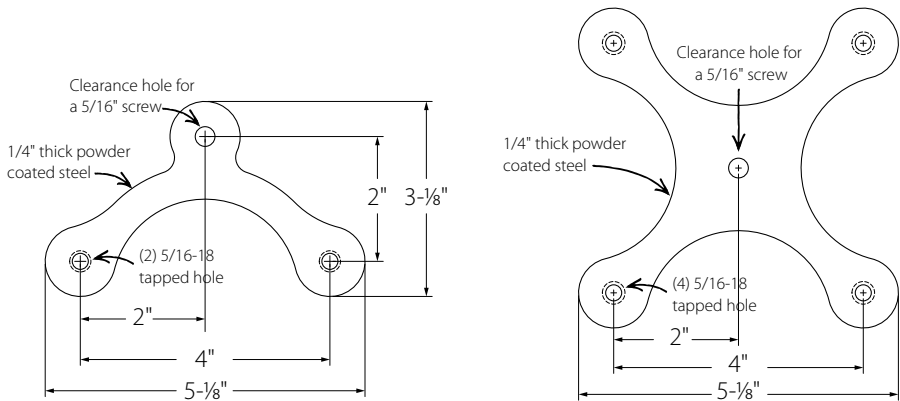


CONNECTION TRAVELERS

Aluminum

PART	DIA. (A)	CONNECTS TO (B)	TAPPED	THREAD DEPTH
SL-ACT3	1-1/4"	2-1/2" extrusion	5/16-18	1/4"
SL-ACT6	1-1/4"	1-1/4" extrusion	5/16-18	1/4"
SL-ACT5	2-1/2"	2-1/2" extrusion	5/16-18	1/4"

- Assembly hardware included
- (3) Cone point socket set screw (HD-CP5)
 - (1) StructureLite Connection Cap (SL-CC)


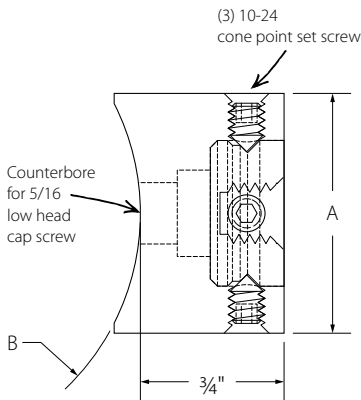


BALL TRAVELER

Aluminum


PART	SLOT	CONNECTS	HOLDS	TAPPED
SL-ABT	no slot	1-1/4" extrusion	1-1/4" extrusion	5/16-18
SL-ASBT	3/8" slot	1-1/4" extrusion	1-1/4" extrusion	5/16-18

- Assembly hardware included
- (1) Nylon tip socket set screw (HD-NT7)
 - (3) Cone point socket set screw (HD-CP5)
 - (1) StructureLite Connection Cap (SL-CC)

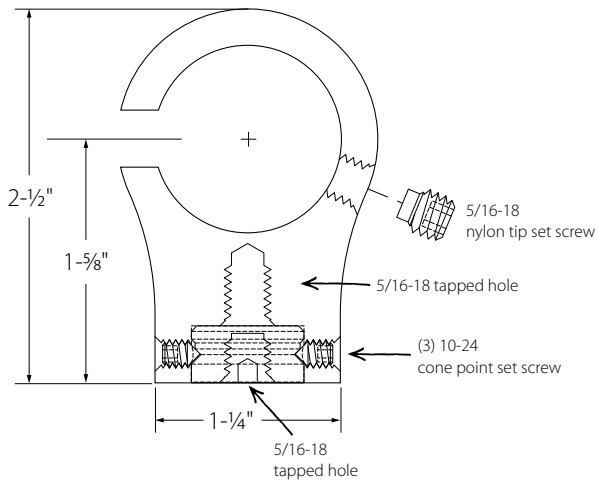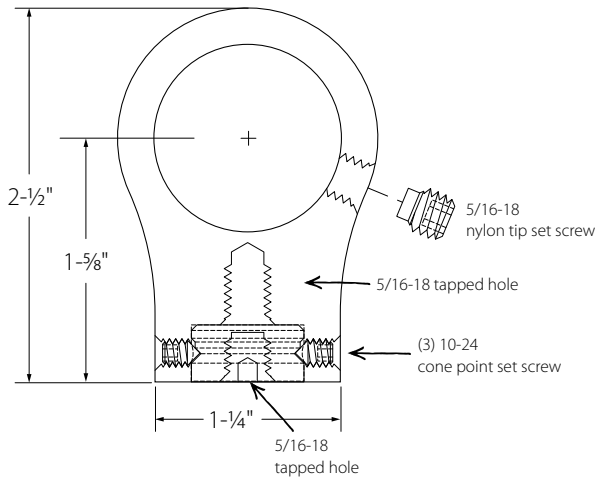

PANEL HINGE

For slotted extrusions

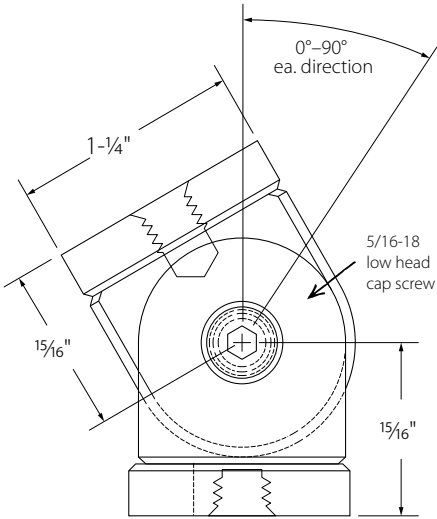

PART	CONNECTS	DIRECTION	TAPPED	THREAD DEPTH
SL-ADCMLH	1-1/4" extrusion	left-facing	5/16-18	1/4"
SL-ADCMRH	1-1/4" extrusion	right-facing	5/16-18	1/4"

-  Assembly hardware included
- (1) Low head socket cap screw (HD-LHD10S)




SL-ADCMLH



SL-ADCMRH

1-WAY WIRE HUB

Aluminum

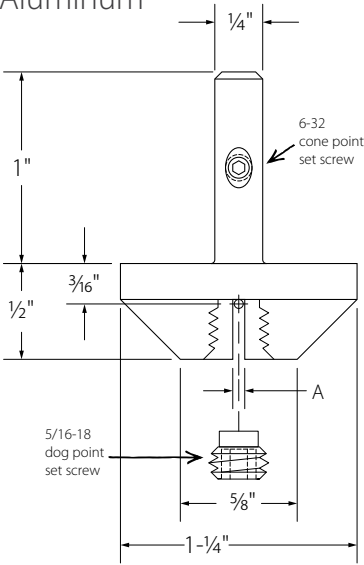

PART	DIA.	LENGTH	WIRE SLOT (A)
WS-A1WHW	1-1/4"	1-1/2"	1/16"
EZ-A125WHW	1-1/4"	1-1/2"	1/8"

-  Assembly hardware included
- (1) Cone point socket set screw (HD-CP3)
 - (1) Dog point socket set screw (HD-DP2)
 - (1) Flat point socket set screw (HD-FPT5)




WS-A1WHW
(For 3/64" wire)



EZ-A125WHW
(For 1/8" wire)

HINGE CLAMPS

Aluminum

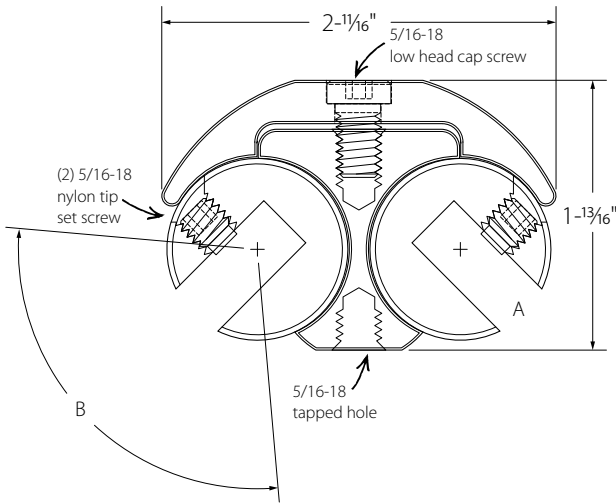

PART	HOLDS	SLOT WIDTH (A)	DEGREES OF ROTATION (B)
SL-AHC-250	1/4" panel	.280"	110°
SL-AHC-375	3/8" panel	.405"	100°
SL-AHC-500	1/2" panel	.530"	85°
SL-AHC-750	3/4" panel	.780"	60°

-  Assembly hardware included
- (1) Low head socket cap screw (HD-LHD8S)
 - (2) Nylon tip socket set screw (HD-NT8)
 - (2) Nylon tip socket set screw (HD-NT7)
 - (2) Oval head screw (HD-PS2)

 Note

- SL-AHC-750 gripper (SL-PC750) has countersink hole for included screw (HD-PS2)



SL-AHC-250
(For 1/4" material)



SL-AHC-375
(For 3/8" material)



SL-AHC-500
(For 1/2" material)




SL-AHC-750
(For 3/4" material)




PROFILE COVER

Aluminum

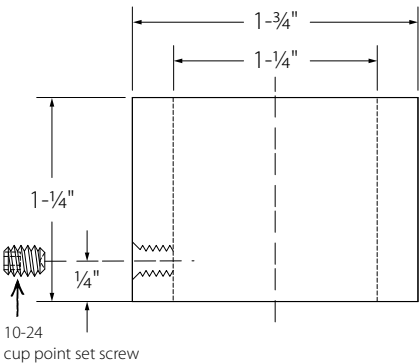


- Assembly hardware included
- (1) Cup point socket set screw (HD-S2)
- Note
- Allows tensioning of floor-to-ceiling extrusion-pillar systems

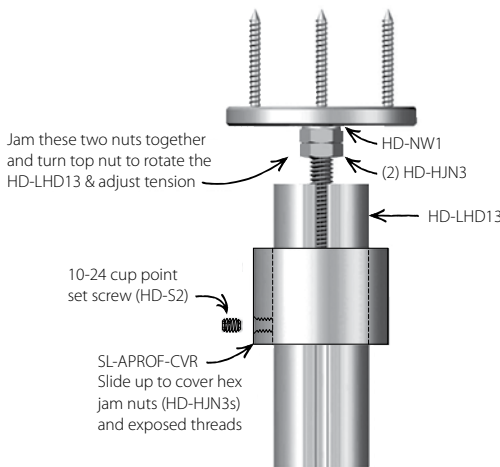

WALL TRACK END CAP


Aluminum



- Assembly hardware included
- (1) Cone point socket set screw (HD-CP3)

EXTRUSION CAP

Aluminum

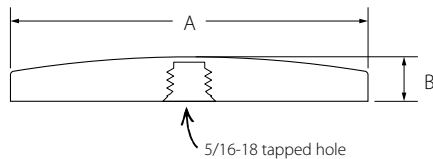

SL-1.25PCAP




SL-2.5PCAP

PART	DIA. (A)	CAP HEIGHT (B)	TAPPED	THREAD DEPTH
SL-1.25PCAP	1-1/4"	5/16"	5/16-18	3/16"
SL-2.5PCAP	2-1/2"	5/16"	5/16-18	3/16"

- Assembly hardware included
- (1) Threaded stud up to 1-1/2" long. Specify stud length or material thickness. [See page HD:2](#)
- Note
- These StructureLite Caps are designed for extrusion, but can also be used as Standoff Caps for barrels of the same diameter

DISC

Aluminum

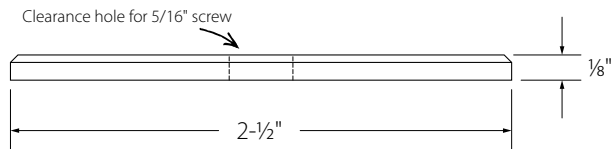

SL-2.5DISC

PART	FITS	DIA.	THICKNESS
SL-2.5DISC	2-1/2" Extrusion	2-1/2"	1/8"




MOUNTING PLATE

Aluminum

PART	DIA.	THICKNESS	TAPPED
SL-5.0AMD	5"	1/4"	counterbore

- ✦ Installation hardware included
- (4) Oval head screw (HD-PS2)

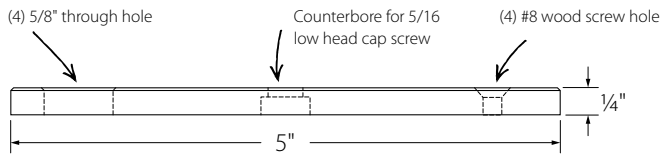


SL-5.0AMD

ROUND FEET

Aluminum

PART	FOOT DIA. (A)	FITS PROFILE DIA. (B)	PAD TYPE	TAPPED	THREAD DEPTH
SL-A2.5FV	2-1/2"	1-1/4"	1/8" vinyl	5/16-18	1/4"
SL-A5FV	5"	1-1/4" & 2-1/2"	1/8" vinyl	5/16-18	1/4"

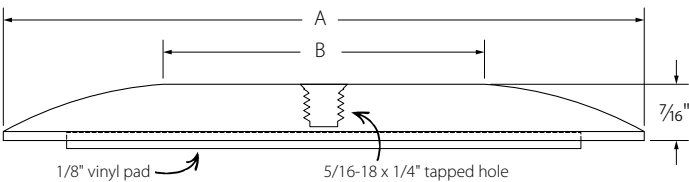


SL-A2.5FV



SL-A5FV

12" BASE PLATE

Powder Coated Steel

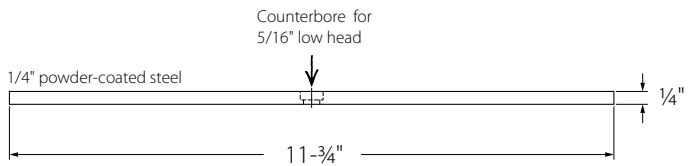


PART	DIA	THICKNESS
SL-12.0BP	11-3/4"	1/4"



STRUCTURELITE BLADE SIGN KIT

Aluminum

PART	LENGTH	MOUNTING PLATE	HOLDS
SLK-BL-125	18"	2.5" square	1/8"
SLK-BL-250	18"	2.5" square	1/4"
SLK-BL-375	18"	2.5" square	3/8"
SLK-BL-500	18"	2.5" square	1/2"

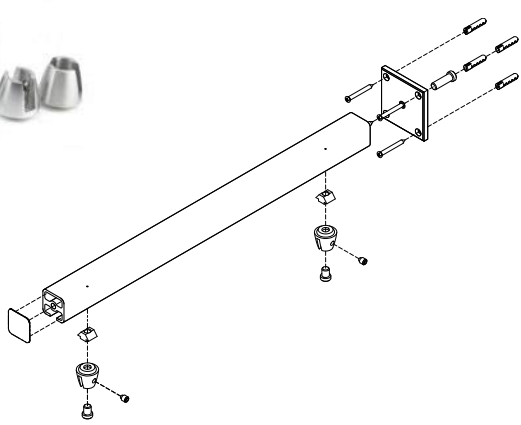

- ✦ Installation hardware included
- (4) All-purpose anchors (HD-FDA1)
 - (4) Oval head screw (HD-PS2)

- ✦ Assembly hardware included
- (1) Square extrusion (SL-SQPROF) cut to 18" and drilled/tapped on one side
 - (1) Mounting plate (SL-ASQWMBL)
 - (1) Low head socket cap Screw (HD-LHD10S)
 - (2) Low head socket cap screw (HD-LHD7)
 - (1) Square Extrusion Cover (SL-BLOX1.25EC)
 - (2) Extrusion nuts (SL-CN1)
 - (2) EZ Grippers (EZ-AG-125, 250, 375, or 500)

📄 Note

- Blade Sign Kit does not include any signage or acrylic material

STRUCTURELITE INDIVIDUAL AND REPLACEMENT PARTS

Visit our website for product specifications

BASE MOUNT



SL-CC
Connection Cap

BASE MOUNT



SL-A2.5BM
H-Tube Base Mount

CONNECTION PINS (see page HD:11)



SL-CP
V-groove



SL-APFS
Press fit/Cone-point set screw fit



HD-DVGBC
Blox Double V-groove Connector



HD-VGBC
Blox V-groove Connector

PANEL CLAMPS



SL-APC-250
1/4" material



SL-APC-375
3/8" material



SL-APC-500
1/2" material



SL-APC-750
3/4" material

HINGES



SL-ADCFRH
Female (right)



SL-ADCFLH
Female (left)



SL-DCM
Male component

PANEL HINGE



SL-AHC
Hinge to use with 1-1/4" extrusion




STRUCTURELITE INDEX

					
SL:2	SL:2	SL:2	SL:3	SL:3	SL:3
					
SL:4	SL:4	SL:4	SL:5	SL:5	SL:5
					
SL:6	SL:6	SL:7	SL:7	SL:7	SL:8
					
SL:8	SL:8	SL:8	SL:8	SL:8	SL:9
					
SL:10	SL:10	SL:11	SL:11	SL:11	SL:11

1	StructureLite Single-Slot Extrusion	SL:2	16	StructureLite Square Extrusion Mount	SL:7
2	StructureLite 180 Degree 2-Slot Extrusion	SL:2	17	StructureLite Square End Cover	SL:7
3	StructureLite 90 Degree 2-Slot Extrusion	SL:2	18	StructureLite Extrusion Nut 1	SL:8
4	StructureLite Extrusion Bar	SL:3	19	StructureLite Extrusion Nut 3	SL:8
5	StructureLite 2-1/2" Diameter Extrusion	SL:3	20	StructureLite Extrusion Nut RH	SL:8
6	StructureLite 2-1/2" Diameter Extrusion	SL:3	21	StructureLite 96" Plastic Cover Strip	SL:8
7	StructureLite Wall Track Extrusion	SL:4	22	StructureLite Rigid Plastic Spline	SL:8
8	StructureLite C-Channel	SL:4	23	StructureLite Flexible Plastic Spline	SL:8
9	StructureLite Square Single-Slot Extrusion	SL:4	24	StructureLite Baffle Fin Hardware	SL:9
10	StructureLite Square 180° 2-Slot Extrusion	SL:5	25	StructureLite H-Tube Base Mount Assembly	SL:10
11	StructureLite Square 90° 2-Slot Extrusion	SL:5	26	StructureLite H-Tube Heavy Top Cap	SL:10
12	StructureLite Square 3-Slot Extrusion	SL:5	27	StructureLite C-Channel End Cover	SL:11
13	StructureLite Blox Hub	SL:6	28	StructureLite C-Channel Installation Kit	SL:11
14	StructureLite Blox Corner	SL:6	29	StructureLite Channel H-Trim	SL:11
15	StructureLite Blox Bracket	SL:7	30	StructureLite Channel C-Trim	SL:11

STRUCTURELITE INDEX

					
SL:12	SL:12	SL:12	SL:13	SL:13	SL:14
					
SL:14/WS:14/EZ:38	SL:15			SL:16	SL:16
					
SL:17	SL:17			SL:18	SL:18
					
SL:18	SL:19	SL:19	SL:19/HD:11	SL:19/HD:11	SL:19/HD:11
					
SL:18	SL:19	SL:19	SL:19/HD:11	SL:19/HD:11	SL:19/HD:11

31	StructureLite Spider Mount 2	SL:12	44	StructureLite Round Foot with Vinyl Pad	SL:18
32	StructureLite Spider Mount 4	SL:12	45	StructureLite 12" Base Plate	SL:18
33	StructureLite 1-1/4 to 2-1/2" Extrusion Connection Traveler	SL:12	46	StructureLite Bade Sign Kit	SL:19
34	StructureLite Ball Traveler	SL:13	47	StructureLite Connection Cap	SL:19
35	StructureLite Slotted Ball Traveler	SL:13	48	StructureLite Connection Pin	SL:19/HD:11
36	StructureLite Extrusion Hinge Assembly	SL:14	49	StructureLite Press Fit Connection Pin	SL:19/HD:11
37	Slotted Wire Hub	SL:14/WS:21/EZ:38	50	StructureLite Blox Connection Pin	SL:19/HD:11
38	StructureLite 1/4" Hinged Panel and Extrusion Gripper	SL:15	51	StructureLite Right Hand Panel Hinge Female Component	SL:19
39	StructureLite Profile Cover	SL:16	52	StructureLite Left Hand Panel Hinge Female Component	SL:19
40	StructureLite Wall Track End Cap	SL:16	53	StructureLite Panel Hinge Male Component	SL:19
41	StructureLite Extrusion Cap	SL:17	54	StructureLite H-Tube Base Mount	SL:19
42	StructureLite 2-1/2" Disc	SL:17	55	StructureLite Panel Clamp	SL:19
43	StructureLite Mounting Plate	SL:18	56	StructureLite Individual Hinge Clip	SL:19

Hardware

Socket set screws	HD:2
Set screws, flat screws, threaded inserts	HD:4
Socket cap screws	HD:5
Wood hanger screws, threaded studs	HD:6
Oval/flat/pan head screws, machine screws	HD:7
All-purpose, & concrete anchors	HD:8
Wallboard, & toggle anchors	HD:9
Nuts, knife edge wood inserts	HD:10
Nut inserts, drop clip, crimp sleeves	HD:11
Washers	HD:12
Plastic tubing, foot pads, thread lock	HD:13
Insert bits, drill bits	HD:14
Cap tools, hex key wrenches, rod jig	HD:15
Wire tools	HD:16
Hardware Index	HD:17



Our Hardware collection is everything you need to connect and install the components in our product lines to a variety of surfaces. Here we provide a complete range of options to help ensure your project is a success from start to finish.

CUP POINT SOCKET SET SCREW

Stainless steel



PART	THREAD SIZE	THREAD LENGTH	DRIVE STYLE
HD-S001	6-32	1/2"	1/16" socket head
HD-S002	6-32	3/4"	1/16" socket head
HD-S003	6-32	7/8"	1/16" socket head
HD-S004	6-32	1"	1/16" socket head
HD-S005	6-32	1-1/4"	1/16" socket head
HD-S006	6-32	1-1/2"	1/16" socket head
HD-S1	10-24	1/8"	3/32" socket head
HD-S2	10-24	1/4"	3/32" socket head
HD-S3	10-24	1/2"	3/32" socket head
HD-S4	10-24	5/8"	3/32" socket head
HD-S5	10-24	3/4"	3/32" socket head
HD-S6	10-24	7/8"	3/32" socket head
HD-S7	10-24	1"	3/32" socket head
HD-S8	10-24	1-1/4"	3/32" socket head
HD-S1025	1/4-20	1/2"	1/8" socket head
HD-S105	1/4-20	3/4"	1/8" socket head
HD-S11	1/4-20	1"	1/8" socket head
HD-S12	1/4-20	1-1/4"	1/8" socket head
HD-S13	1/4-20	1-1/2"	1/8" socket head
HD-S135	5/16-18	5/32"	5/32" socket head
HD-S15	5/16-18	3/8"	5/32" socket head
HD-S16	5/16-18	1/2"	5/32" socket head
HD-S17	5/16-18	5/8"	5/32" socket head
HD-S18	5/16-18	3/4"	5/32" socket head
HD-S19	5/16-18	7/8"	5/32" socket head
HD-S20	5/16-18	1"	5/32" socket head
HD-S205	5/16-18	1-1/8"	5/32" socket head
HD-S21	5/16-18	1-1/4"	5/32" socket head
HD-S22	5/16-18	1-1/2"	5/32" socket head
HD-S23	5/16-18	1-3/4"	5/32" socket head
HD-S24	5/16-18	2"	5/32" socket head



Threaded Studs for Caps

Cup point socket set screws are used as threaded studs for our standoff caps. For lengths over 2", use threaded rod, see page HD:6.

CONE POINT SOCKET SET SCREW

Stainless steel



PART	THREAD SIZE	THREAD LENGTH	DRIVE STYLE
HD-CP1	6-32	1/8"	1/16" socket head
HD-CP2	6-32	3/16"	1/16" socket head
HD-CP3	6-32	1/4"	1/16" socket head
HD-CP5	10-24	1/4"	3/32" socket head
HD-CP55	10-24	3/8"	3/32" socket head
HD-CP7	1/4-28	1/4"	1/8" socket head
HD-CP75	1/4-20	1/4"	1/8" socket head
HD-CP9	5/16-18	1/4"	5/32" socket head
HD-CP10	5/16-18	3/8"	5/32" socket head

DOG POINT SOCKET SET SCREW

Zinc plated steel



PART	THREAD SIZE	THREAD LENGTH	DRIVE STYLE
HD-DP2	5/16-18	1/4"	5/32" socket head

NYLON TIP SOCKET SET SCREW

Stainless steel



PART	THREAD SIZE	THREAD LENGTH	DRIVE STYLE
HD-NT0	6-32	1/8"	1/16" socket head
HD-NT1	10-24	3/16"	3/32" socket head
HD-NT2	10-24	1/4"	3/32" socket head
HD-NT25	10-24	1/2"	3/32" socket head
HD-NT275	10-24	3/4"	3/32" socket head
HD-NT3	1/4-20	3/16"	1/8" socket head
HD-NT4	1/4-20	1/4"	1/8" socket head
HD-NT5	1/4-20	5/16"	1/8" socket head
HD-NT6	1/4-28	3/16"	1/8" socket head
HD-NT7	5/16-18	1/4"	5/32" socket head
HD-NT8	5/16-18	3/8"	5/32" socket head

SET SCREWS, FLAT SCREWS, THREADED INSERTS

FLAT POINT SOCKET SET SCREW

Stainless steel/Zinc plated steel



PART	THREAD SIZE	THREAD LENGTH	DRIVE STYLE
HD-FPT7	6-32	1/8"	1/16" socket head
HD-FPT8	6-32	3/16"	1/16" socket head
HD-FPT2	10-24	3/16"	3/32" socket head
HD-FPT3	10-24	1/4"	3/32" socket head
HD-FPT4	1/4-20	1/4"	1/8" socket head
HD-FPT45	1/4-28	1/4"	1/8" socket head
HD-FPT9	1/4-28	1/2"	1/8" socket head
HD-FPT5*	5/16-18	1/4"	5/32" socket head
HD-FPT6*	5/16-18	3/8"	5/32" socket head

*zinc plated steel

BRASS TIP SET SCREW

Stainless steel



PART	THREAD SIZE	THREAD LENGTH	DRIVE STYLE
HD-BT1	8-32	3/16"	5/64" socket head
HD-BT2	10-24	1/4"	3/32" socket head

FLAT HEAD SCREW

Stainless steel



PART	THREAD SIZE	THREAD LENGTH	OVERALL LENGTH	DRIVE STYLE
HD-FH1	10-24	1/2"	5/8"	phillips head
HD-FH2	10-24	5/8"	3/4"	phillips head
HD-FH3	5/16-18	7/16"	5/8"	phillips head
HD-FH4	5/16-18	9/16"	3/4"	phillips head

DUAL THREADED INSERT

Steel



PART	EXTERNAL THREAD	INTERNAL THREAD	LENGTH
HD-TI-250S	5/16-18	10-24	1/4"
HD-TI-375S	5/16-18	10-24	3/8"
HD-TI-500S	5/16-18	10-24	1/2"
HD-TI-625SR	5/16-18	10-24	5/8"
HD-TI-750SR	5/16-18	10-24	3/4"
HD-TI-875SR	5/16-18	10-24	7/8"
HD-TI-100SR	5/16-18	10-24	1"

SOCKET CAP SCREWS

BUTTON SOCKET CAP SCREW

Various materials



PART	THREAD SIZE	THREAD LENGTH	DRIVE STYLE
HD-BH2	1/4-20	3/4"	5/32" socket head
HD-BH3	5/16-18	3/4"	5/32" socket head
HD-BH4	1/4-20	2-1/2"	5/32" socket head

LOW HEAD SOCKET CAP SCREW

Various materials



PART	THREAD SIZE	THREAD LENGTH	FINISH	DRIVE STYLE
HD-LHD2	10-24	1/2"	stainless	3/32" socket head
HD-LHD3	10-24	5/8"	black	3/32" socket head
HD-LHD4	10-24	3/4"	black	3/32" socket head
HD-LHD65	5/16-18	1/4"	black	5/32" socket head
HD-LHD7	5/16-18	3/8"	black	5/32" socket head
HD-LHD8	5/16-18	1/2"	black	5/32" socket head
HD-LHD8S	5/16-18	1/2"	zinc	5/32" socket head
HD-LHD9	5/16-18	3/4"	black	5/32" socket head
HD-LHD10S	5/16-18	1"	zinc	5/32" socket head
HD-LHD11S	5/16-18	1-1/4"	zinc	5/32" socket head
HD-LHD12	5/16-18	1-1/2"	black	5/32" socket head
HD-LHD13	5/16-18	1-3/4"	black	5/32" socket head
HD-LHD14	5/16-18	2"	black	5/32" socket head

SOCKET HEAD CAP SCREW

Stainless steel



PART	THREAD SIZE	THREAD LENGTH	DRIVE STYLE
HD-STC001	6-32	5/8"	7/64" socket head
HD-STC003	6-32	7/8"	7/64" socket head
HD-STC004	6-32	1"	7/64" socket head
HD-STC005	6-32	1-1/4"	7/64" socket head
HD-STC007	6-32	1/2"	7/64" socket head
HD-STC1	8-32	3/4"	9/64" socket head
HD-STC4	10-24	7/8"	5/32" socket head
HD-STC5	10-24	1"	5/32" socket head
HD-STC6	10-24	1-1/4"	5/32" socket head

WOOD HANGER SCREWS, THREADED STUDS

OVAL/FLAT/PAN HEAD SCREWS, MACHINE SCREWS

WOOD HANGER SCREW

Zinc plated steel



PART	THREAD SIZE	THREAD LENGTH	OVERALL LENGTH	PRE-DRILL
HD-WHS0	6-32	3/4"	1-3/8"	1/16"
HD-WHS1	10-24	5/8"	1-1/2"	1/8"
HD-WHS2	1/4-20	1"	2-3/16"	3/16"
HD-WHS3	5/16-18	9/16"	1-1/2"	1/4"
HD-WHS4	5/16-18	1"	2-1/2"	1/4"
HD-WHS5	5/16-18	2"	4-1/4"	1/4"

DRIVERS FOR WOOD HANGER SCREWS



PART	DRIVER SIZE	USE WITH
HD-WHSD0	driver for 6-32	HD-WHS0
HD-WHSD1	driver for 10-24	HD-WHS1
HD-WHSD2	driver for 5/16-18	HD-WHS3, HD-WHS4, HD-WHS5
HD-WHSD3	driver for 1/4-20	HD-WHS2
HD-ACN1	driver for 10-24	HD-WHS1

THREADED ROD

Zinc plated steel



PART	THREAD SIZE	THREAD LENGTH
HD-TS1	10-24	1-1/2"
HD-TS2	10-24	2"
HD-TS3	10-24	2-1/2"
HD-TS4	10-24	3"
HD-TS5	10-24	4"
HD-TS10	1/4-20	2"
HD-TS11	1/4-20	2-1/2"
HD-TS12	1/4-20	3"
HD-TS6	5/16-18	2-1/4"
HD-TS7	5/16-18	2-1/2"
HD-TS8	5/16-18	3"
HD-TS9	5/16-18	4"

THREADED ROD BY THE FOOT

Zinc plated steel



PART	THREAD SIZE	THREAD
HD-THR5	5/16-18	right hand

Note: Cut charges apply. Maximum of 6 feet.

OVAL HEAD SCREW

Zinc plated steel



PART	THREAD SIZE	LENGTH	FINISH	THREAD
HD-PS1	8	1-1/4"	zinc	tapping
HD-PS2	8	1-1/2"	zinc	tapping
HD-PS3	8	2"	zinc	tapping

FLAT WASHER HEAD SCREW

Zinc plated steel



PART	THREAD SIZE	LENGTH	FINISH	THREAD
HD-PS4	8	1-1/4"	zinc	tapping
HD-PS5	8	2"	zinc	tapping

PAN HEAD SCREW

Zinc plated steel



PART	THREAD SIZE	LENGTH	FINISH	THREAD
HD-PS8	12	3/4"	zinc	tapping
HD-PS9	12	1-1/4"	zinc	tapping
HD-PS95	12	2"	zinc	tapping
HD-PS10	6-32	2"	zinc	machine
HD-PS11	10-24	2"	zinc	machine
HD-PS12	10-24	3"	zinc	machine

CONVERSION MACHINE SCREW

Steel



PART	THREAD SIZE	5/16-18 LENGTH	LENGTH	THREAD
HD-CSC1	5/16-18 to 1/4-20	5/16"	7/8"	machine
HD-CSC2	5/16-18 to 1/4-20	5/16"	1-5/16"	machine
HD-CSC3	5/16-18 to 1/4-20	5/16"	1-13/16"	machine
HD-CSC4	5/16-18 to 10-24	1/4"	17/32"	machine
HD-CSC5	5/16-18 to 1/4-20	5/16"	3-1/16"	machine

Note: The HD-CSC4 requires a 5/32" hex socket.

COMBINATION SCREW

Zinc plated steel



PART	THREAD SIZE	5/16-18 LENGTH	LENGTH	THREAD
HD-CBS1	5/16-18 to 8	5/16"	1-1/2"	combo
HD-CBS2	5/16-18 to 8	5/16"	2"	combo
HD-CBS5	5/16-18 to 8	3/16"	1-1/2"	combo
HD-CBS6	1/4-20 to 8	5/16"	1-1/2"	combo

Note: Requires a 5/32" hex socket.

ALL PURPOSE WALL ANCHOR

Polypropylene



PART	USE WITH SCREW SIZE	LENGTH	PRE-DRILL
HD-FDA0	4-10	15/16"	3/16"
HD-FDA1	6-12	1-1/8"	1/4"
HD-FDA2	8-14	1-9/16"	5/16"

WALL ANCHOR ASSEMBLY

Wood hanger screw, anchor & thread



PART	THREAD SIZE	THREAD LENGTH	THREADED INSERT
HD-AWA-250	5/16-18	1/4"	HD-TI250S
HD-AWA-375	5/16-18	3/8"	HD-TI375S
HD-AWA-500	5/16-18	1/2"	HD-TI500S
HD-AWA-625	5/16-18	5/8"	HD-TI625S
HD-AWA-750	5/16-18	3/4"	HD-TI750S
HD-AWA-875	5/16-18	7/8"	HD-TI875S
HD-AWA-100	5/16-18	1"	HD-TI100S

Included: HD-FDA1, HD-WHS1, threaded insert (see above)
Installation Tip: Use drivers (HD-WHSD or HD-ACN1, see page HD:6)

CONCRETE ANCHOR

Various materials



HD-CA1

HD-ACM1

PART	THREAD SIZE	THREAD LENGTH	PRE-DRILL
HD-CA1	5/16-18	—	5/8" x 1-1/2" deep
HD-ACM1	5/16-18	1-1/2"	5/8" x 1-1/2" deep
HD-CA4	8	—	1/4" x 1-1/2" deep
HD-CA2	10-24	varies	1/4" x 1-1/2" deep
HD-CA3	5/16-18	varies	3/8" x 2" deep
HD-CA5	1/4-20	3/4" max	1/4" x 1-1/2" deep
HD-CA6	5/16-18	7/8" max	5/16" x 2" deep
HD-CA7	—	7"	1/2" x 7" deep



HD-CA4



HD-CA2



HD-CA3



HD-CA5



HD-CA6



HD-CA7

TOOL FOR HD-CA1 & HD-ACM1



PART	THREAD SIZE	THREAD LENGTH
HD-ACMT	5/16-18	2"

SELF DRILLING WALLBOARD ANCHOR

For wallboard or drywall



HD-WBL

HD-AWBSA

HD-AWB2

PART	THREAD SIZE	THREAD LENGTH	SCREW TYPE
HD-WBL	8	9/64"	phillips head
HD-AWBSA	8	9/64"	phillips head
HD-AWB2	5/16-18	5/16"	5/32" hex head

SELF DRILLING TOGGLE ANCHOR

For drywall



HD-ASDT

HD-ASTB

HD-TA

PART	TYPE	LENGTH	SCREW TYPE
HD-ASDT	flat washer head	—	HD-PS5, HD-TA
HD-ASTB	5/16-18	2"	HD-CBS2, HD-TA
HD-TA	8 anchor	—	HD-TA

TOGGLE BOLT WING & ANCHOR

For hollow wall and drywall



HD-TW2

HD-TW3

HD-TW4

PART	THREAD SIZE	PRE-DRILL	OPEN SIZE	INCLUDED
HD-TW2	10-24	1/2"	1-1/4"	anchor only
HD-TW3	1/4-20	3/4"	1-1/4"	anchor only
HD-TW4	5/16-18	7/8"	1-1/2"	anchor only
HD-ATWA1	5/16-18 x 3"	7/8"	1-7/8"	HD-TW4, HD-TS8
HD-ATWA2	10-24 x 3"	1/2"	1-1/2"	HD-TW2, HD-TS4, HD-TI-500S
HD-ATWA3	10-24 x 3"	1/2"	1-1/2"	HD-TW2, HD-PS12
HD-ZTOG1	10-24	1/2"	2-1/4"	anchor only
HD-ZTOG2	1/4-20	1/2"	2-1/4"	anchor only
HD-AZT	5/16-18	1/2"	2-1/4"	HD-ZTOG2, HD-CSC5
HD-AZTM	1/4-20	1/2"	2-1/4"	HD-ZTOG2, HD-BH4



HD-ATWA1



HD-ATWA2



HD-ATWA3



HD-ZTOG1



HD-ZTOG2



HD-AZT



HD-AZTM

NUTS, KNIFE EDGE WOOD INSERTS

HEX JAM NUT

Zinc plated steel



PART	THREAD SIZE	TYPE
HD-HJN0	6-32	right hand thread
HD-HJN1	10-24	right hand thread
HD-HJN2	1/4-20	right hand thread
HD-HJN3	5/16-18	right hand thread
HD-HJN4	5/16-18	left hand thread

WING NUT

Zinc plated steel



PART	THREAD SIZE
HD-WN	5/16-18

T-NUT INSERT

Zinc plated steel



PART	THREAD SIZE	THREAD LENGTH	PRE-DRILL
HD-WTN1	10-24	3/8"	1/4"
HD-WTN2	1/4-20	7/16"	5/16"
HD-WTN3	5/16-18	7/16"	3/8"
HD-WTN4	5/16-18	11/16"	3/8"

THREADED KNIFE EDGE WOOD INSERT

Brass



PART	THREAD SIZE	THREAD LENGTH	PRE-DRILL
HD-WI1	10-24	1/2"	3/8"
HD-WI2	1/4-20	1/2"	3/8"
HD-WI3	5/16-18	5/8"	1/2"


DRIVER FOR THREADED KNIFE EDGE WOOD INSERTS



PART	THREAD	USE WITH
HD-WID1	10-24	HD-WI1
HD-WID2	1/4-20	HD-WI2
HD-WID3	5/16-18	HD-WI3

SLATWALL NUT

For slat walls

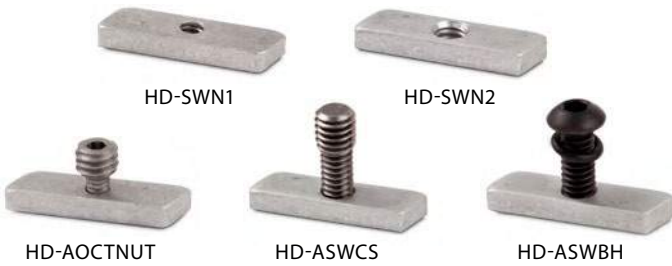

PART	THREAD SIZE	INCLUDED
HD-SWN1	10-24	slatwall nut only
HD-SWN2	1/4-20	slatwall nut only
HD-AOCTNUT	5/16-18	HD-SWN1, HD-CSC4
HD-ASWCS	5/16-18	HD-SWN2, HD-CSC1
HD-ASWBH	1/4-20	HD-SWN2, HD-SWS0, HD-BH2

NUT INSERTS, DROP CLIP, CRIMP SLEEVES

CONNECTION PIN

For attaching hardware and extrusions



PART	THREAD	THREAD LENGTH	MATERIAL
SL-CP	5/16-18	1/4"	steel
SL-APFS	5/16-18	1/4"	steel
HD-VGBC	5/16-18	9/16"	steel
HD-DVGBC	—	—	steel

DROP CEILING CLIP

For attaching hardware to T-bar ceilings



PART	DESCRIPTION	MAX LOAD	MATERIAL
HD-DCLIP	2 piece part	15 lbs.	aluminum, white

HEAVY CONNECTION WASHER

For EZ-Wire turnbuckles



PART	WIRE SIZE	USE WITH	MATERIAL
EZ-HW-125	1/8"	wire turnbuckles	aluminum

STOP CRIMP SLEEVE


For the end of a wire



PART	WIRE SIZE	MATERIAL	FINISH
HD-SL-062	3/64"	copper	tin
HD-SL-125	1/8"	copper	tin

OVAL CRIMP SLEEVE

For creating a loop on the end of a wire



PART	WIRE SIZE	MATERIAL	FINISH
HD-OS-062	3/64"	copper	zinc
HD-OS-125	1/8"	copper	zinc

WASHERS

WASHER

Vinyl



PART	INSIDE DIA.	OUTSIDE DIA.	THICKNESS	COLOR
HD-NW-563	5/16"	9/16"	1/32"	clear
HD-NW-875	5/16"	7/8"	1/32"	clear
HD-NW-1.125	5/16"	1-1/8"	1/16"	clear
HD-NW-1.375	5/16"	1-3/8"	1/16"	clear
HD-NW-1.875	5/16"	1-7/8"	1/16"	clear
HD-NW-2.25	5/16"	2-1/4"	1/16"	opaque
HD-VWSS3	7/16"	3/4"	1/32"	clear
HD-VWSS4	7/16"	1"	1/32"	clear

WASHER

Nylon



PART	INSIDE DIA.	OUTSIDE DIA.	THICKNESS	COLOR
HD-NW1	5/16"	1/2"	1/32"	opaque
HD-NW2	5/16"	3/4"	1/16"	opaque

PANEL CLIP SHIM

Vinyl with adhesive



PART	DIA.	THICKNESS	USE WITH	COLOR
HD-VS-100	1"	1/16"	SO-APC100, SO-ADPEG9	clear
HD-VS-125	1-1/4"	1/16"	SO-APC125, SO-ADPEG3	clear

TIMING WASHER

Silicone



PART	INSIDE DIA.	OUTSIDE DIA.	THICKNESS	USE WITH
HD-563RW	5/16"	9/16"	1/32"	5/8" parts
HD-1.125RW	5/16"	1-1/8"	1/16"	1-1/4" parts

WASHER

Zinc plated steel



PART	INSIDE DIA.	OUTSIDE DIA.	FINISH
HD-MW0	5/32"	5/16"	zinc
HD-MW1	3/16"	7/16"	zinc
HD-MW2	1/4"	9/16"	zinc
HD-MW3	5/16"	3/4"	zinc
HD-MW4	5/16"	1-1/4"	zinc

PLASTIC TUBING, FOOT PADS, THREAD LOCK

PLASTIC TUBING

For protecting material from hardware



PART	INSIDE DIA.	OUTSIDE DIA.	LENGTH
HD-PT1*	3/16"	5/16"	by the foot
HD-PT2*	1/4"	3/8"	by the foot
HD-PT3*	5/16"	7/16"	by the foot
HD-PT4*	1/2"	5/8"	by the foot
HD-PT5*	1/2"	3/4"	by the foot
HD-PT6*	7/16"	9/16"	by the foot
HD-PTLP1	1/2"	5/8"	1/4"
HD-PTLP2	1/2"	3/4"	1/4"
HD-PTLP3	7/16"	9/16"	3/16"
HD-PT-250	5/16"	7/16"	1/4"
HD-PT-375	5/16"	7/16"	3/8"
HD-PT-500	5/16"	7/16"	1/2"
HD-PT-750	5/16"	7/16"	3/4"

*Additional cut charges may apply

FOOT PAD

Vinyl with adhesive



PART	DIA.	THICKNESS	MATERIAL
HD-2.5VP	2"	1/8"	clear vinyl
HD-VP	4"	1/8"	clear vinyl

THREAD LOCK

Adhesive




PART	SIZE	STRENGTH	DESCRIPTION
HD-TLMS	.32 oz	medium	removable
HD-TLHS	.32 oz	high	permanent

INSERT BITS, DRILL BITS

INSERT BIT

Steel



PART	SIZE	LENGTH
HD-HBD1	1/16" hex	—
HD-HBD2	3/32" hex	—
HD-HBD3	1/8" hex	—
HD-HBD4	5/32" hex	—
HD-PD2	2 phillips head hex	2" long



DRILL BITS

High speed steel (0° rake)



PART	SIZE	LENGTH
HD-DRILLP	.323"	4.75"
HD-DRILLCS	21/64"	4.75"
HD-DRILLSTP	29/64"	5.8125"

DRILL & TAP KIT

High speed steel



PART	SIZE
HD-ATD3	5/16-18

Included: tap and drill bit

CAP TOOLS, HEX KEY WRENCHES, ROD JIG

GRIPPER SLEEVE TOOL

For standard caps



PART	INSIDE DIA.
HD-GPS1	3/8"
HD-GPS2	5/8"
HD-GPS4	1"
HD-GPS5	1-1/4"
HD-GPS6	1-1/2"

NEOPRENE WRENCH

For low profile caps



PART	DIA.
HD-NW	5"

SECURITY CAP TOOL

For security caps



PART	DIA.	LENGTH
HD-SCT	3/32"	2"

HEX KEY WRENCH

Steel alloy



PART	SIZE	FINISH
HD-HLK1	1/16"	black
HD-HLK2	3/32"	black
HD-HLK3	1/8"	black
HD-HLK4	5/32"	black
HD-HKS	.050 to 3/16"	black

ROD DRILLING JIG & ROLL PIN

For drilling EZ-ROD-375

to use in heavy rod turnbuckles



PART	DESC.	INCLUDED
HD-A375RDJ	drills 3/8" rod	HD-375RDJ & HD-RPD
HD-RPD	3/32 drill	drill bit only
HD-375RDJ	—	drill jig only
HD-332RP	3/32" roll pin	roll pin only

WIRE TOOLS

WIRE BYPASS CUTTER

Prevents wire fraying



HD-CUTTER

PART	CUTS
HD-CUTTER	3/64" to 1/8" wire

CRIMPING TOOL

For crimping wire



HD-ACC-062



HD-A250CRIMP

PART	SIZE
HD-ACC-062	3/64" wire
HD-A250CRIMP	1/8" wire



HARDWARE INDEX

 HD:2	 HD:3	 HD:3	 HD:3	 HD:4	 HD:4
 HD:4	 HD:4	 HD:5		 HD:5	 HD:5
 HD:5	 HD:6	 HD:6		 HD:6	 HD:6
 HD:6	 HD:7	 HD:7	 HD:7	 HD:7	 HD:7
 HD:8	 HD:8	 HD:8	 HD:8	 HD:9	 HD:9

1 Cup Point Socket Set Screw HD-S001, HD-S002, HD-S003, HD-S004, HD-S005, HD-S006, HD-S1, HD-S2, HD-S3, HD-S4, HD-S5, HD-S6, HD-S7	HD:2	13 Driver for Wood Hanger Screws HD-WHSD0, HD-WHSD1, HD-WHSD2, HD-WHSD3, HD-ACN1	HD:6
Cup Point Socket Set Screw (cont.) HD-S8, HD-S1025, HD-S105, HD-S11, HD-S12, HD-S13, HD-S135, HD-S15, HD-S16, HD-S17, HD-S18	HD:2	14 Threaded Rod HD-TS1, HD-TS2, HD-TS3, HD-TS4, HD-TS5, HD-TS10, HD-TS11, HD-TS12, HD-TS6, HD-TS7, HD-TS8, HD-TS9	HD:6
Cup Point Socket Set Screw (cont.) HD-S19, HD-S20, HD-S205, HD-S21, HD-S22, HD-S23, HD-S24	HD:2	15 Threaded Rod by the Foot HD-THR5	HD:6
2 Cone Point Socket Set Screw HD-CP1, HD-CP2, HD-CP3, HD-CP5, HD-CP55, HD-CP7, HD-CP75, HD-CP9, HD-CP10	HD:3	16 Oval Head Screw HD-PS1, HD-PS2, HD-PS3	HD:7
3 Dog Point Socket Set Screw HD-DP2	HD:3	17 Flat Washer Head Screw HD-PS4, HD-PS5	HD:7
4 Nylon Tip Socket Set Screw HD-NT0, HD-NT1, HD-NT2, HD-NT25, HD-NT275, HD-NT3, HD-NT4, HD-NT5, HD-NT6, HD-NT7, HD-NT8	HD:3	18 Pan Head Screw HD-PS8, HD-PS9, HD-PS95, HD-PS10, HD-PS11, HD-PS12	HD:7
5 Flat Point Socket Set Screw HD-FPT7, HD-FPT8, HD-FPT2, HD-FPT3, HD-FPT4, HD-FPT45, HD-FPT9, HD-FPT5, HD-FPT6	HD:4	19 Conversion Machine Screw HD-CSC1, HD-CSC2, HD-CSC3, HD-CSC4, HD-CSC5	HD:7
6 Brass Tip Set Screw HD-BT1, HD-BT2	HD:4	20 Combination Screw HD-CBS1, HD-CBS2, HD-CBS5, HD-CBS6	HD:7
7 Flat Head Screw HD-FH1, HD-FH2, HD-FH3, HD-FH4	HD:4	21 All-Purpose Wall Anchor HD-FDA0, HD-FDA1, HD-FDA2	HD:8
8 Dual Threaded Inserts HD-TI-250S, HD-TI-375S, HD-TI-500S, HD-TI-625SR, HD-TI-750SR, HD-TI-875SR, HD-TI-100SR	HD:4	22 Wall Anchor Assembly HD-AWA-250, HD-AWA-375, HD-AWA-500, HD-AWA-625, HD-AWA-750, HD-AWA-875, HD-AWA-100	HD:8
9 Button Socket Cap Screw HD-BH2, HD-BH3, HD-BH4	HD:5	23 Concrete Anchor HD-CA1, HD-ACM1, HD-CA4, HD-CA2, HD-CA3, HD-CA5, HD-CA6, HD-CA7	HD:8
10 Low Head Socket Cap Screw HD-LHD2, HD-LHD3, HD-LHD4, HD-LHD65, HD-LHD7, HD-LHD8, HD-LHD85, HD-LHD9	HD:5	24 Concrete Anchor Tool HD-ACMT	HD:8
Low Head Socket Cap Screw (cont.) HD-LHD105, HD-LHD115, HD-LHD12, HD-LHD13, HD-LHD14	HD:5	25 Self-Drilling Wallboard Anchor HD-WBL, HD-AWBSA, HD-AWB2	HD:9
11 Socket Head Cap Screw HD-STC001, HD-STC003, HD-STC004, HD-STC005, HD-STC007, HD-STC1, HD-STC4, HD-STC5, HD-STC6	HD:5	26 Self-Drilling Toggle Anchor HD-ASDT, HD-ASTB, HD-TA	HD:9
12 Wood Hanger Screw HD-WHS0, HD-WHS1, HD-WHS2, HD-WHS3, HD-WHS4, HD-WHS5	HD:6		

HARDWARE INDEX

27  HD:9	28  HD:9	29  HD:9	30  HD:9		
31  HD:10	32  HD:10	33  HD:10	34  HD:10		
35  HD:10	36  HD:10	37  HD:10	38  HD:10	39  HD:11	40  HD:11
41  HD:11	42  HD:11	43  HD:11	44  HD:12	45  HD:12	46  HD:12
47  HD:12	48  HD:12	49  HD:13	50  HD:13	51  HD:13	52  HD:13

27	Toggle Bolt Wing	HD:9	40	Drop Ceiling Clip	HD:11
HD-TW2, HD-TW3, HD-TW4			HD-DCLIP		
28	Toggle Bolt Wing & Anchor	HD:9	41	Heavy Connection Washer	HD:11
HD-ATWA1, HD-ATWA2, HD-ATWA3			EZ-HW-125		
29	Zip Toggle	HD:9	42	Stop Crimp Sleeve	HD:11
HD-ZTOG1, HD-ZTOG2			HD-SL-062, HD-SL-125		
30	Zip Toggle & Anchor	HD:9	43	Oval Crimp Sleeve	HD:11
HD-AZT, HD-AZTM			HD-OS-062, HD-OS-125		
31	Hex Jam Nut	HD:10	44	Vinyl Washer	HD:12
HD-HJN0, HD-HJN1, HD-HJN2, HD-HJN3, HD-HJN4			HD-NW-563, HD-NW-875, HD-NW-1.125, HD-NW-1.375, HD-NW-1.875, HD-NW-2.25, HD-VWSS3, HD-VWSS4		
32	Wing Nut	HD:10	45	Nylon Washer	HD:12
HD-WN			HD-NW1, HD-NW2		
33	T-Nut Insert	HD:10	46	Panel Clip Shims	HD:12
HD-WTN1, HD-WTN2, HD-WTN3, HD-WTN4			HD-VS-100, HD-VS-125		
34	Threaded Knife Edge Wood Insert	HD:10	47	Timing Washer	HD:12
HD-WI1, HD-WI2, HD-WI3			HD-563RW, HD-1.125RW		
35	Driver for Threaded Knife Edge Wood Insert	HD:10	48	Washer	HD:12
HD-WID1, HD-WID2, HD-WID3			HD-MW0, HD-MW1, HD-MW2, HD-MW3, HD-MW4		
36	Slatwall Nut	HD:10	49	Protective Plastic Tubing by the Foot	HD:13
HD-SWN1, HD-SWN2			HD-PT1, HD-PT2, HD-PT3, HD-PT4, HD-PT5, HD-PT6		
37	Slatwall Nut with Conversion Screw	HD:10	50	Protective Plastic Tubing Pieces	HD:13
HD-AOCTNUT, HD-ASWCS			HD-PTLP1, HD-PTLP2, HD-PTLP3, HD-PT250, HD-PT375, HD-PT500, HD-PT750		
38	Slatwall Nut with Button Socket Cap Screw	HD:10	51	Vinyl Foot Pad with Adhesive	HD:13
HD-ASWBH			HD-VP, HD-2.5VP		
39	Connection Pin	HD:11	52	Removable Thread Lock	HD:13
SL-CP, SL-APFS, HD-VGBC, HD-DVGBC			HD-TLMS		

HARDWARE INDEX



53  HD:13	54  HD:14	55  HD:14	56  HD:14	57  HD:15	58  HD:15
59  HD:15	60  HD:15	61  HD:15	62  HD:15	63  HD:15	64  HD:15
65  HD:15	66  HD:16	67  HD:16	68  HD:16		

53	Permenant Thread Lock	HD:13	61	Hex Key Tool	HD:15
HD-TLHS			HD-HKS		
54	Hex Insert Bit	HD:14	62	Rod Drilling Jig and Drill Bit	HD:15
HD-HBD1, HD-HBD2, HD-HBD3, HD-HBD4, HD-PD2			HD-A375RDJ		
55	Drill Bits	HD:14	63	Rod Drilling Drill Bit	HD:15
HD-DRILLP, HD-DRILLCS, HD-DRILLSTP			HD-RPD		
56	Drill & Tap Kit	HD:14	64	Rod Drilling Jig	HD:15
HD-ATD3			HD-375RDJ		
57	Gripper Sleeve Tool for Standard Caps	HD:15	65	Rod Drilling Roll Pin	HD:15
HD-GPS1, HD-GPS2, HD-GPS4, HD-GPS5, HD-GPS6			HD-332RP		
58	Neoprene Wrench	HD:15	66	Wire Bypass Cutter	HD:16
HD-NW			HD-CUTTER		
59	Security Cap Tool	HD:15	67	Crimping Tool for 3/64" Wire	HD:16
HD-SCT			HD-ACC-062		
60	Hex Key Wrench	HD:15	68	Crimping Tool for 1/8" Wire	HD:16
HD-HLK1, HD-HLK2, HD-HLK3, HD-HLK4			HD-A250CRIMP		

LED STANDOFF DEMO



DEMO-LED-BLET
(Etched Panel)



DEMO-LED-BLCL
(Clear Panel)

PART	PANEL	DEMONSTRATES
DEMO-LED-BLET	Etched	LED illuminated panels
DEMO-LED-BLCL	Clear	LED illuminated panels

- Note
- Comes standard with a choice of a pre-etched acrylic panel or a clear panel for a custom engraving of your choice. For additional acrylic panels, see below

LED STANDOFF DEMO PLEX

PART	PANEL
DEMO-LED-PLEX-CL	Clear
DEMO-LED-PLEX-ETCH	Etched



ETCHED PANEL
(Includes etched design)



CLEAR PANEL
(For custom etching)

COLORED CAP DEMO



DEMO-CLR

PART	DEMONSTRATES
DEMO-CLR	Custom colors and finishes

- Note
- The Colored Cap Demo Display contains a sampling of what's possible with custom colors and finishes
 - Includes 10.24" x 4" printed card with descriptions




DEMO CARD
(Front)

STANDOFF DEMO DISPLAY



PART	DEMONSTRATES
DEMO-SO-1	Standoff options

- Note
- Comes standard with a printed card indicating diameters of supplied standoffs.

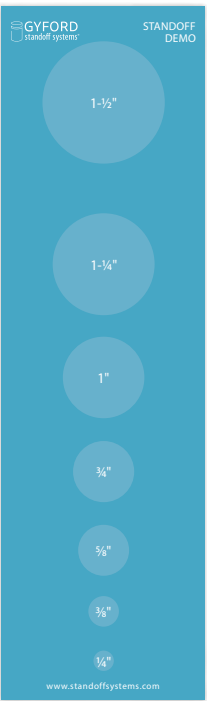


DEMO CARD
(Front)

STANDOFF DEMO					
AL: Aluminum BL: Black Anodized BR: Brass Boreless SS: Stainless Steel					
1-1/2" DIAMETER STANDOFF BARRELS					
Length	AL	BL	BR	SS	
1/2"	✓				
1"	✓				
2"	✓				
3"	✓				
4"	✓				
1-1/4" DIAMETER STANDOFF BARRELS					
Length	AL	BL	BR	SS	
1/2"	✓				
5/8"	✓				
1"	✓				
1-1/2"	✓			✓	
2"	✓				
3"	✓				
4"	✓				
6"	✓				
10"	✓				
12"	✓				
1" DIAMETER STANDOFF BARRELS					
Length	AL	BL	BR	SS	
1/2"	✓				
5/8"	✓				
1"	✓	✓	✓	✓	
1-1/2"	✓	✓	✓	✓	
2"	✓	✓	✓	✓	
3"	✓	✓	✓	✓	
4"	✓	✓	✓	✓	
6"	✓	✓	✓	✓	
3/4" DIAMETER STANDOFF BARRELS					
Length	AL	BL	BR	SS	
1/2"	✓				
5/8"	✓				
1"	✓				
1-1/2"	✓				
2"	✓				
3"	✓				
4"	✓				
6"	✓				
5/8" DIAMETER STANDOFF BARRELS					
Length	AL	BL	BR	SS	
3/16"	✓				
1/2"	✓				
5/8"	✓				
1"	✓	✓			
1-1/2"	✓				
2"	✓				
3"	✓				
5-3/4"	✓				
9-3/4"	✓				
11-3/4"	✓				
3/8" DIAMETER STANDOFF BARRELS					
Length	AL	BL	BR	SS	
1/2"	✓	✓			
5/8"	✓	✓			
1"	✓	✓			
1/4" DIAMETER STANDOFF BARRELS					
Length	AL	BL	BR	SS	
5/16"	✓				

DEMO CARD
(Back)

BUILD-YOUR-OWN DEMO

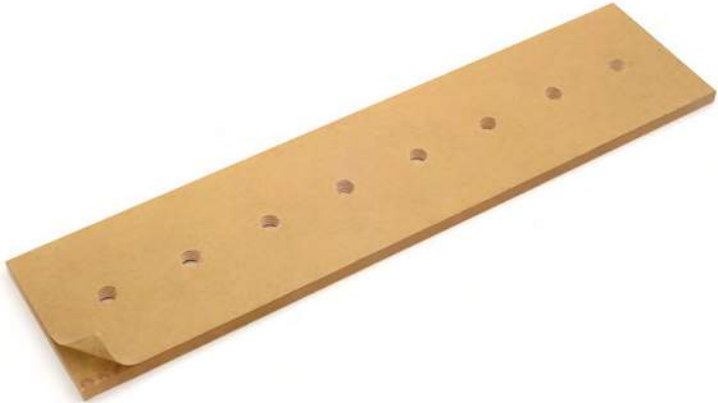


PART	DEMONSTRATES
DEMO-PLEX2	Configure with personalized components

- Note
- Comes with 8 5/16-18 tapped holes
 - Call for help selecting products for a custom-built demonstration display

Custom Colors and Finishes

Products by Gyford Standoff Systems can be made in a wide variety of custom colors and finishes. Colors and finishes are available on a made-to-order basis. Charges will vary based on quantity and finish and may require additional time to ship.

Stock Finish

 Our standard products are made from U.S. sourced aluminum, then anodized with a clear satin finish. We also manufacture a selection of products from #316 stainless steel.

Limited Stock Custom Colors

 Limited sizes of black and brass anodized Standoffs are kept in stock without the typical wait-time of a custom order.

Custom Colors

We offer many custom anodized color coatings as well as the entire RAL palette for powder coating.

Note: The anodized colors represented online or in print may vary from actual goods. The actual color may vary per part based upon various conditions (ie: types of materials, types of mfg. process, the actual anodize process, etc). Anodized and plated parts are not recommended for outdoor use or high UV areas as they may be subject to color fading.

Examples of custom color and finishing options are provided below.



 Black Anodize	 Brass Anodize	 Antique Brass Anodize	 Copper Anodize	 Tan Anodize	 Bronze Anodize
 Red Anodize	 Pink Anodize	 Purple Anodize	 Blue Anodize	 Graphite Anodize	 Green Powder Coated
 Clear Anodize	 Brushed Clear Anodize	 Polished Clear Anodize	 Polished Stainless	 Polished Chrome	 Brushed Nickel
 Flat White Powder Coated	 Flat Black Powder Coated	 Gloss White Powder Coated	 Oil Rubbed Bronze Powder Coated	 Machine Stainless	 Brushed Stainless

Frequently Asked Questions

How can I buy Gyford products?

Gyford StandOff Systems® products can be purchased by phone, on our website or through a retailer. Because we are the manufacturer and sell only to resellers and trades, we need some paperwork to get you started.

When ordering from us for the first time, please provide one of the following:

- **Resale or sales and use tax certificate.**
This shows us you will be reselling or using our product to complete services for your client.
- **Tax Exemption Certificate.**
This document allows you to make a tax-free purchase.

When will my order ship?

During regular business hours, if you place an order for stock parts before 12:00 p.m. (PST) your order will ship the same day.


If you place an order for stock parts after 12:00 p.m. (PST) or on a non-business day, your order will ship the next business day.

Do you make custom parts?

Yes, we do. Call us at 775.829.7272 or send an email to info@standoffsystems.com. We will be happy to speak with you about your project and provide you with a quote. Lead times are determined by our custom machine shop schedule.

What will I be asked when placing an order?

1. **What's your project?**
We start by asking what type of project you are working on (signage, shelving, display). If you have a complicated project that requires a visual aid, we ask that you email us a sketch so we can be sure to get you the right products for your application(s).
 2. **What is your material and its thickness?**
Our standoffs are tapped to a specific depth, allowing a range of material thicknesses to be used. We need to know your material thickness in order to provide the correct length of threaded rod for your project. Weight is also a consideration in standoffs, rod, and wire installations. By determining the material type and size, we are able to calculate the overall weight of the project. This helps to ensure that we are specifying the correct systems and hardware for your application.
 3. **What are you mounting to?**
To determine the best anchor for your project, we'll need to know what surface you are mounting to. Common mounting surfaces include drywall, wood, metal or concrete.
- Visit our website for more frequently asked questions: standoffsystems.com/FAQ

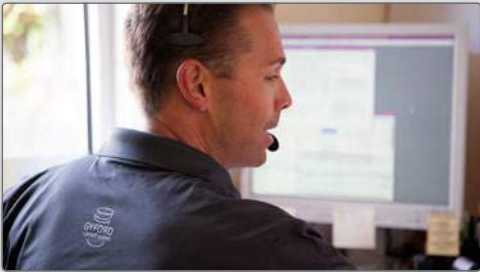

Our Customer Support Team is here to help

- Call Us:**
775.829.7272
Monday - Friday
7:00 a.m. - 3:30 p.m. (PST)

Email Us:
info@standoffsystems.com
- Full design support
 - Installation guidance
 - Free quotes
 - Send us a sketch or .dwg

Golden West Electric Sign Company
Boise, ID



Signarama
Albuquerque, NM



Let's see your installations!

Go to standoffsystems.com/photo-submission
We would love to credit your photos on our website and advertising



SRRA-Experiential Graphic Design
& Option Signs, GA



Dahlen Sign Company
Shakopee, MN



DESIGN SUPPORT

We pledge to deliver the best service available. We are prepared to take on any project, idea or custom design and make it work for you.



QUALITY PRODUCT

Through precision manufacturing and strict quality control, we continue to provide mounting hardware with a unique look, feel and quality.

MADE
in
the **USA**

RENO, NEVADA

We manufacture our aluminum and stainless steel hardware in Reno, Nevada and proudly source our materials from the USA.

SHOP ONLINE
standoffsystems.com

